
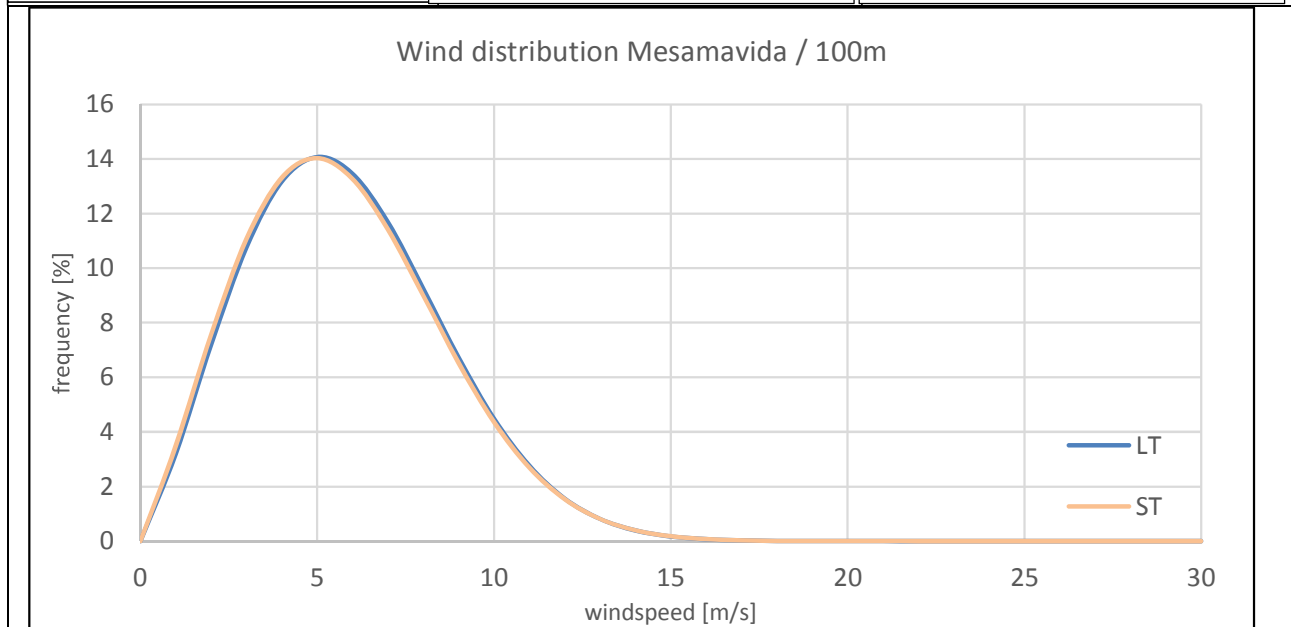


	Energy Yield Assessment Report Mesamavida (CL) 14 x N149/4.0-4.5 (Mode 0.a) TS145-01 IEC S	E0004857897 Revision 06 2020-03-31
---	--	--

A1.2 Met mast wind conditions

Mast: Mesamavida

Coordinate System:	WGS 84 / UTM zone 18S			
Coordinates:	X: 723003	Y: 5841923	Elevation:	90.3 m a.s.l
Measurement heights [m]:	100, 99.9, 65, 50			
Measurement period:	9/5/2012 - 12/10/2017		63 months	
	Long-term period (LT)		Measurement period (ST)	
Mean wind speed:	5.79 m/s		5.64 m/s	
Weibull parameters:	v: 5.84	A: 6.60	k: 2.242	v: 5.78 A: 6.53 k: 2.200
Prevailing wind directions:	S / N		S / N	

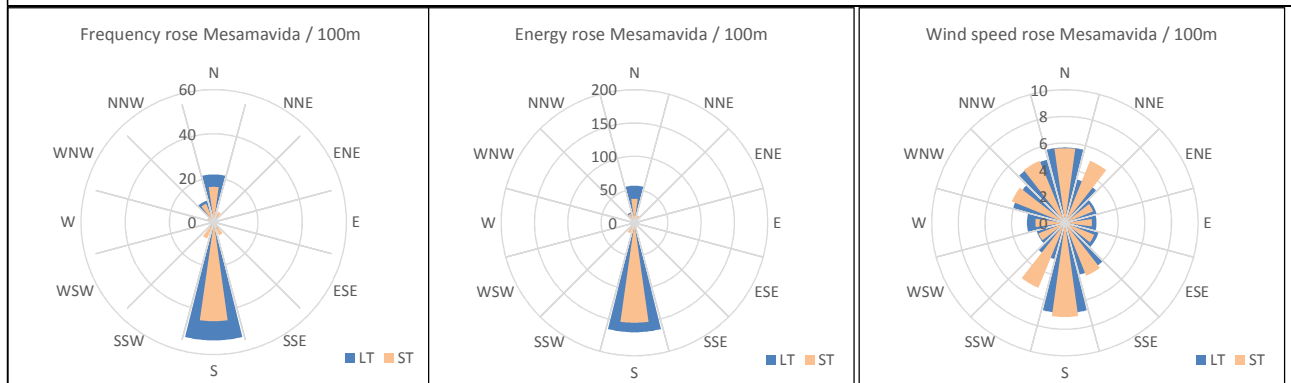

	Energy Yield Assessment Report Mesamavida (CL) 14 x N149/4.0-4.5 (Mode 0.a) TS145-01 IEC S	E004857897 Revision 06 2020-03-31
---	---	---

A1.3 Turbine specific wind conditions

- Turbulence results include effects of wind sector / wind velocity management (see Site Assessment Report [1]).

Coordinate System: WGS 84 / UTM zone 18S

Turbine Name	Turbine Type	Hub height [m]	East [m]	South [m]	Altitude [m]	Distance to closest WTG [D]	v [m/s]	A [m/s]	k [-]	Wind Shear [-]	Air Density [kg/m³]	max Flow Angle [°]	Direction of max flow angle [°]	TI IEC sub-class	Vref [m/s]	WSM / WVM applied
T01-AE01	N149/4.0-4.5 (Mode 0.a)	145.0	721798	5848887	101	2.08	7.06	7.97	2.240	0.39	1.209	-0.5	0	S	29.7	-
T02-AE02	N149/4.0-4.5 (Mode 0.a)	145.0	722108	5848887	105	1.83	7.04	7.95	2.244	0.39	1.208	-0.6	60	S	29.7	Yes
T03-AE03	N149/4.0-4.5 (Mode 0.a)	145.0	722381	5848878	105	1.83	7.03	7.93	2.244	0.39	1.208	-0.7	60	S	29.7	-
T04-AE05	N149/4.0-4.5 (Mode 0.a)	145.0	722868	5846618	110	7.01	6.96	7.86	2.252	0.40	1.208	0.7	0	S	29.5	-
T05-AE06	N149/4.0-4.5 (Mode 0.a)	145.0	723524	5847430	109	5.96	6.97	7.87	2.248	0.39	1.208	0.4	30	S	29.8	-
T06-AE07	N149/4.0-4.5 (Mode 0.a)	145.0	724542	5848018	110	2.01	6.92	7.81	2.248	0.39	1.208	-0.3	120	A	29.4	-
T07-AE08	N149/4.0-4.5 (Mode 0.a)	145.0	724841	5848005	110	2.01	6.90	7.79	2.252	0.40	1.208	-0.6	90	A	29.4	-
T08-AE09	N149/4.0-4.5 (Mode 0.a)	145.0	724138	5846788	115	2.67	6.98	7.88	2.248	0.39	1.207	0.2	0	S	29.8	-
T09-AE10	N149/4.0-4.5 (Mode 0.a)	145.0	724530	5846852	115	2.67	6.98	7.88	2.244	0.39	1.207	-0.3	90	A	29.8	-
T10-AE12	N149/4.0-4.5 (Mode 0.a)	145.0	723249	5843204	127	5.29	7.24	8.17	2.240	0.37	1.206	0.4	0	A	30.9	Yes
T11-AE13	N149/4.0-4.5 (Mode 0.a)	145.0	723996	5842719	108	5.98	6.90	7.79	2.240	0.39	1.208	-0.9	0	S	30.1	-
T12-AE14	N149/4.0-4.5 (Mode 0.a)	145.0	723144	5842423	98	5.29	6.79	7.67	2.252	0.42	1.209	-1.9	0	S	29.3	-
T13-AE15	N149/4.0-4.5 (Mode 0.a)	145.0	723547	5841338	91	7.77	6.91	7.81	2.244	0.39	1.210	-0.8	60	S	29.6	-
T14-AE04	N149/4.0-4.5 (Mode 0.a)	145.0	721569	5846980	105	9.05	6.97	7.87	2.248	0.40	1.208	0.5	0	S	29.5	-