

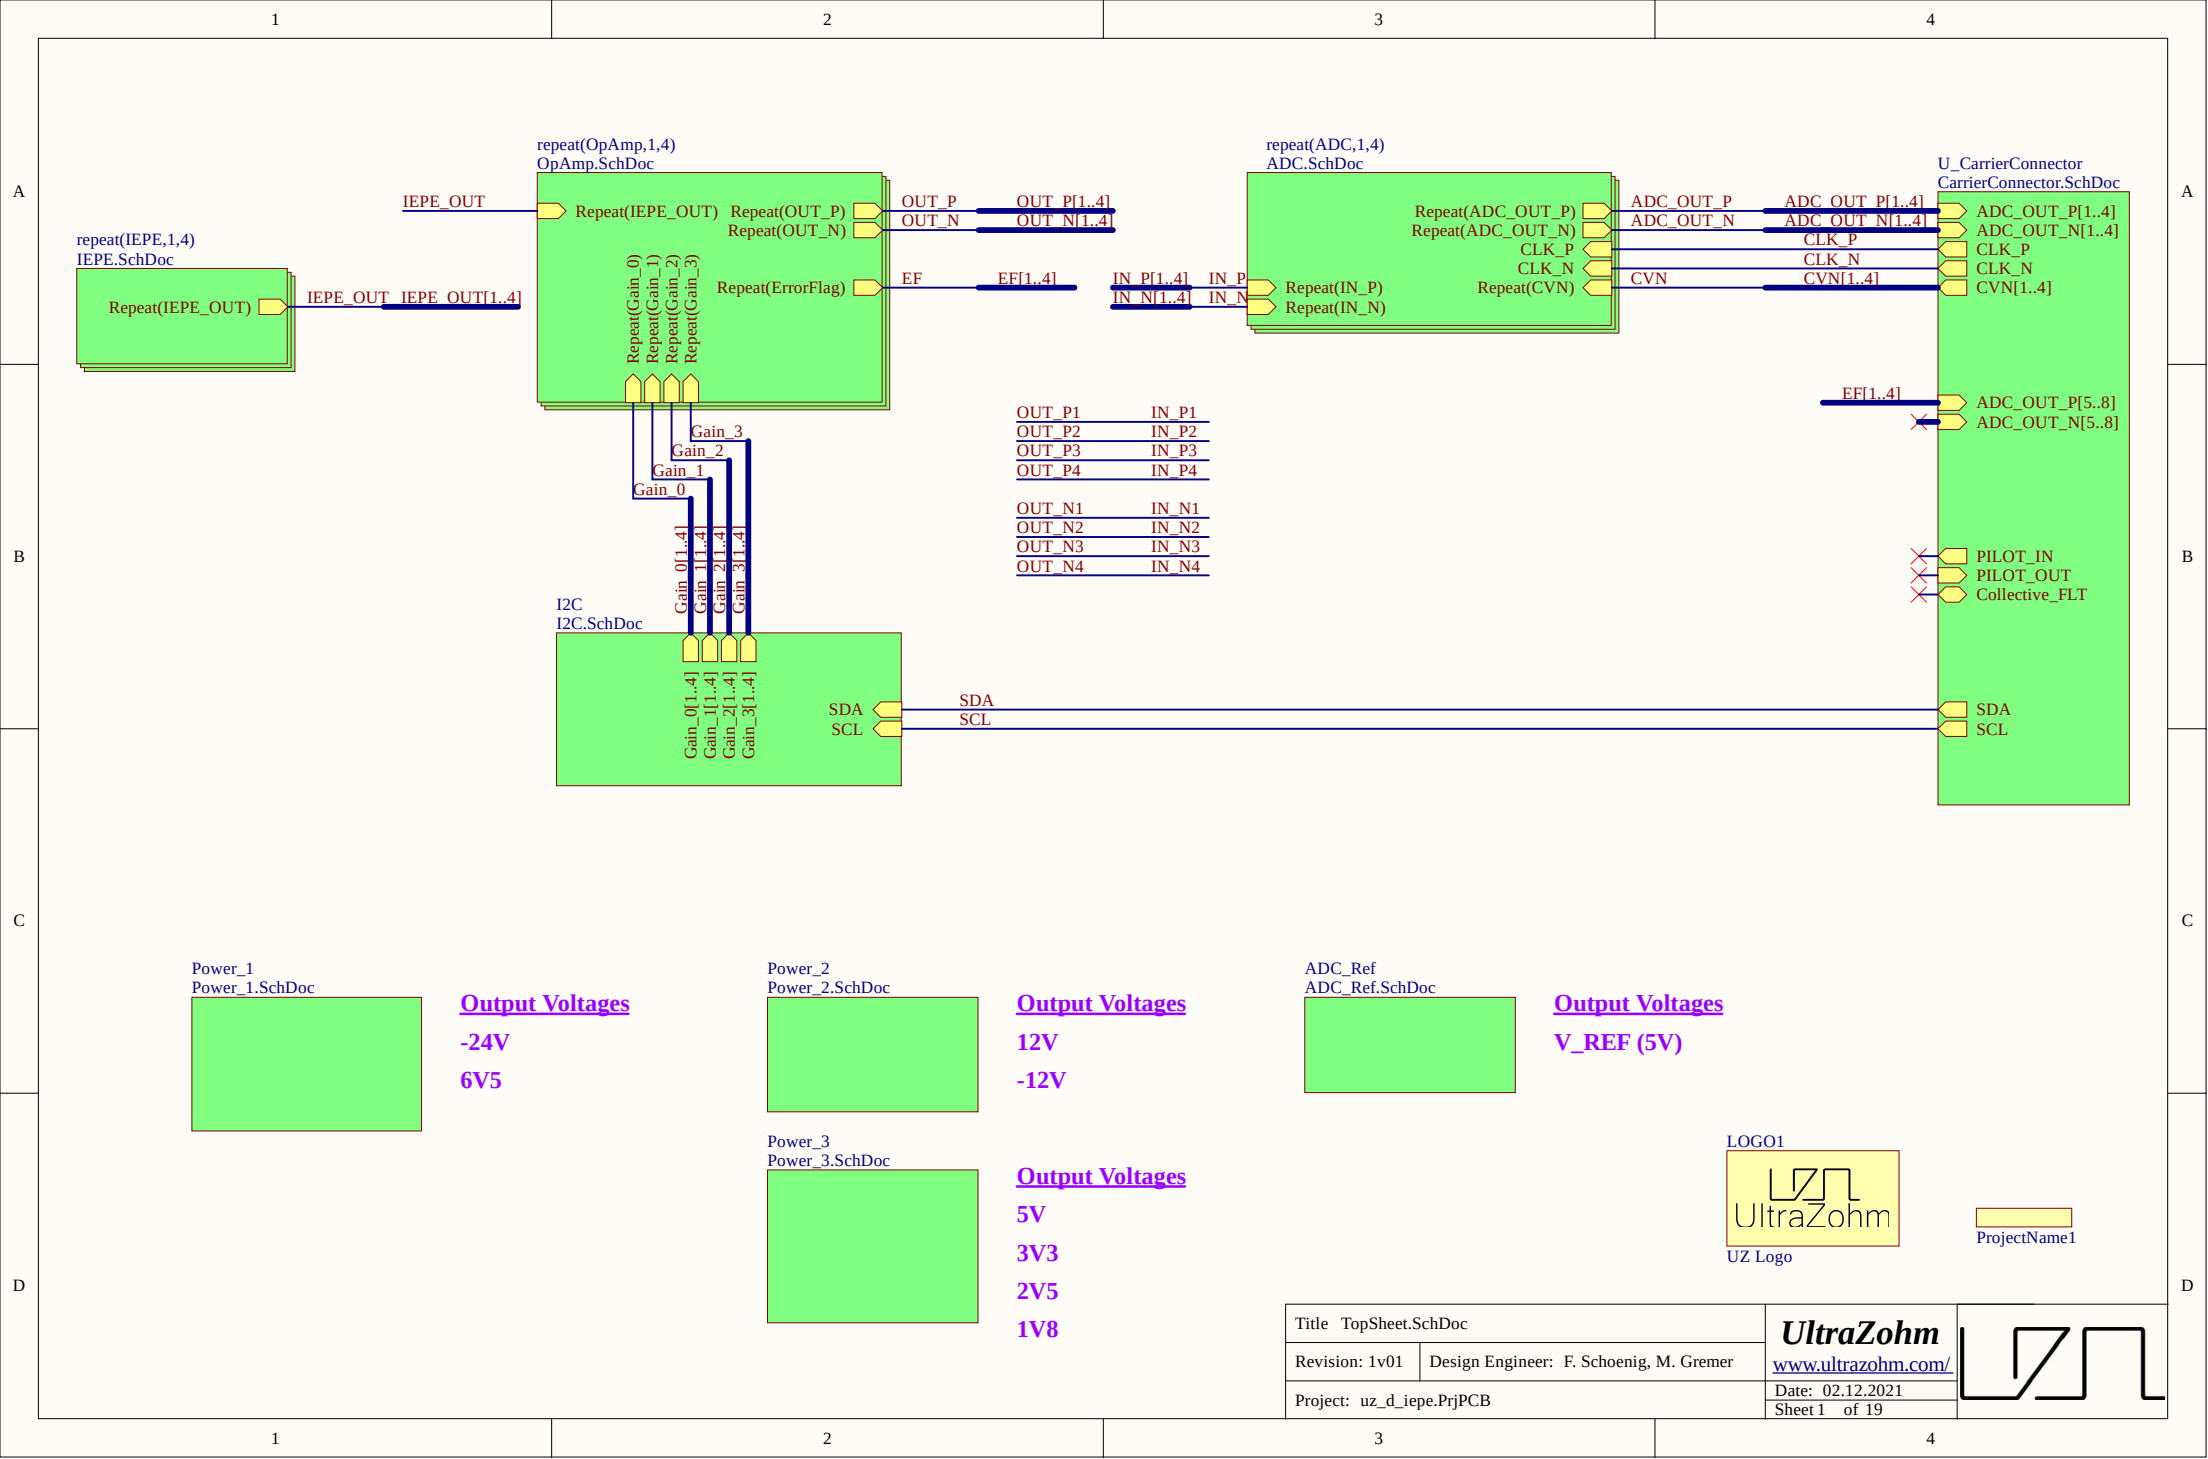
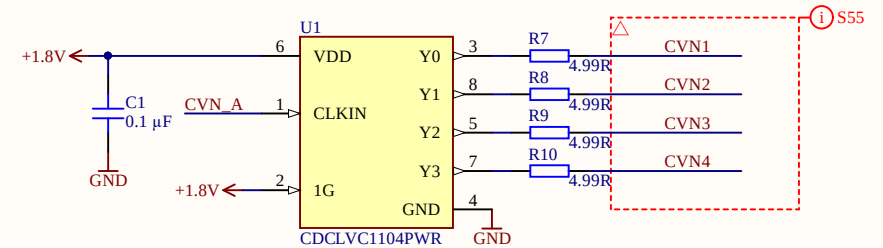
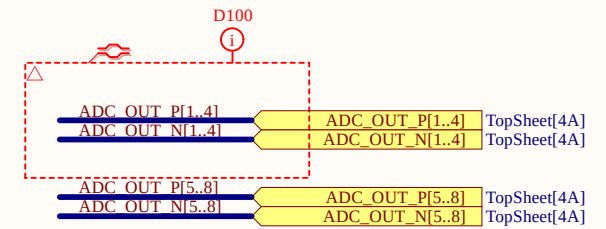


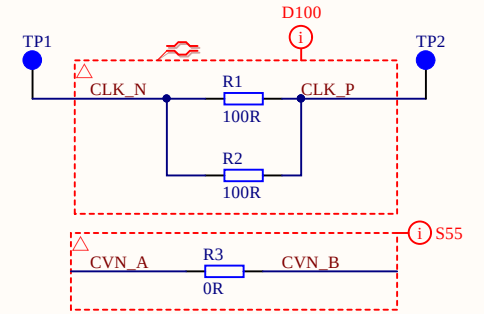


Important!!!


This adapter card requires 24 V at the VIN Pins. It was not designed for a voltage VIN of 12 V.

X1
HSEC8-140-01-XX-DV-A-BL-CARD

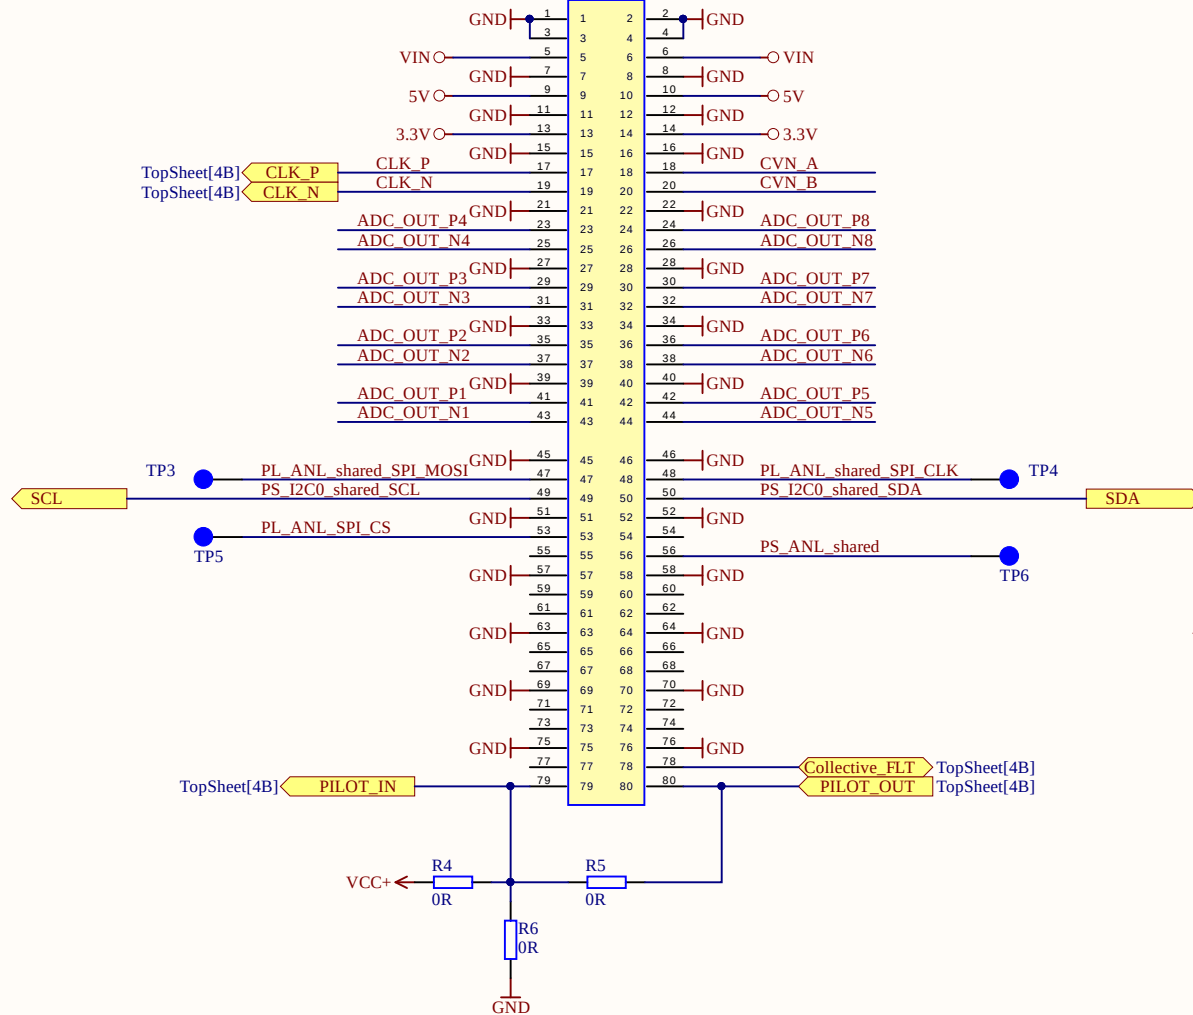


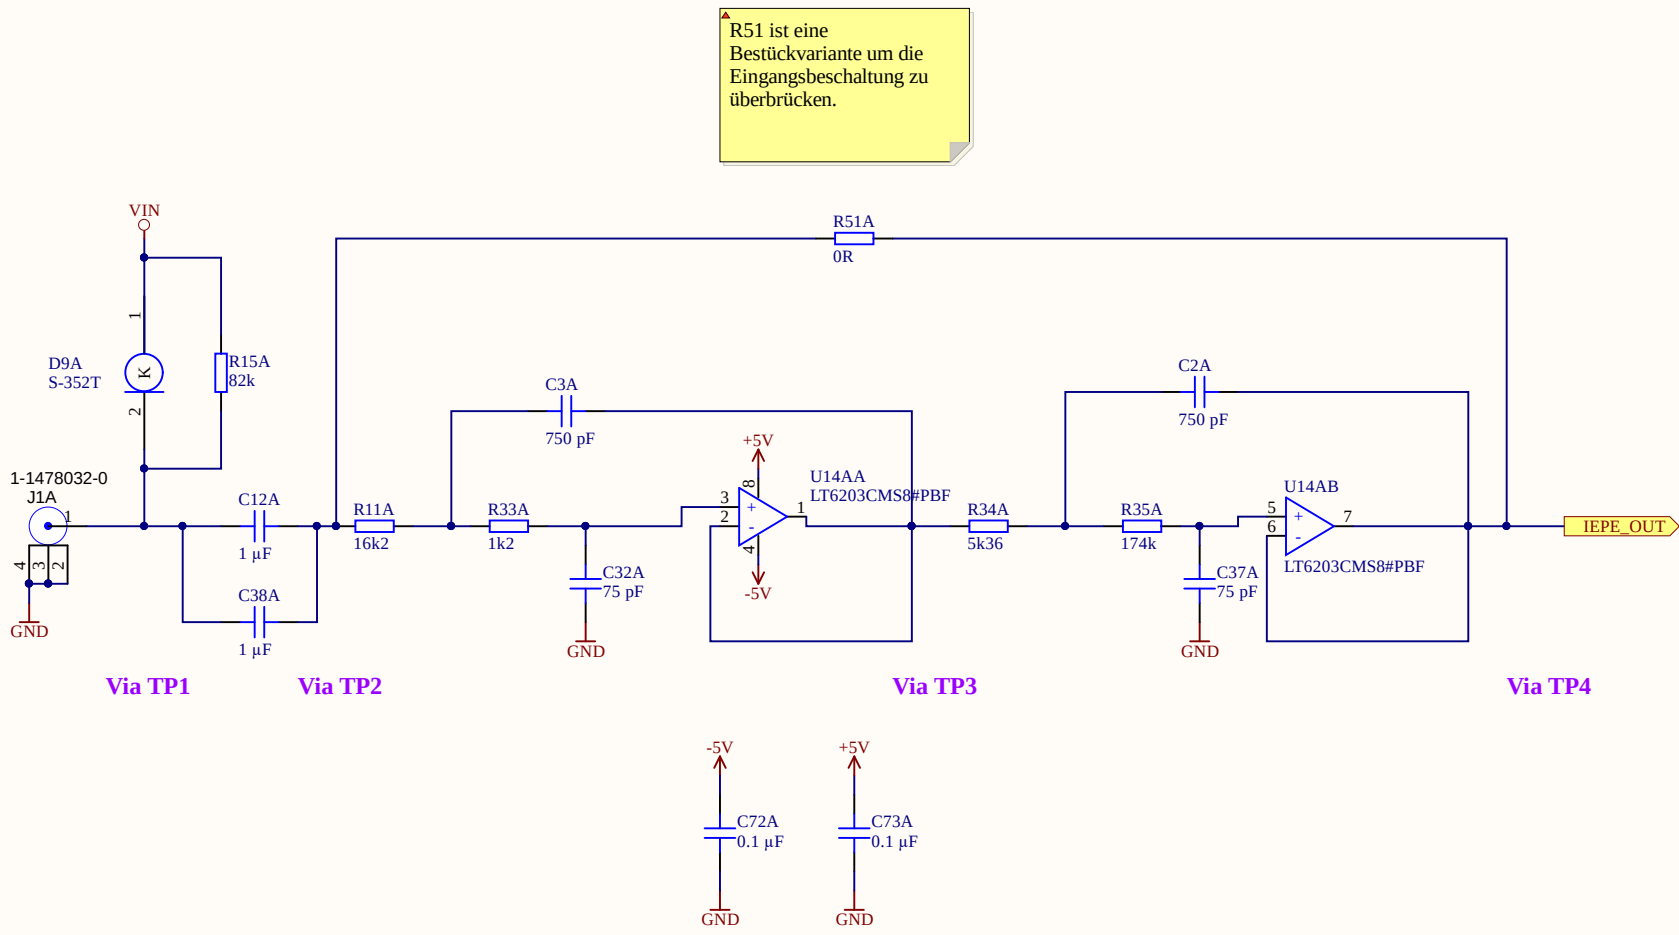



R51 ist eine Bestückvariante um die Eingangsbeschaltung zu überbrücken.

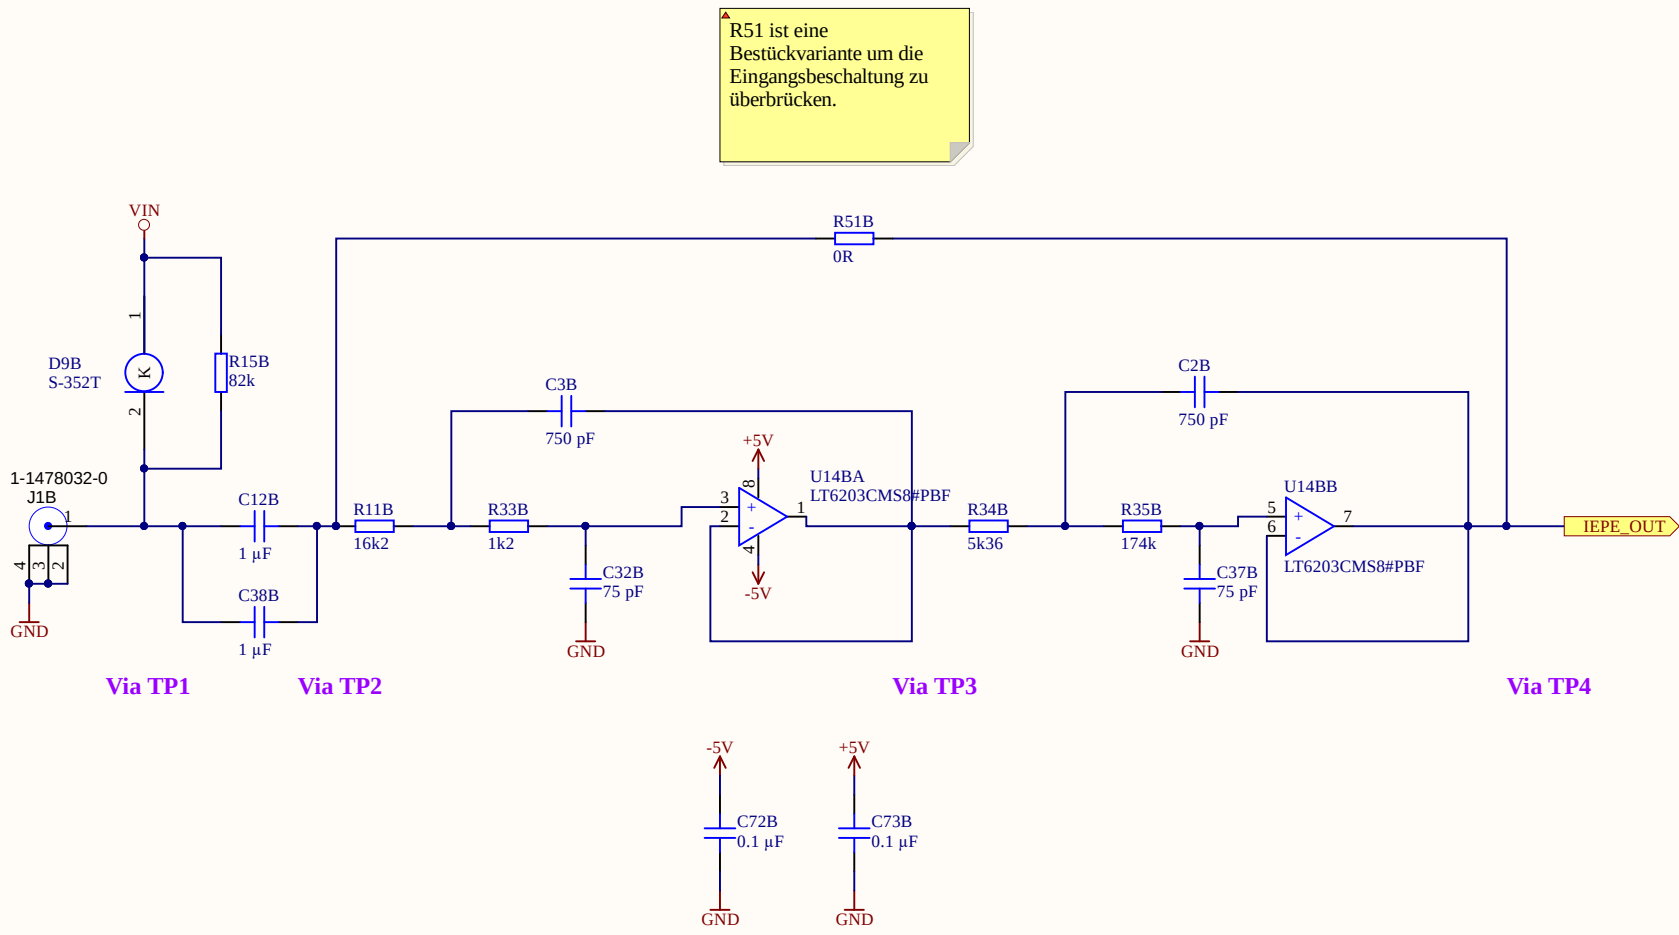

▲ R51 ist eine Bestückvariante um die Eingangsbeschaltung zu überbrücken.

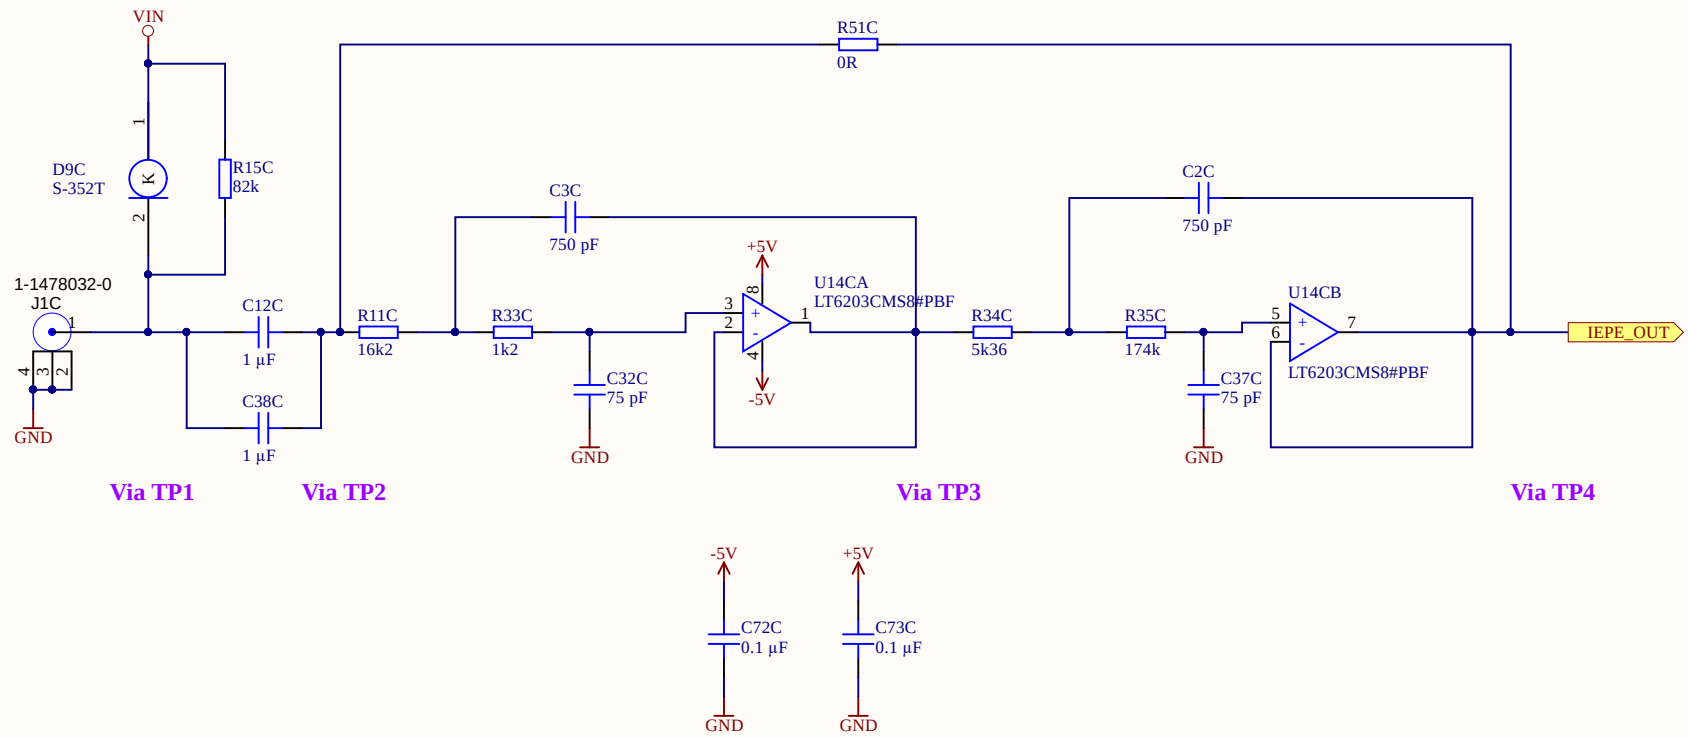

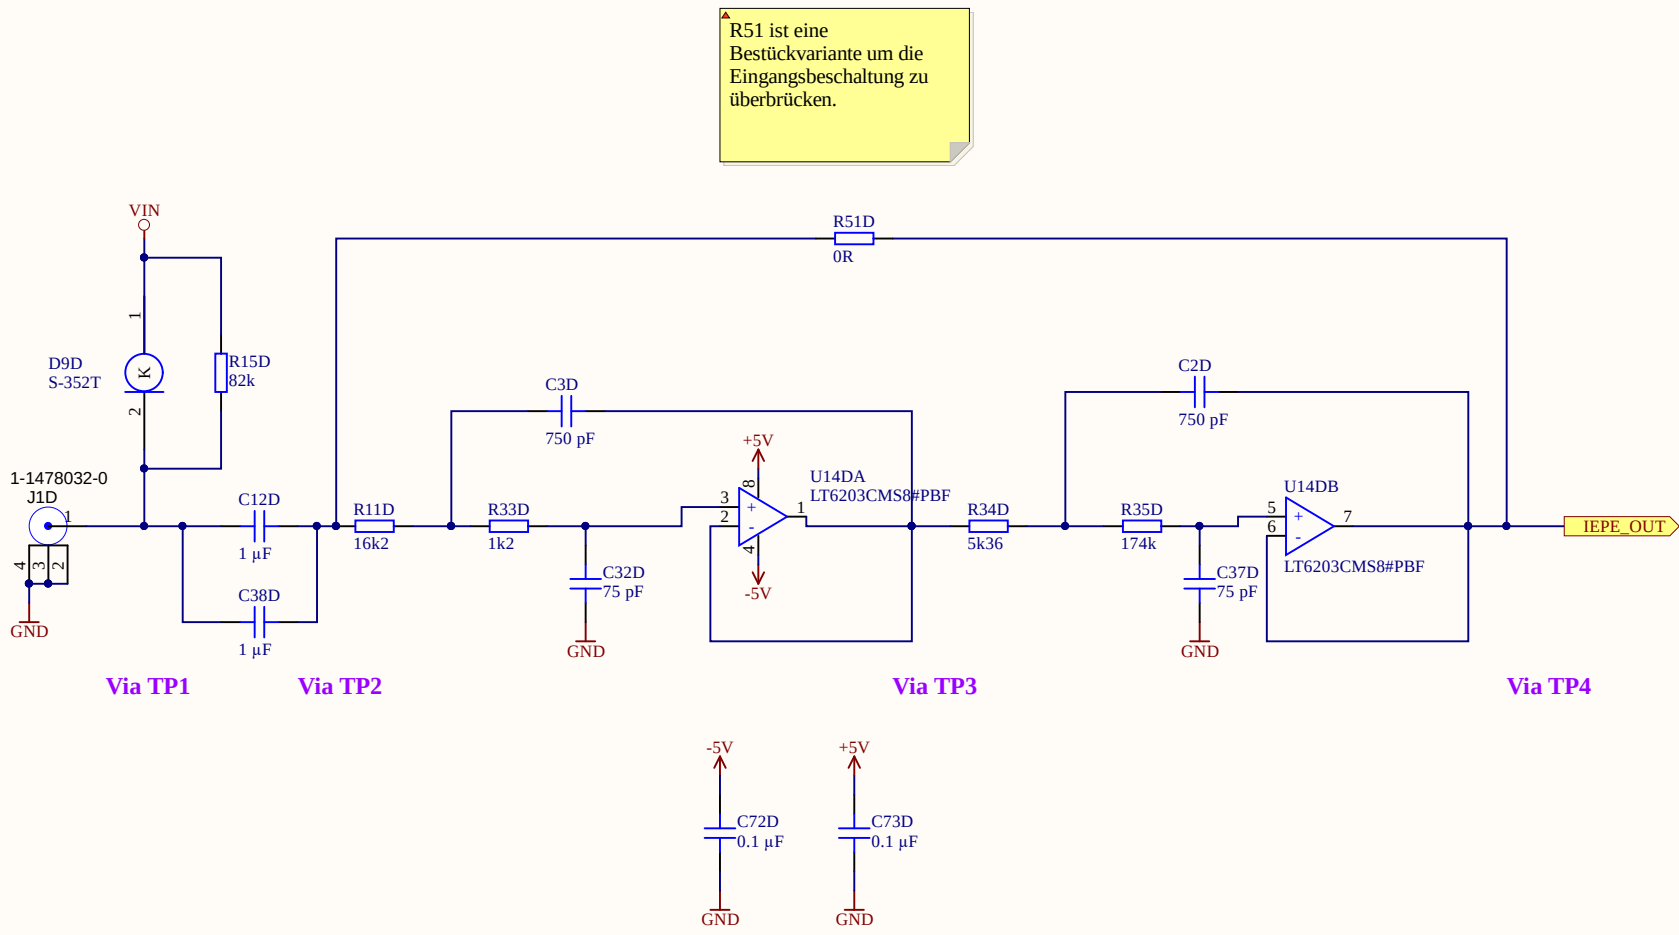


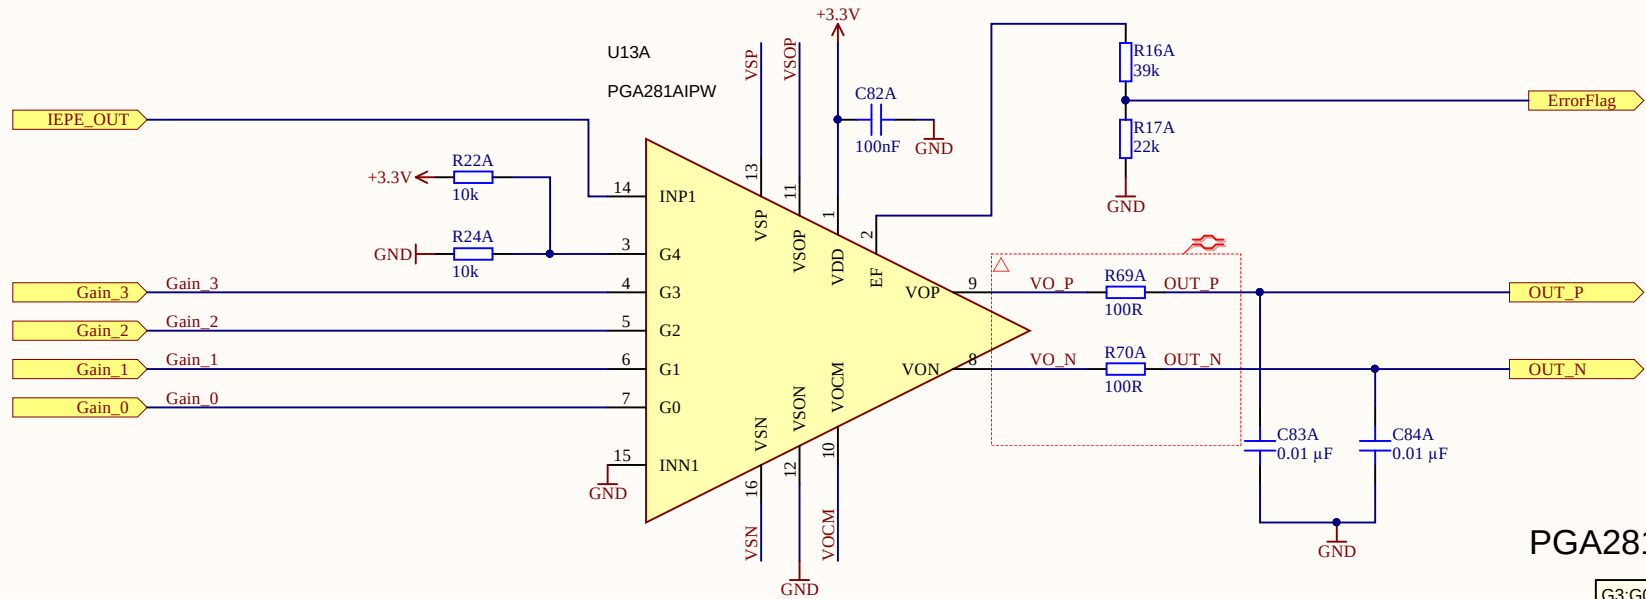



PGA281 Gain Table

G3:G0	G4=0	G4=1
0000	0.125	0.172
0001	0.25	0.344
0010	0.5	0.688
0011	1	1.375
0100	2	2.75
0101	4	5.5
0110	8	11
0111	16	22
1000	32	44
1001	64	88
1010	128	176
1011*	0.125	0.172
1100*	0.125	0.172
1101*	0.125	0.172
1110*	0.125	0.172
1111*	0.125	0.172

* Reserved

Alternative zu PC um die Verstärkung einzustellen

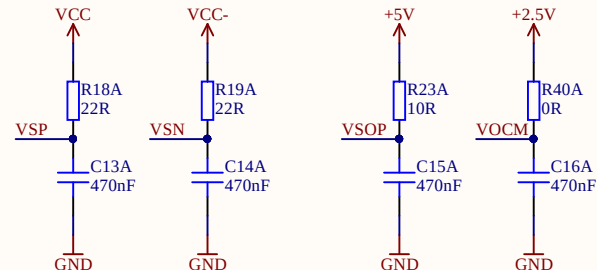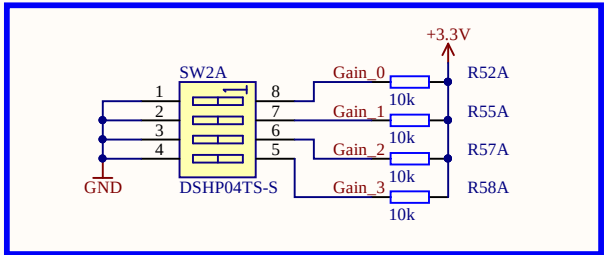


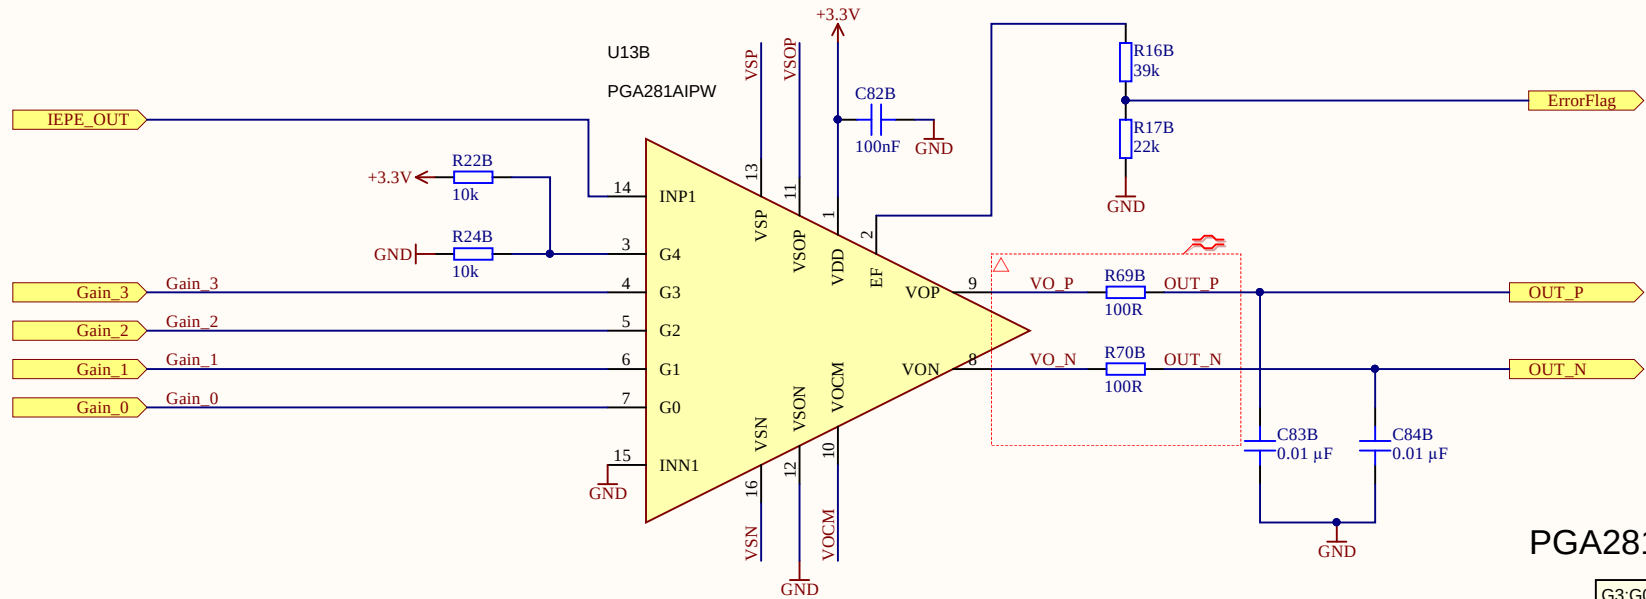



PGA281 Gain Table

G3:G0	G4=0	G4=1
0000	0.125	0.172
0001	0.25	0.344
0010	0.5	0.688
0011	1	1.375
0100	2	2.75
0101	4	5.5
0110	8	11
0111	16	22
1000	32	44
1001	64	88
1010	128	176
1011*	0.125	0.172
1100*	0.125	0.172
1101*	0.125	0.172
1110*	0.125	0.172
1111*	0.125	0.172

* Reserved

Alternative zu PC um die Verstärkung einzustellen

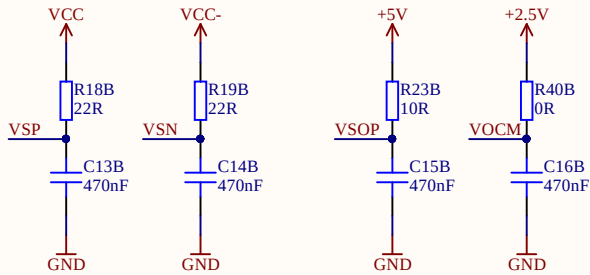
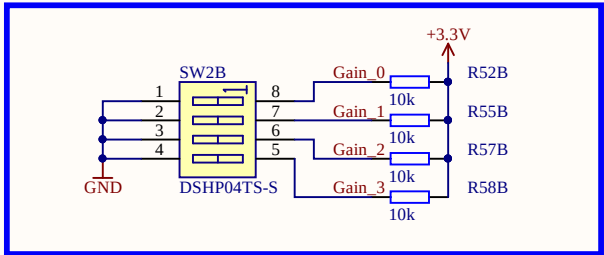


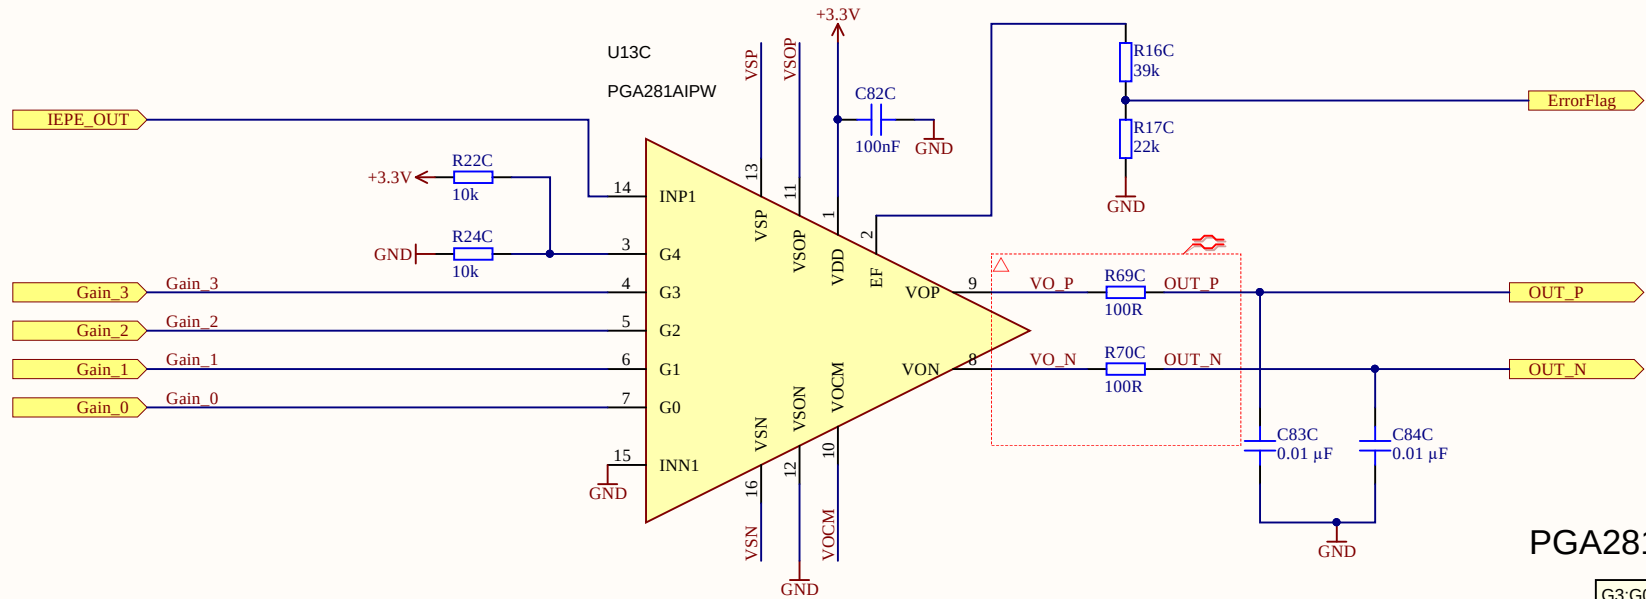


PGA281 Gain Table

G3:G0	G4=0	G4=1
0000	0.125	0.172
0001	0.25	0.344
0010	0.5	0.688
0011	1	1.375
0100	2	2.75
0101	4	5.5
0110	8	11
0111	16	22
1000	32	44
1001	64	88
1010	128	176
1011*	0.125	0.172
1100*	0.125	0.172
1101*	0.125	0.172
1110*	0.125	0.172
1111*	0.125	0.172

Alternative zu PC um die Verstärkung einzustellen

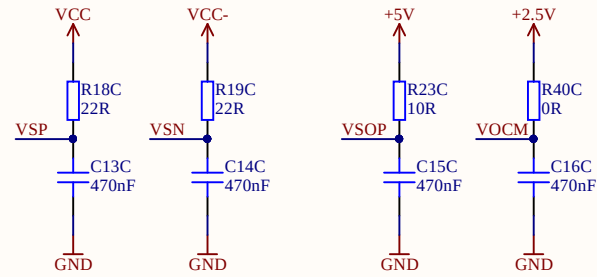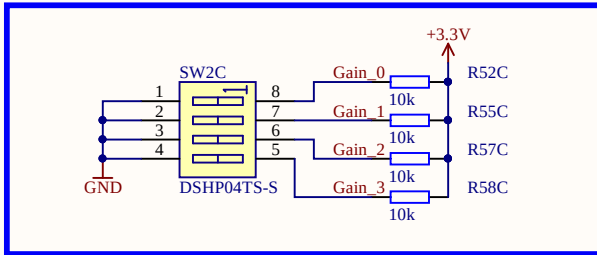


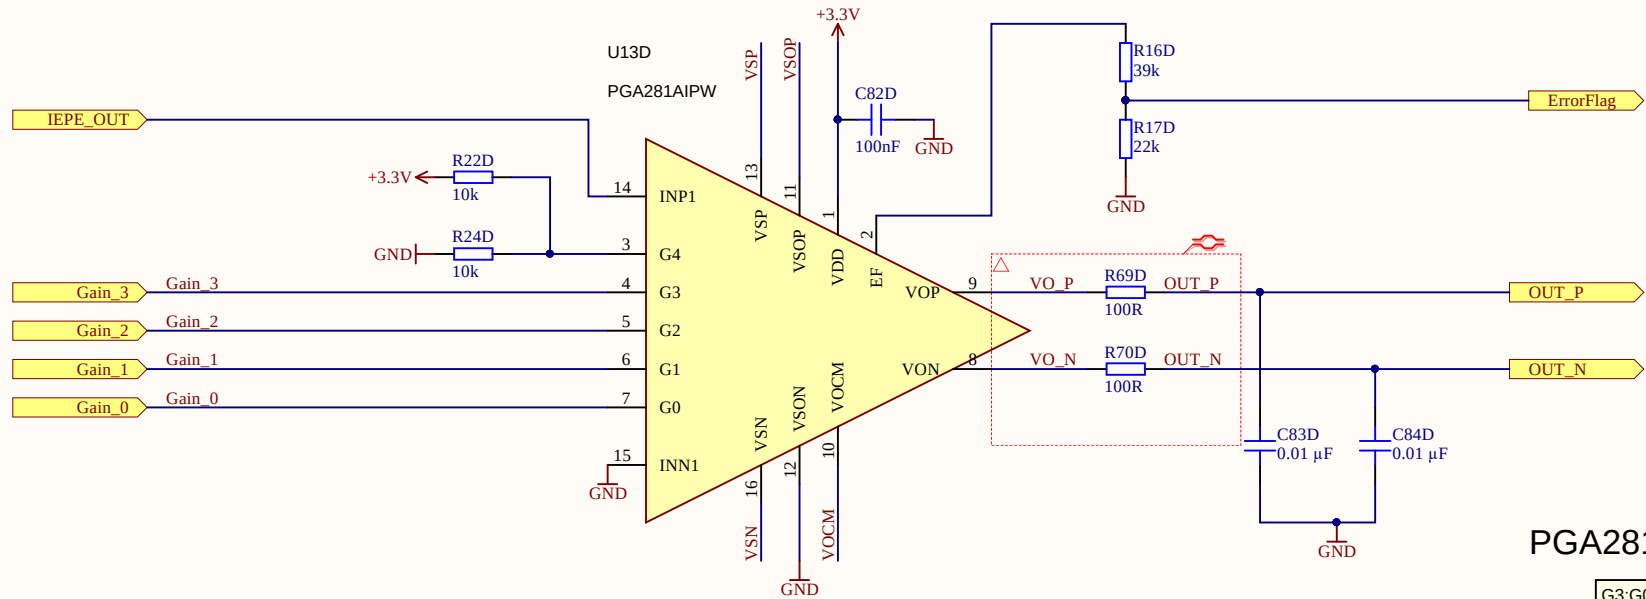


PGA281 Gain Table


G3:G0	G4=0	G4=1
0000	0.125	0.172
0001	0.25	0.344
0010	0.5	0.688
0011	1	1.375
0100	2	2.75
0101	4	5.5
0110	8	11
0111	16	22
1000	32	44
1001	64	88
1010	128	176
1011*	0.125	0.172
1100*	0.125	0.172
1101*	0.125	0.172
1110*	0.125	0.172
1111*	0.125	0.172

* Reserved

Alternative zu PC um die Verstärkung einzustellen

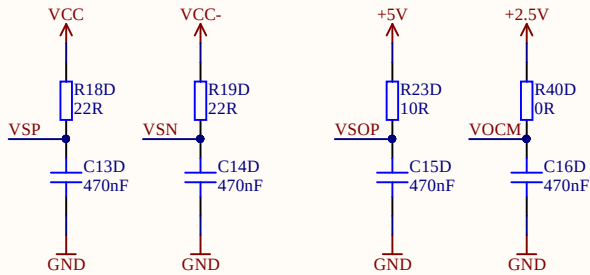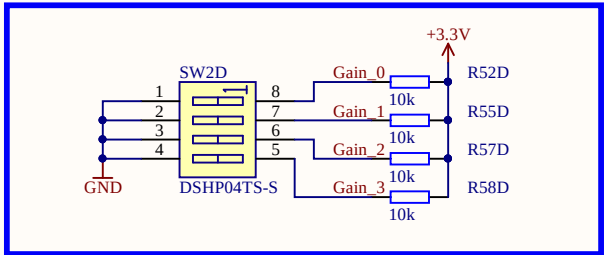


•

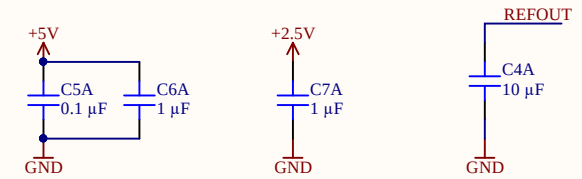


•


4



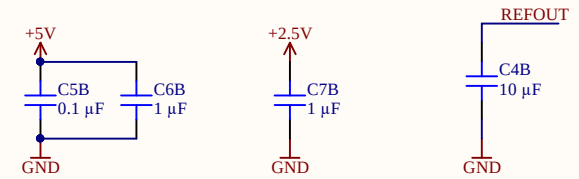
4


4

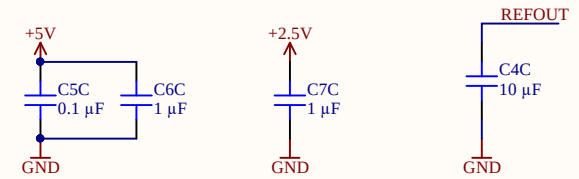4

Title ADC.SchDoc	
Revision: 1v01	Design Engineer: F. Schoenig, M. Gremer
Project: uz_d_iepe.PrjPCB	

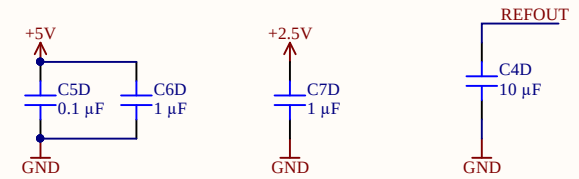

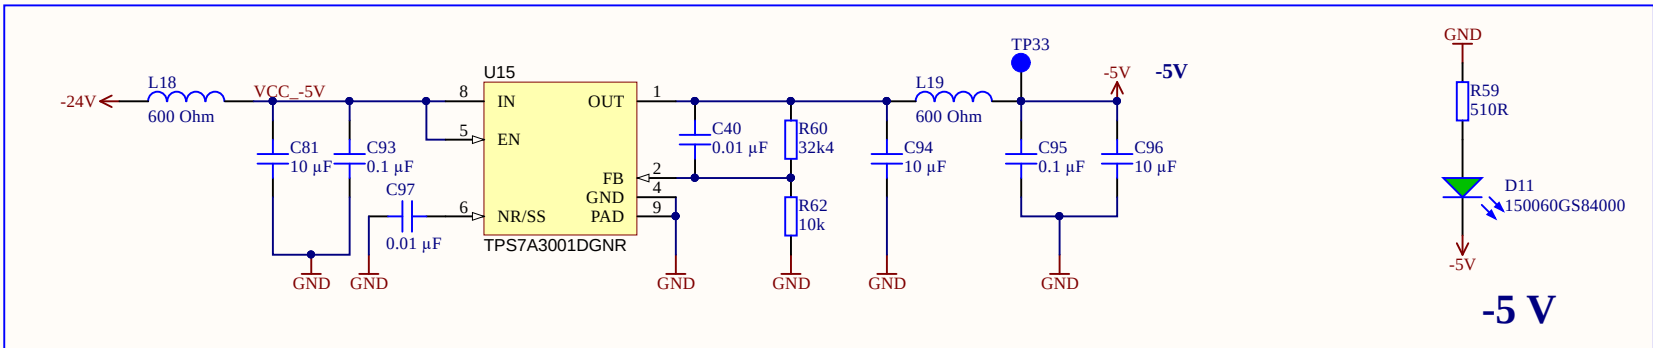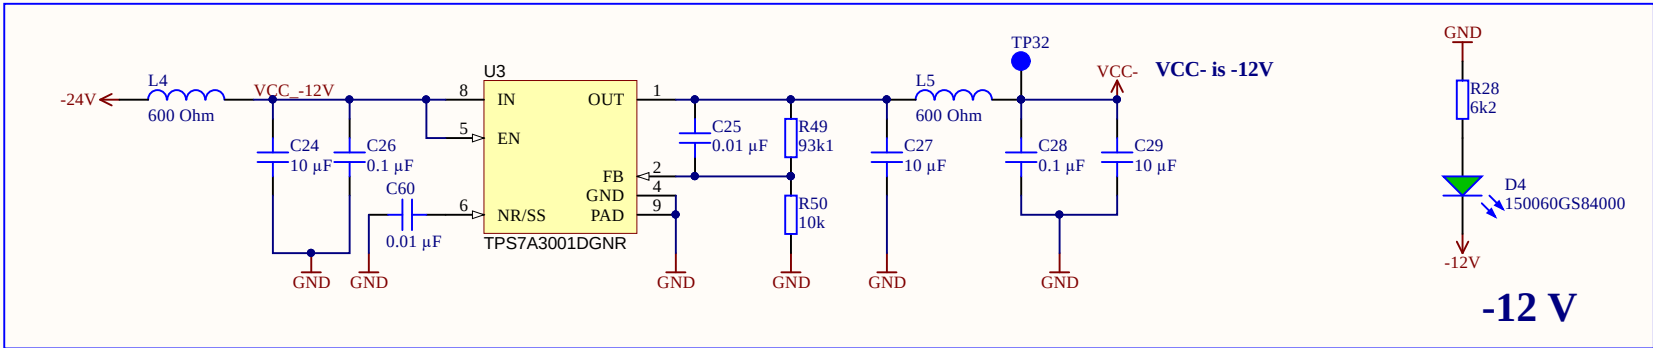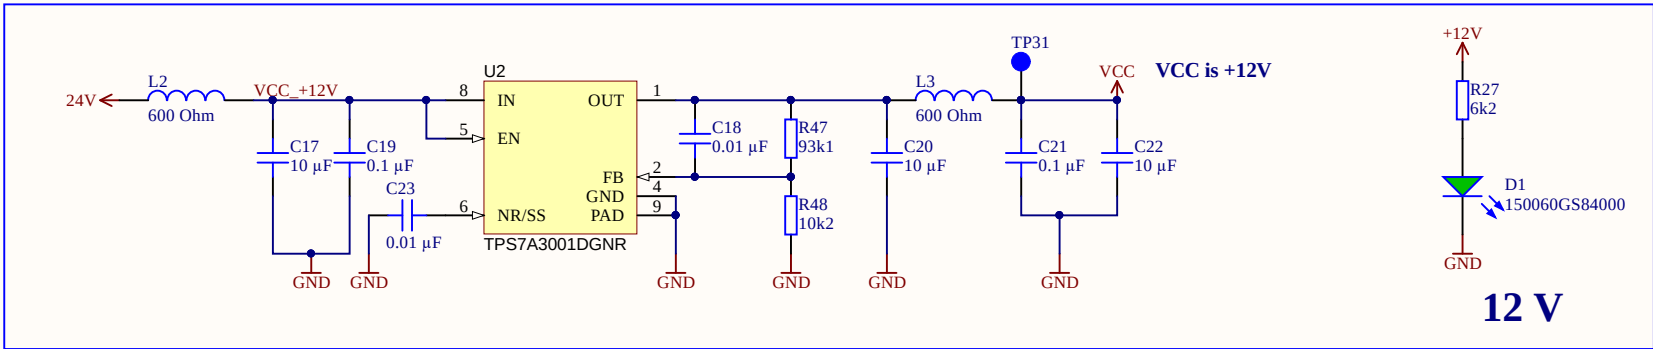

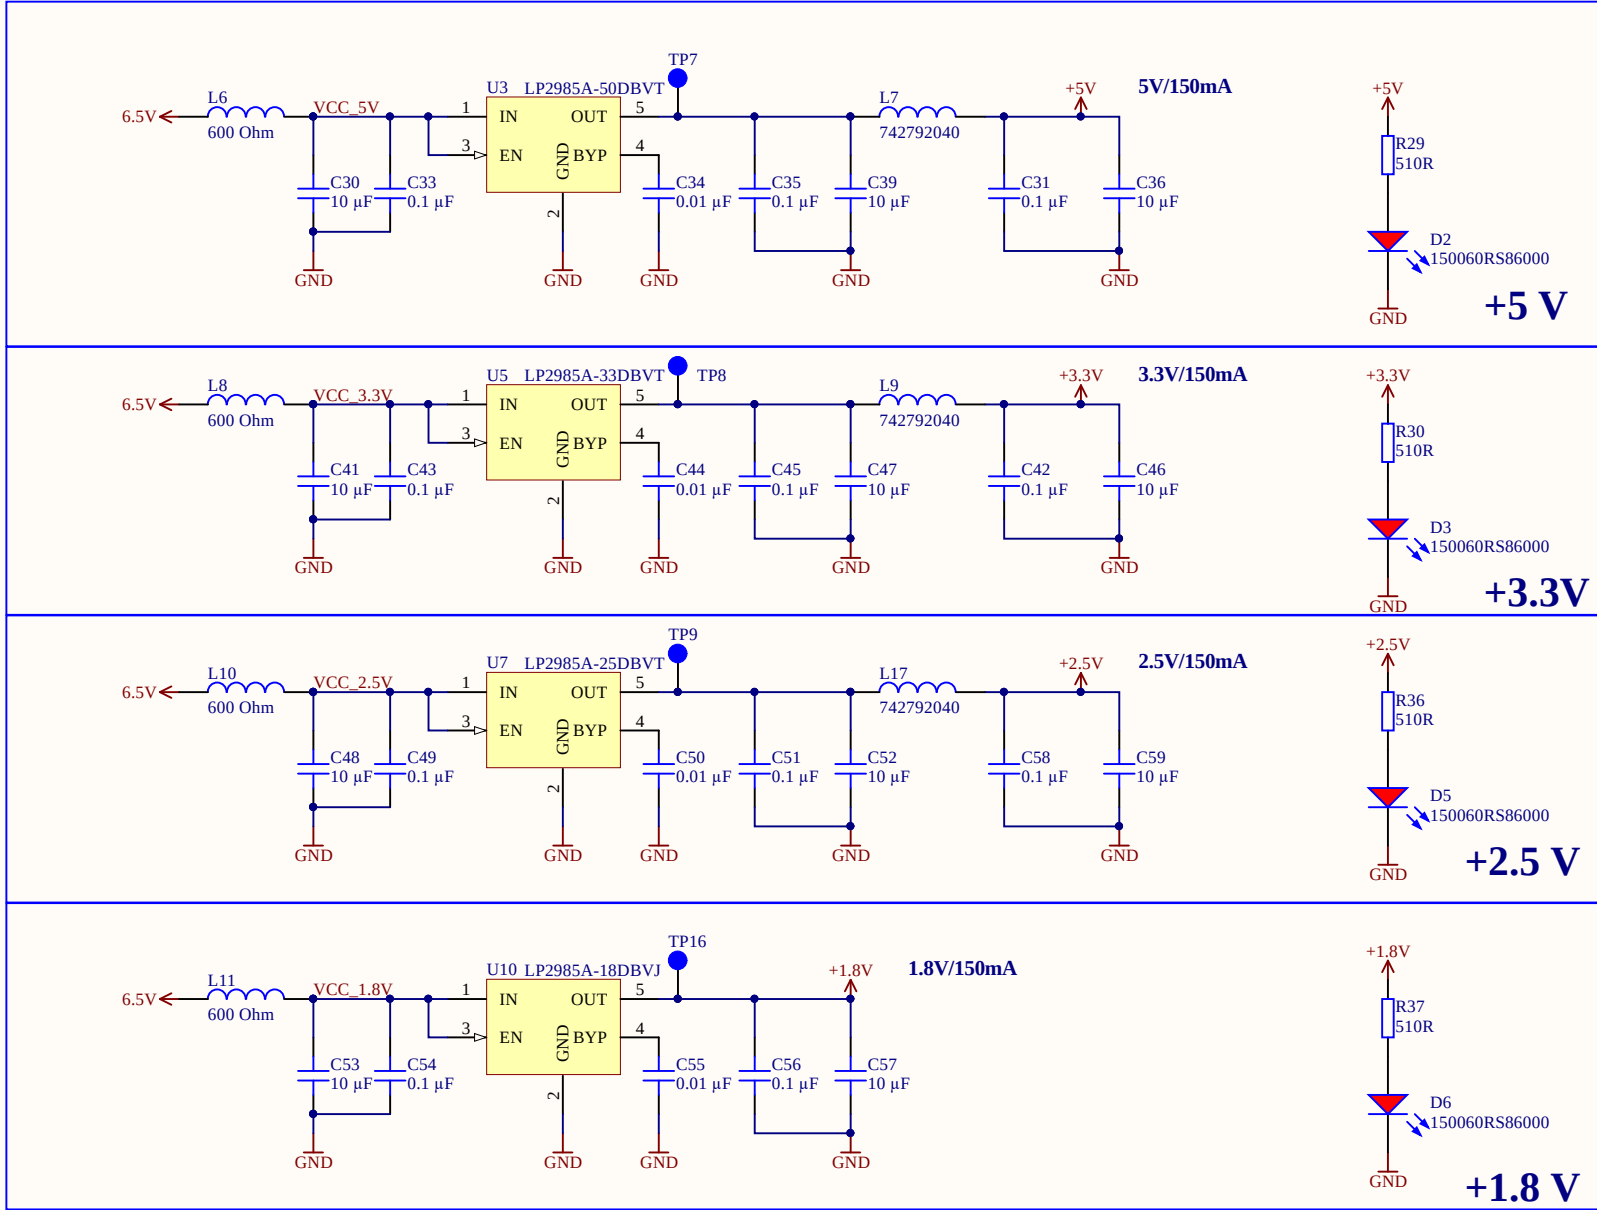

Title Power_3.SchDoc

Revision: 1v01

Design Engineer: F. Schoenig, M. Gremer

Project: uz_d_iepe.PrjPCB


UltraZohm

www.ultrazohm.com/


Date: 02.12.2021

Sheet 7 of 19



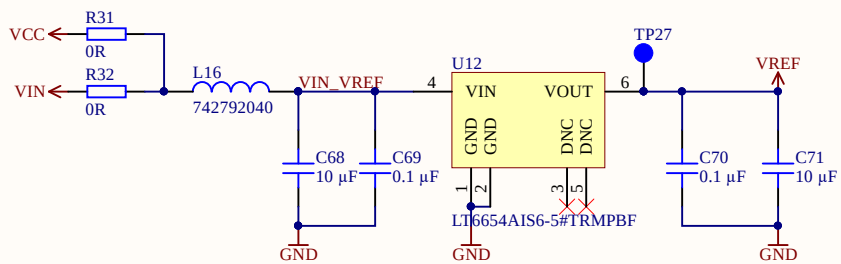

- 1. LT6654 is available in 1.25V/2.048V/2.5V/3V/3.3V/4.096V/5V
 - 2. If the internal reference from LTC2311 (4.096V) is used, U3 is DNP, at LTC2311 REFIN needs to be connected to a cap to GND, and REFOUT disconnected
 - 3. LTC2311 REFOUT max current sink is 700uA.
- $8\text{ADCs} \times 0.7\text{mA} = 5.6\text{mA} < 10\text{mA}$ max output current of LT6654

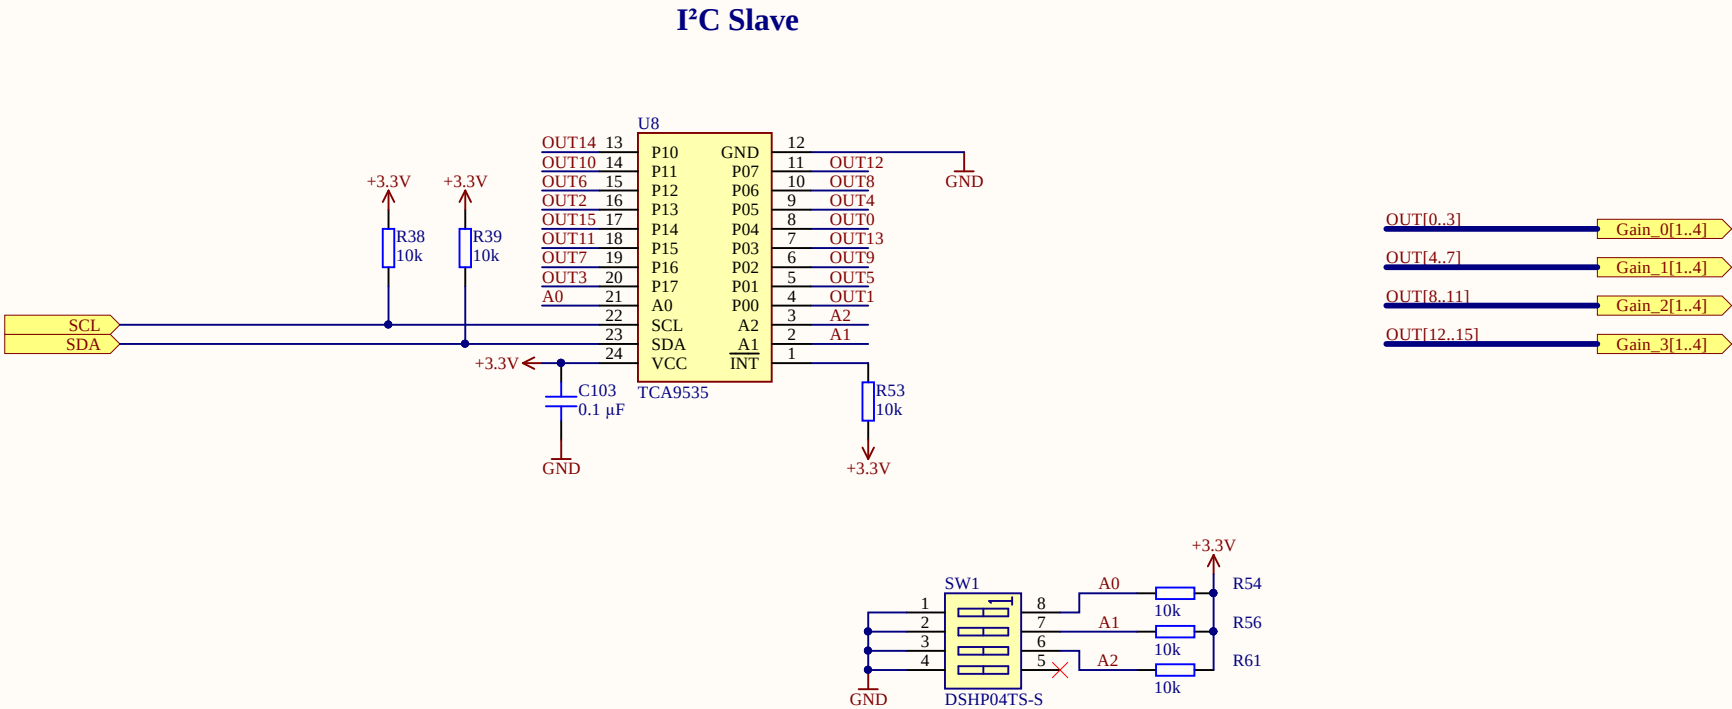

Title I2C.SchDoc

Revision: 1v01

Design Engineer: F. Schoenig, M. Gremer

Project: uz_d_iepe.PrjPCB


UltraZohm

www.ultrazohm.com/

Date: 02.12.2021

Sheet 9 of 19



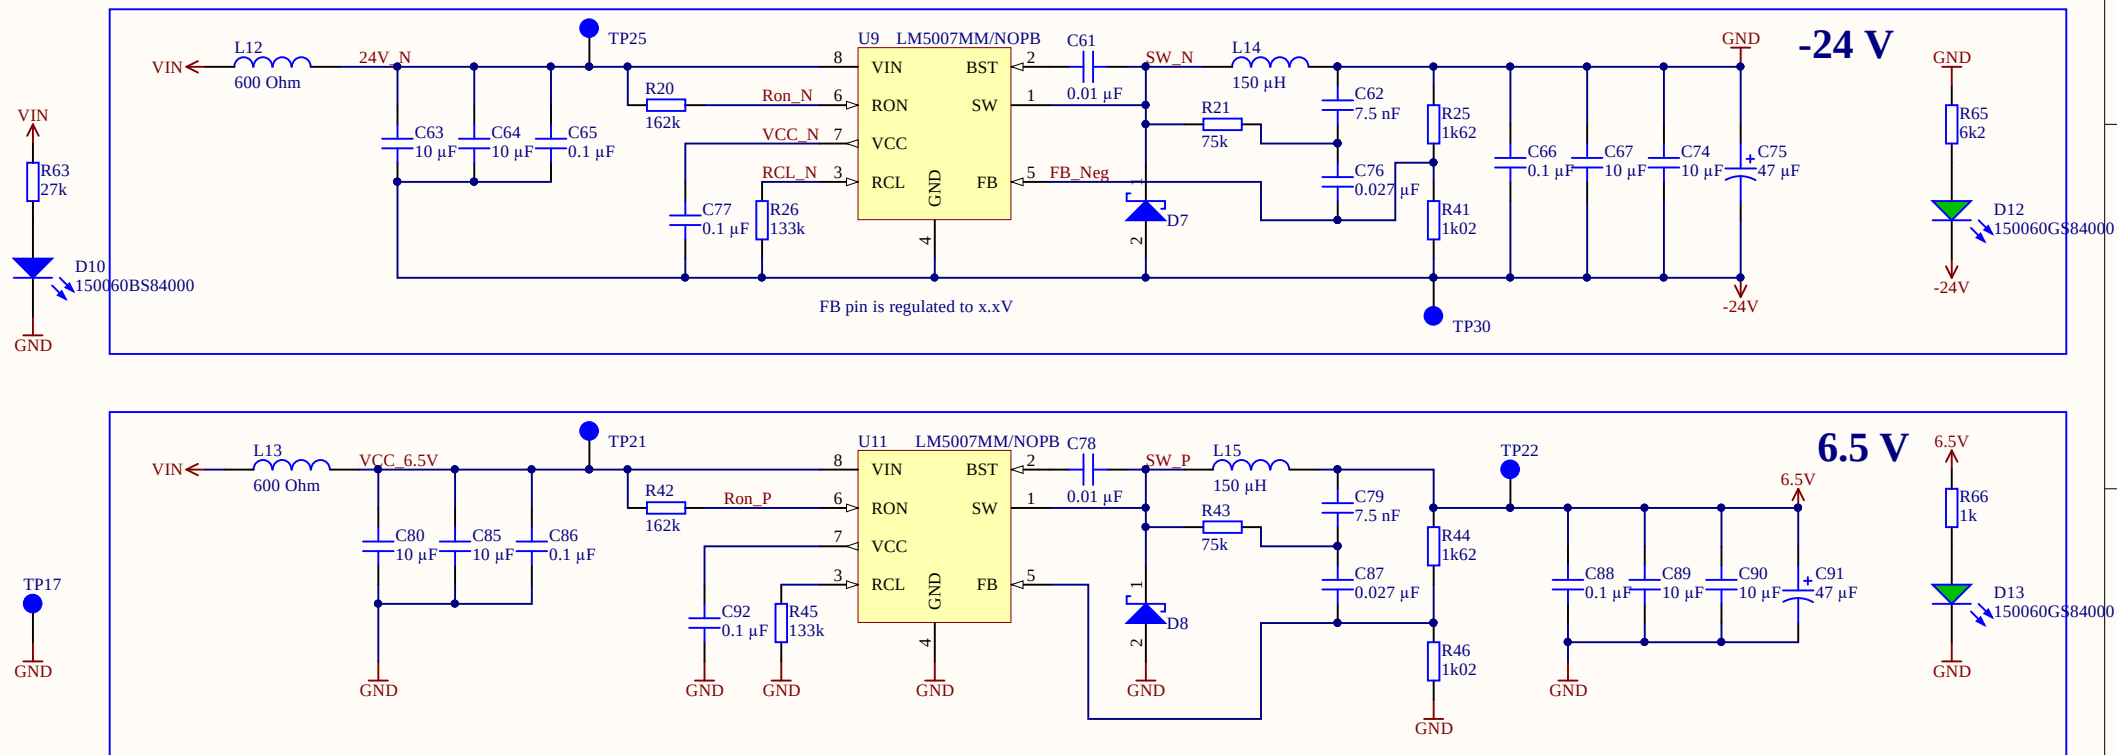

Title Power_1.SchDoc

Revision: 1v01

Design Engineer: F. Schoenig, M. Gremer

Project: uz_d_iepe.PrjPCB

UltraZohm

www.ultrazohm.com/

Date: 02.12.2021

Sheet 10 of 19

