




Low noise isolated power supply

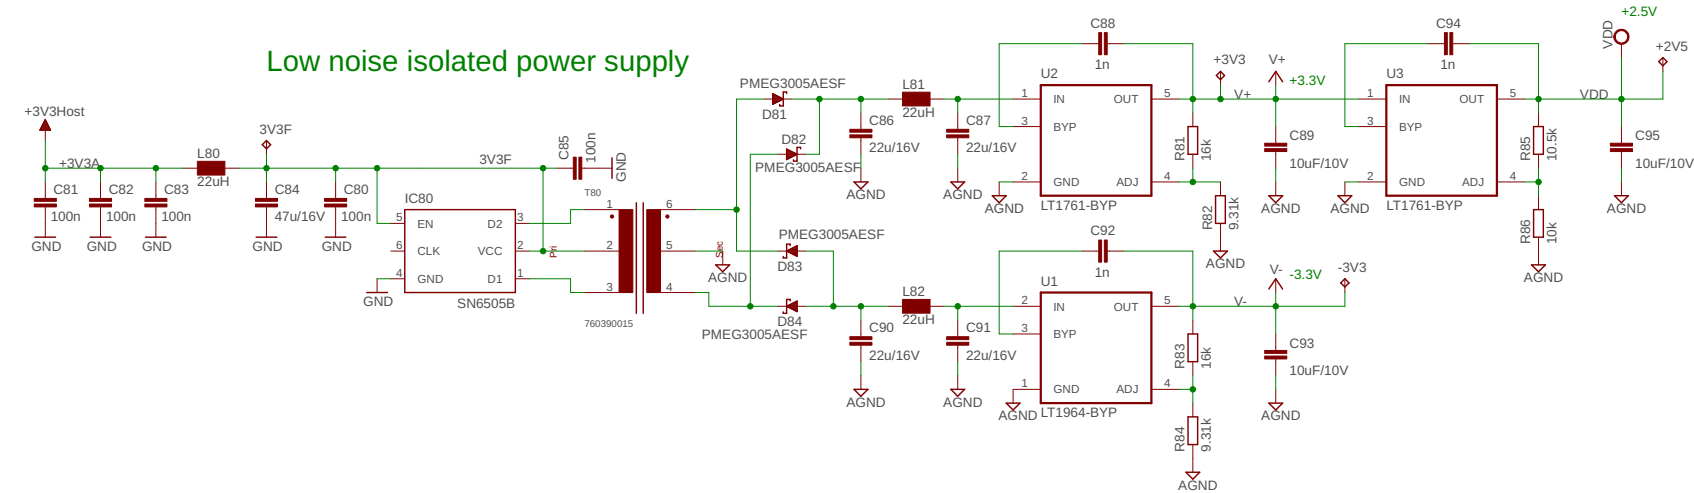


QTH symbol orientation similar to the connector placed on the bottom side

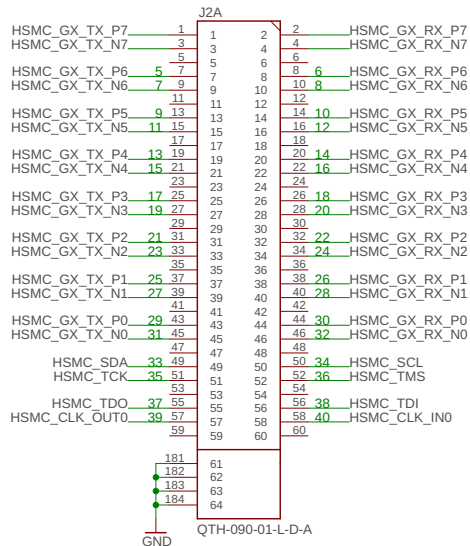

J2A: Altera HSMC numbering skips every 5th and 6th pin

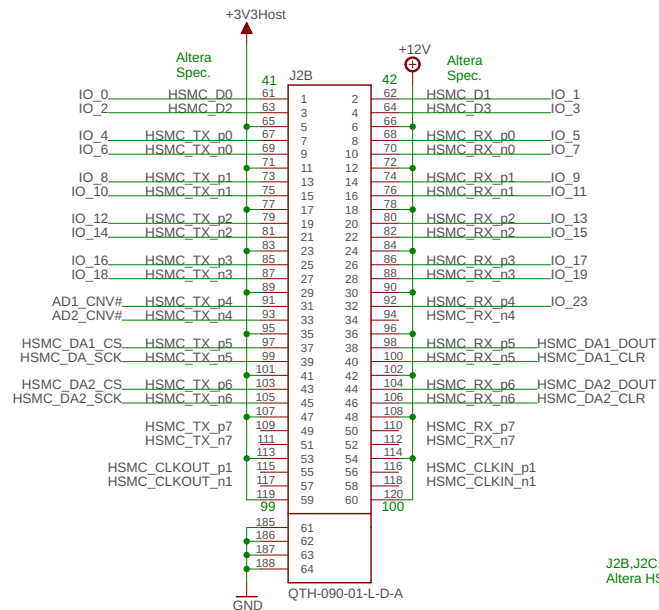

J2B,J2C: QTH pins 61-180 map to the Altera HSMC pins 41-160

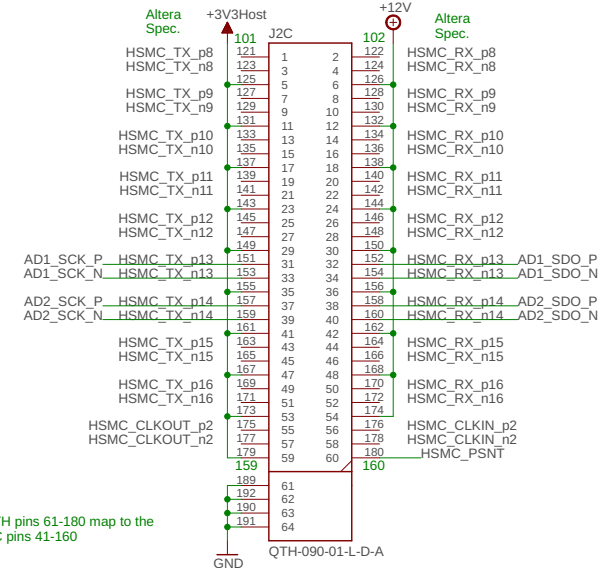

HSMC and Power Supply


TITLE: ADDA5M

Document Number: fpn16001

REV:


Date: 30.11.2016 09:04

Sheet: 1/3

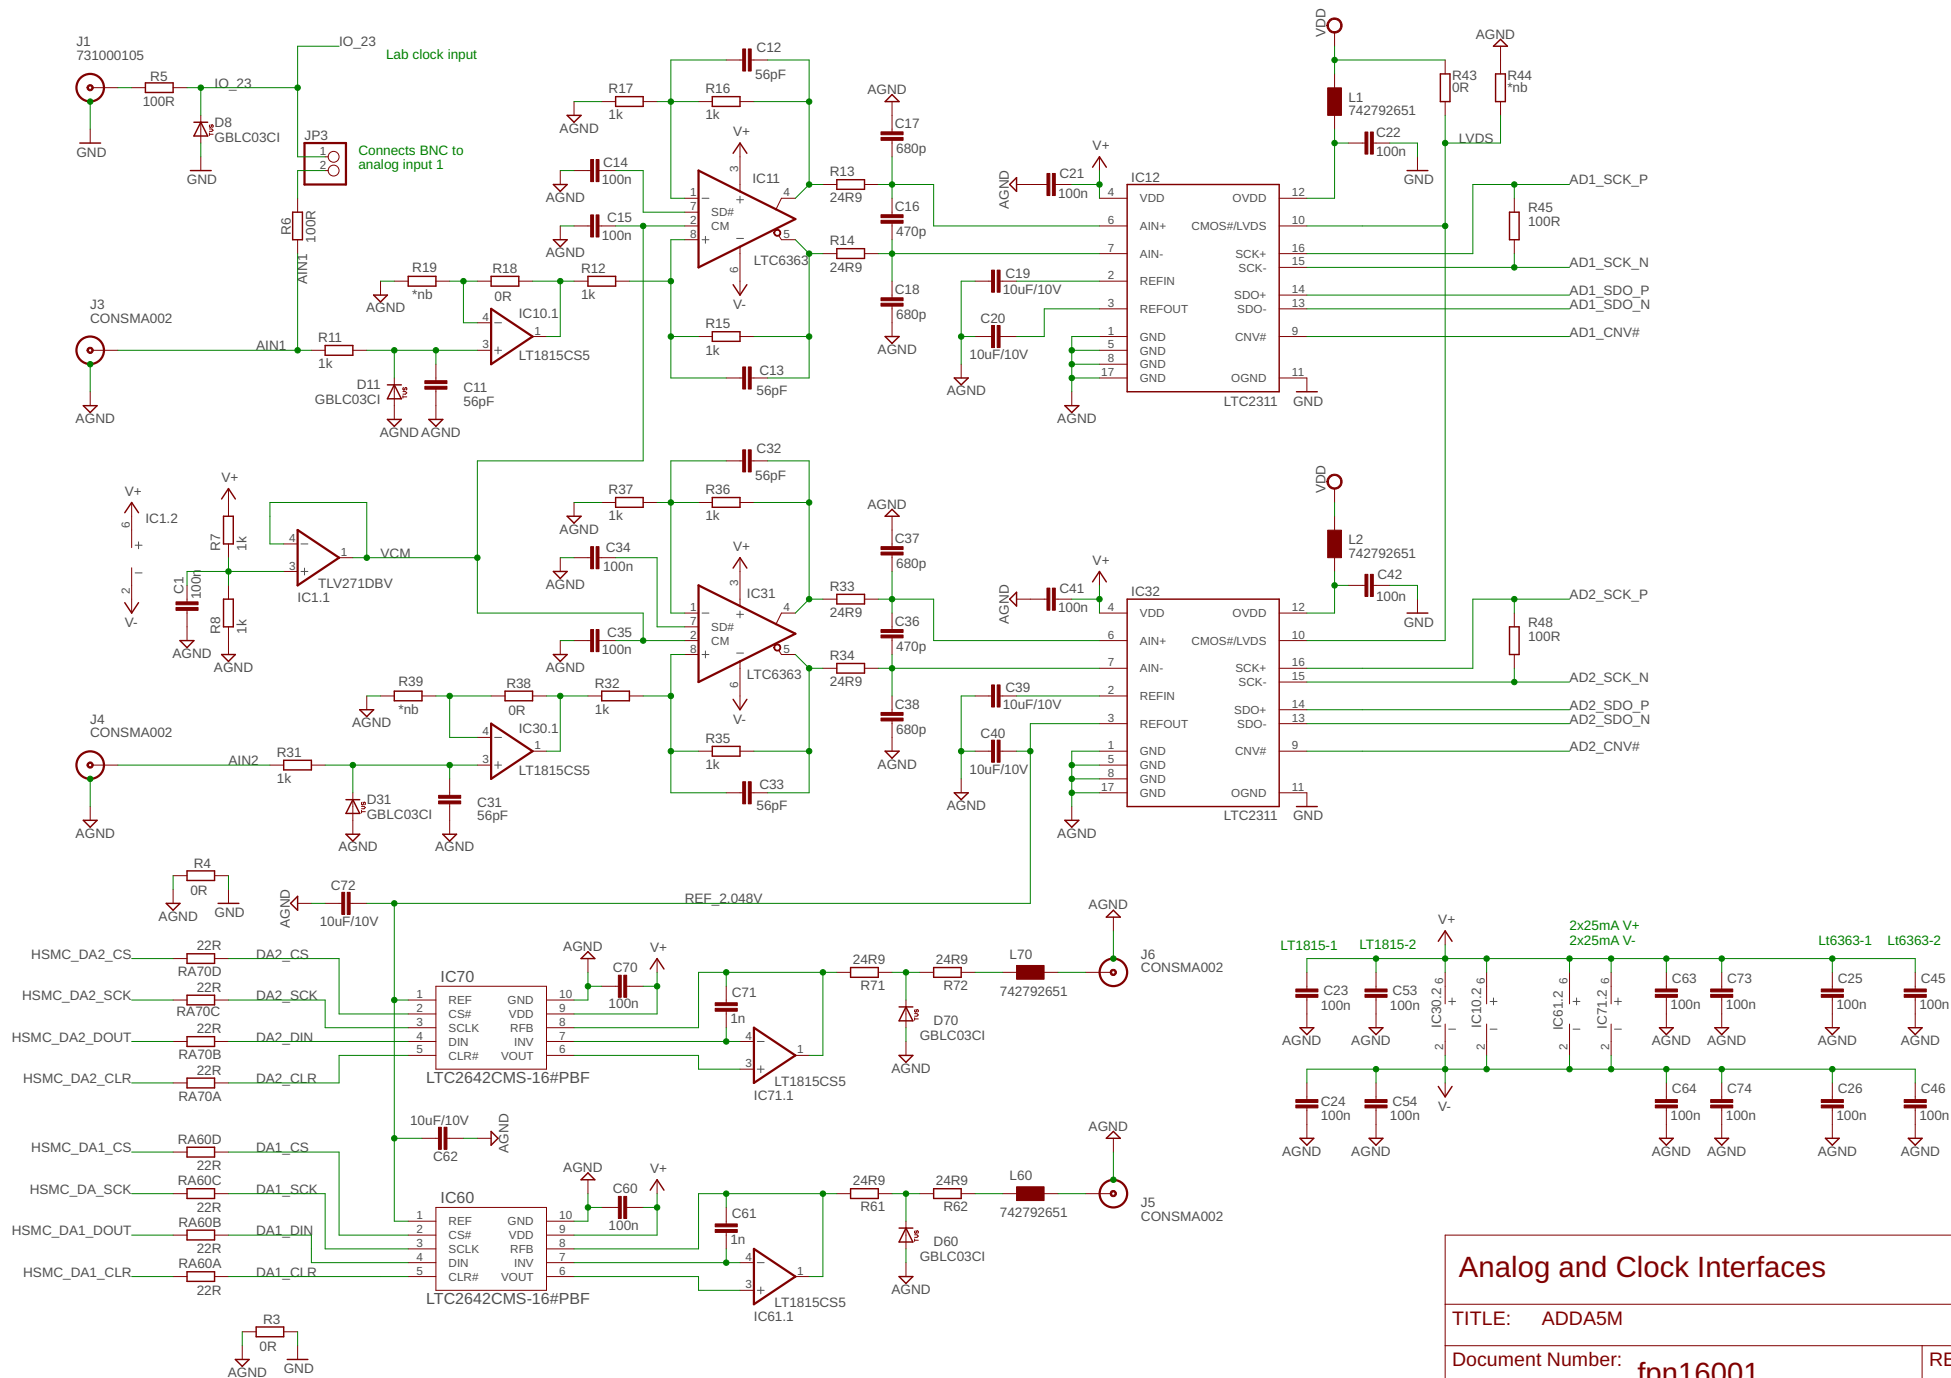


Analog and Clock Interfaces		
TITLE: ADDA5M		
Document Number: fpn16001		REV:
Date: 30.11.2016 09:04	Sheet: 2/3	






Digital Input / MSO Cable Interface

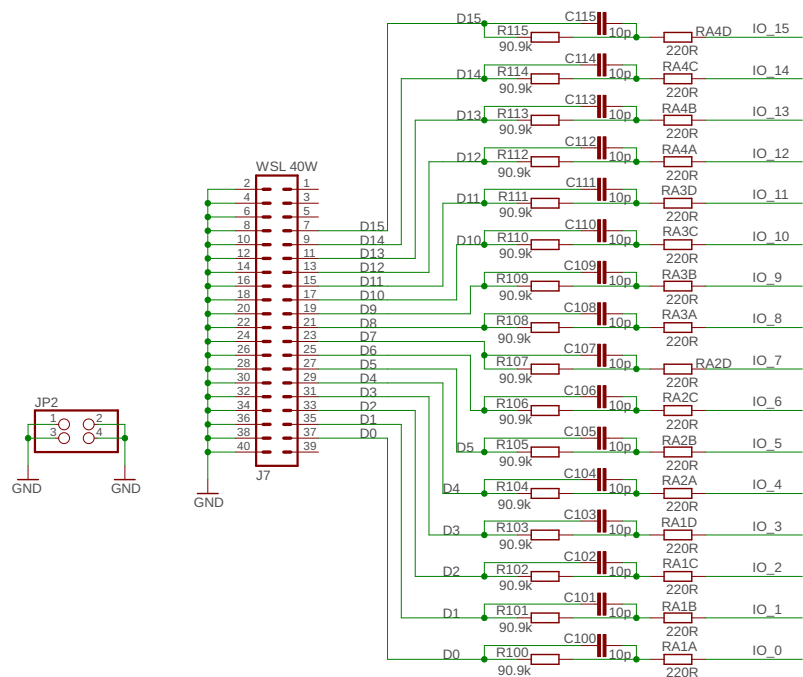


Multipurpose pin header



LED output



I2C calibration memory

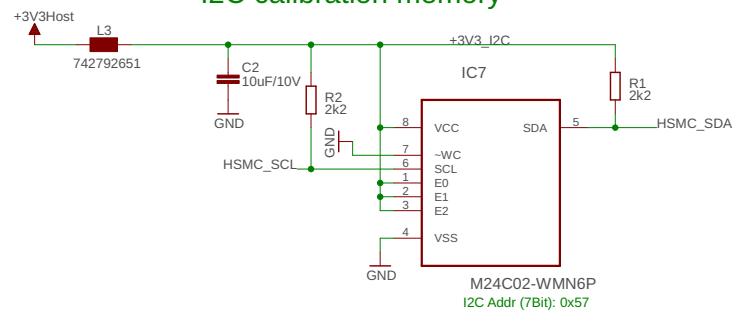

Digital Interfaces and Memory

TITLE: ADDA5M

Document Number: fpn16001

REV:

Date: 30.11.2016 09:04

Sheet: 3/3