


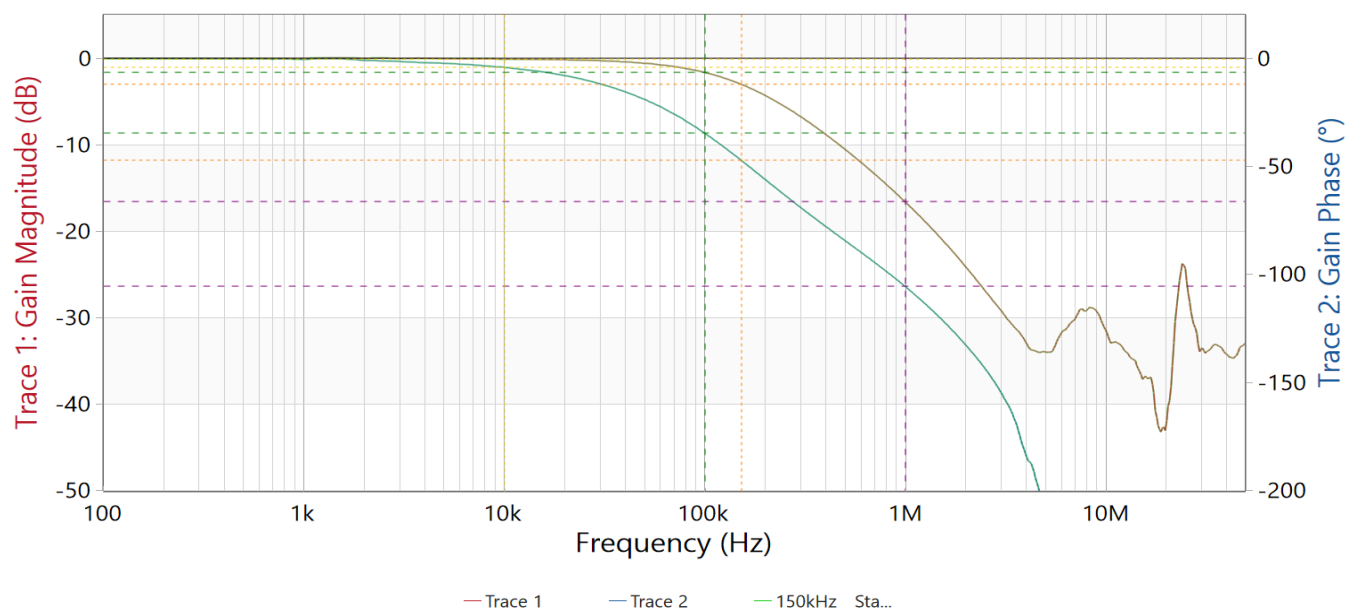

	10kHz	100kHz	-3dB
Frequency	10 kHz	100 kHz	152,169 kHz
Trace 1	Magnitude (dB)	Magnitude (dB)	Magnitude (dB)
Measurement	-104,986 mdB	-1,632 dB	-3 dB
Trace 2	Phase (°)	Phase (°)	Phase (°)
Measurement	-4,184 °	-34,582 °	-47,158 °

	1MHz		
Frequency	1 MHz		
Trace 1	Magnitude (dB)		
Measurement	-16,572 dB		
Trace 2	Phase (°)		
Measurement	-105,458 °		

Sweep	
Start frequency:	100 Hz
Stop frequency:	50 MHz
Center frequency:	25 MHz
Span:	50 MHz
Sweep mode:	Logarithmic
Numer of points:	801

Hardware setup	
Device type:	Bode100R2
Serial number:	PG276H
Receiver bandwidth:	300 Hz
Output level:	7 dBm
DUT settling time:	1 ms

Calibration	Full-Range	User-Range
Gain	Active	-

Termination	Channel 1	Channel 2
Gain	1 MΩ	1 MΩ

Attenuator setting	Channel 1	Channel 2
Transmission	0 dB	20 dB

Probe factor	Channel 1	Channel 2
Gain	10: 1	1: 1