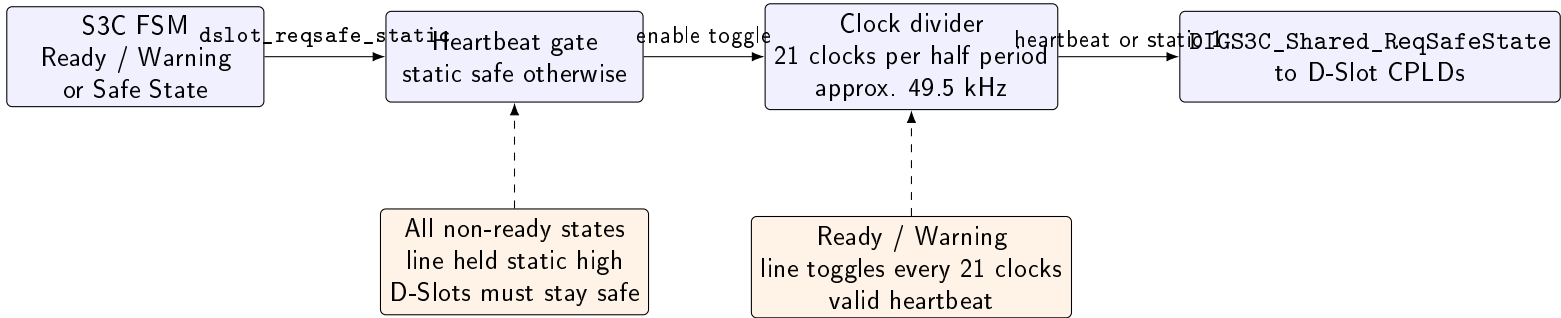


The sender never relies on a static low level to release D-Slot outputs. Only Ready and Warning produce a continuous heartbeat. Any stop, power-down, boot, or error state holds the line static, which makes the D-Slot receiver time out into safe state.