

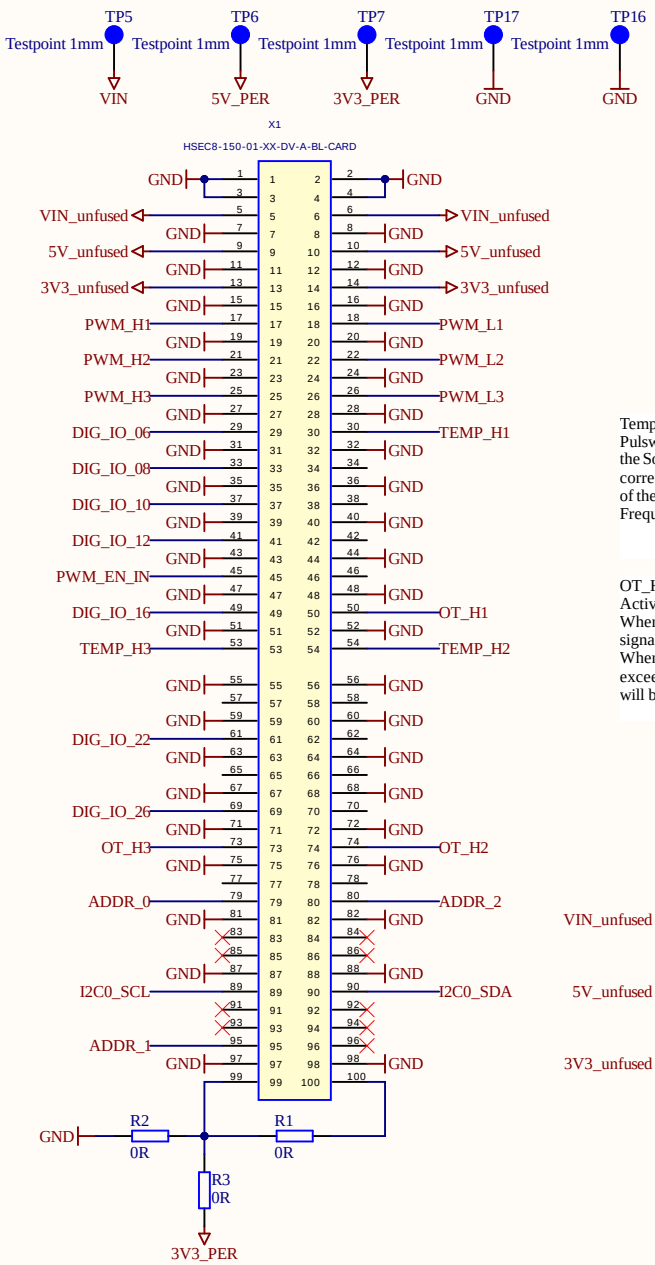



Temp_H/L signals:
Pulswidth modulated signal to the SoC. Pulswidth linear correlated to the temperature of the Mosfets
Frequency 11kHz

OT_H/L signals:
Active low signal.
When in normal operation, signal is 3V3.
When the measured temp exceeds 105°C, the OT signal will be set to LOW.







Inverting Schmitt Trigger

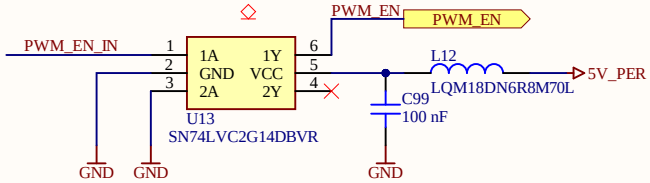

Status LEDs for UZ-supply rails

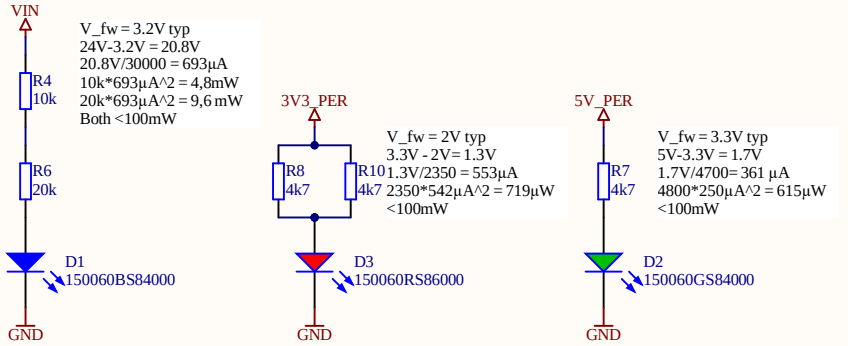

EEPROM

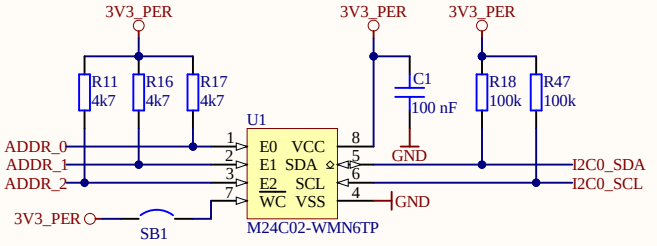

Note: place solder bump to protect EEPROM memory from write access.

Title DigitalCarrierJack.SchDoc		UltraZohm www.ultrazohm.com
Revision: Rev04	Design Engineer: K.Patel / D. Hufnagel	Date: 1/3/2025
Project: UZ_D_Inverter.PrjPCB		Sheet 2 of 9