



Top, no variant

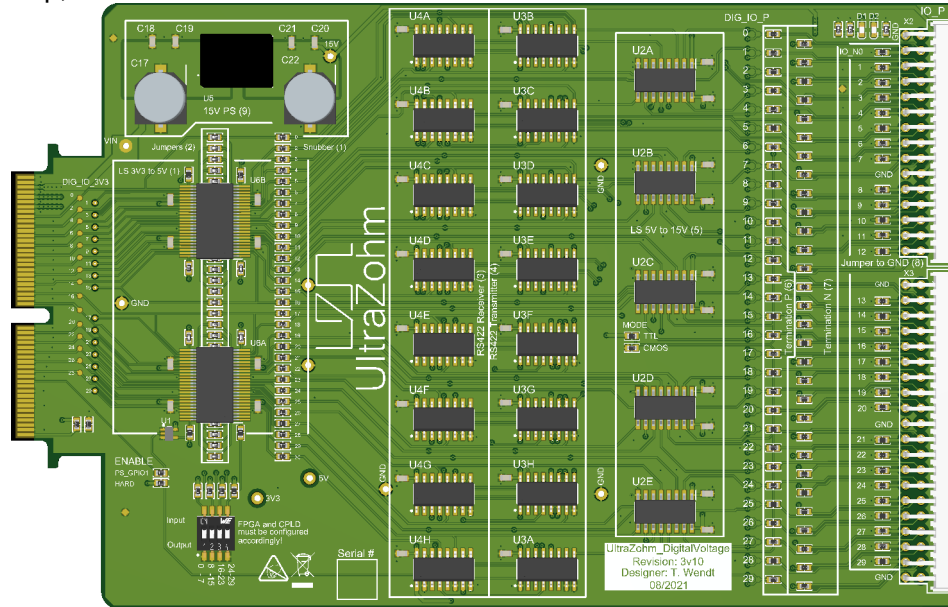


Bottom

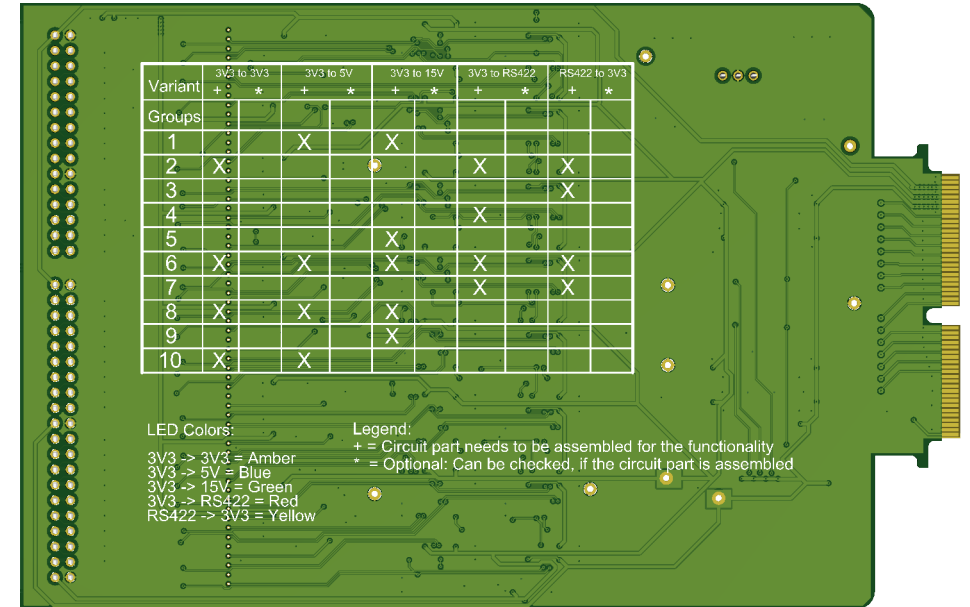

Variant	3V3 to 3V3	3V3 to 5V	3V3 to 15V	3V3 to RS422	RS422 to 3V3
Groups	+	+	+	+	+
1		X	X		
2	X			X	X
3					X
4				X	
5			X		
6	X	X	X	X	X
7				X	X
8	X	X	X		
9			X		
10	X	X			

LED Colors:
 3V3 -> 3V3 = Amber
 3V3 -> 5V = Blue
 3V3 -> 15V = Green
 3V3 -> RS422 = Red
 RS422 -> 3V3 = Yellow

Legend:
 + = Circuit part needs to be assembled for the functionality
 * = Optional: Can be checked, if the circuit part is assembled

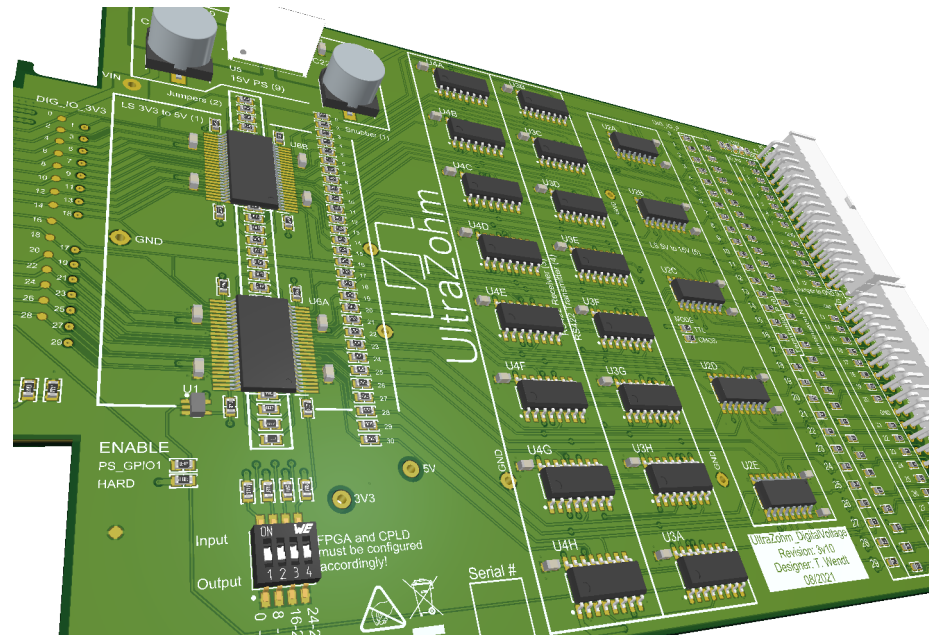

View from Top side (Scale 3:2)

ultrazohm

Serial

Project
Revision
Designer

Date

100,00

160,98

155,99

141,11

A


B

C

D

E

View from Front side (Scale 3:2)

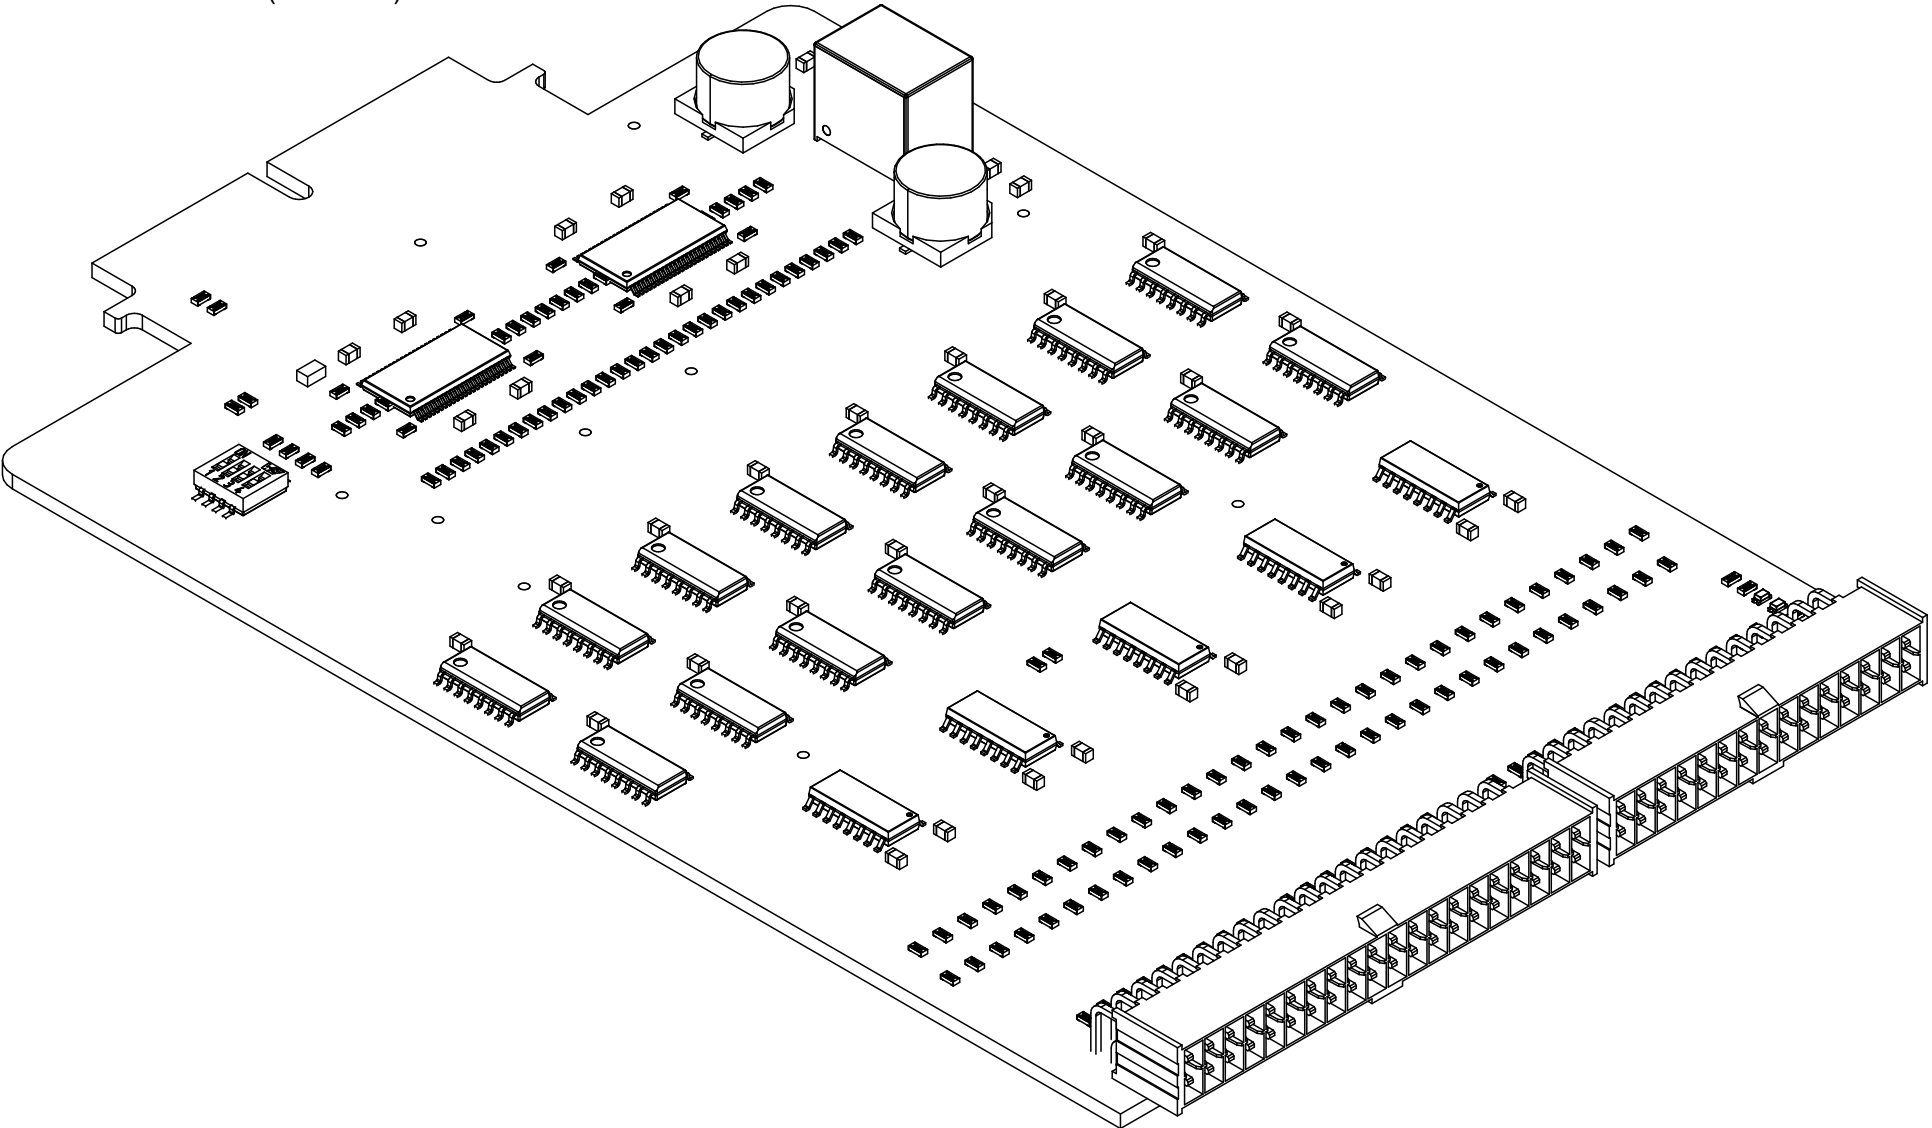

A

B

C

D

E

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.01mm	Solder Resist	Solder Mask	GTS
Copper	Top Layer	0.04mm		Signal	GTL
Prepreg		0.10mm	FR-4	Dielectric	
Copper	GND_top	0.02mm		Signal	G1
Core		1.26mm	Core-036	Dielectric	
Copper	GND_bot	0.02mm		Signal	G2
Prepreg		0.10mm	FR-4	Dielectric	
Copper	Bottom Layer	0.04mm		Signal	GBL
Surface Material	Bottom Solder	0.01mm	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO
Total thickness: 1.59mm					

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
◇	618	0.30mm	Plated	
□	80	1.02mm	Plated	
○	3	1.05mm	Plated	
	701 Total			