




ADCs 1-5 and 8-10 are used

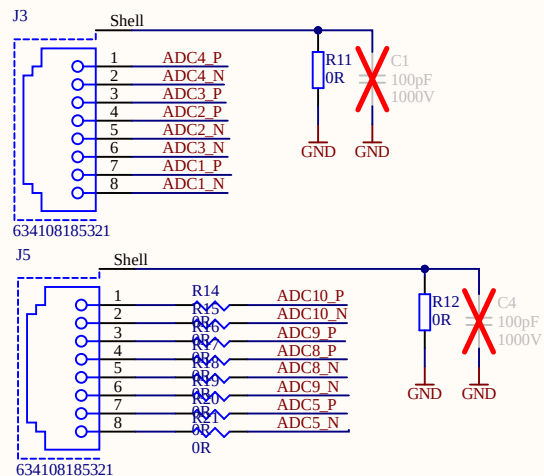



OnSemi Output Range = 0 to 3.3V to GND
The signals are not fully differential but referenced to GND

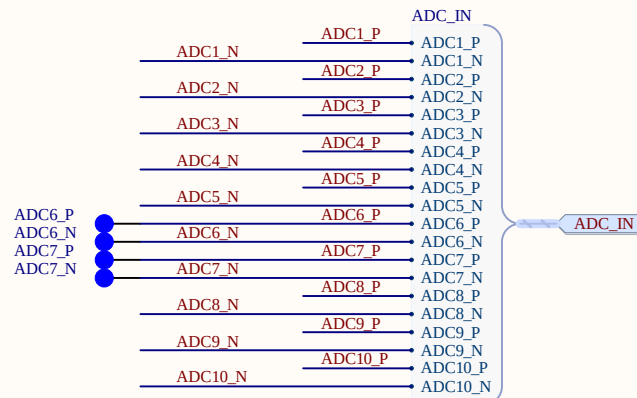

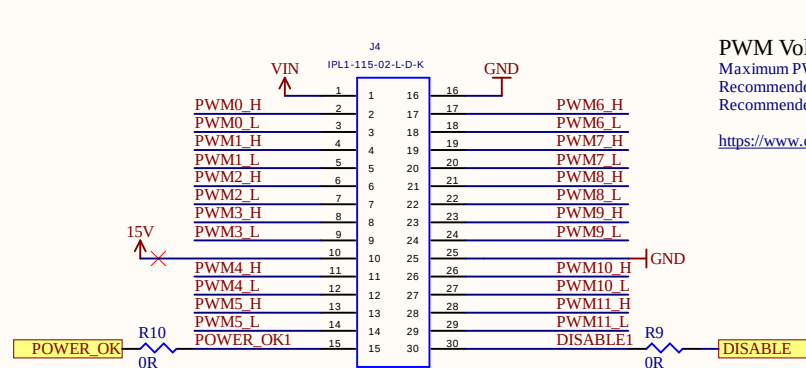

PWM Voltage Levels for NFAQ1060L36T Driver IC
 Maximum PWM Input Voltage = VDD = 15V
 Recommended PWM Input Voltage ON Voltage min = 3V max = 5V
 Recommended PWM Input Voltage OFF Voltage min = 0V max = 0.3V

<https://www.onsemi.com/pub/Collateral/NFAQ1060L36T-D.PDF>

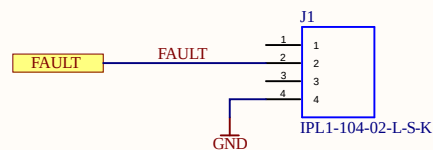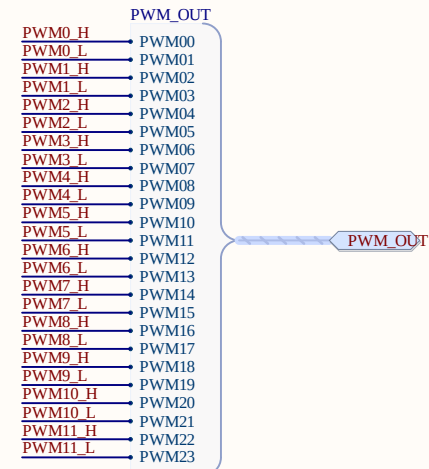

1

2

3

4

A

B

C


D

A

B

C

D

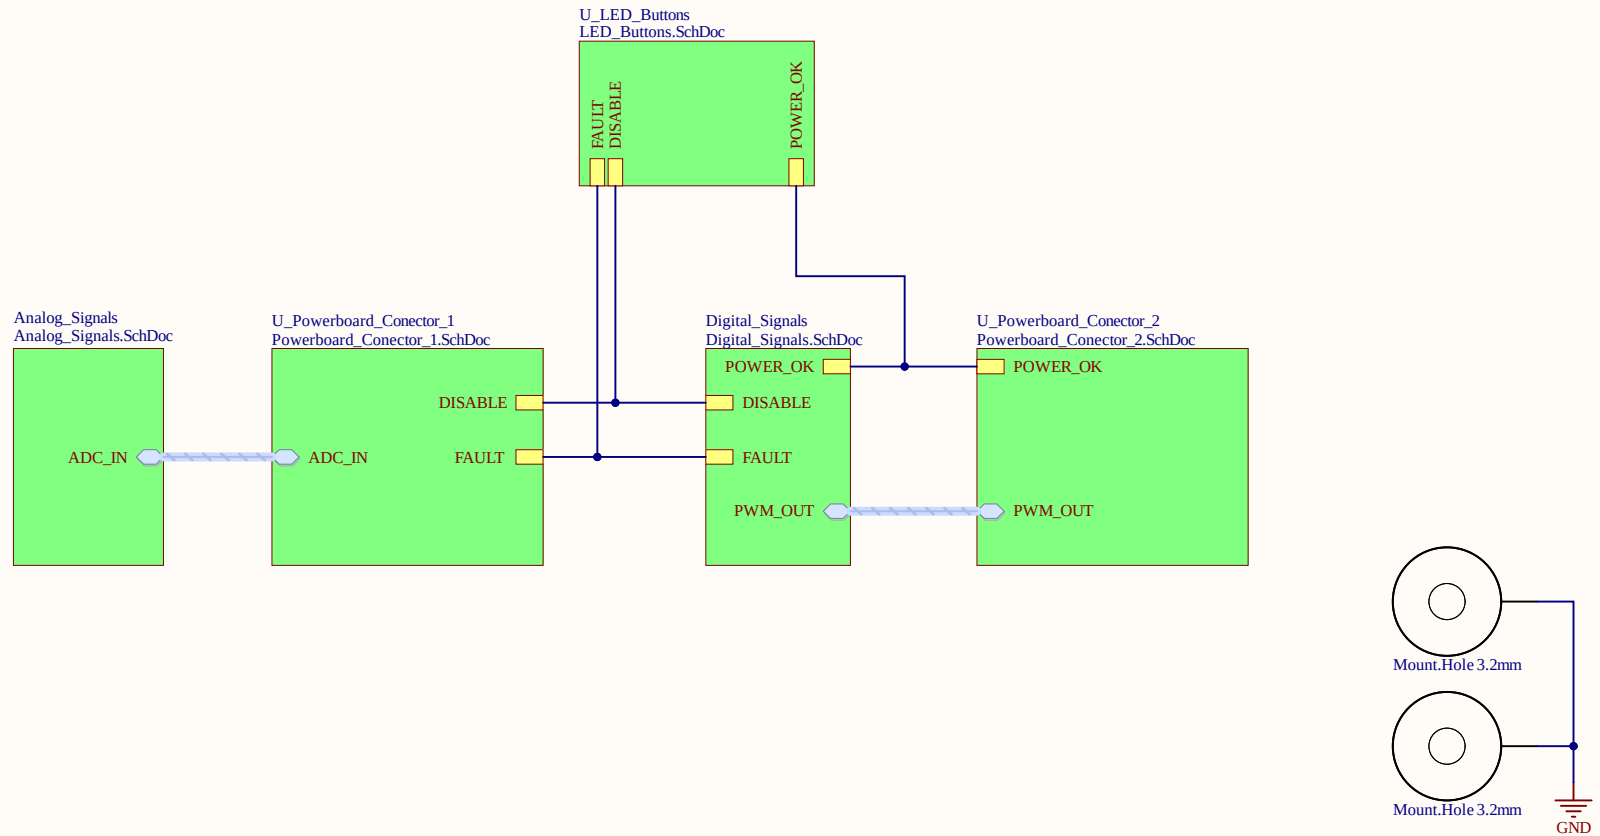

Title Interface_Board_Top.SchDoc	
Revision: 1	Design Engineer: Eugen Romaschenko
Project: MDK_UltraZohm_Adapter.PrjPcb	

UltraZohm
www.ultrazohm.com
Date: 08.02.2021
Sheet of




1



2

3

4

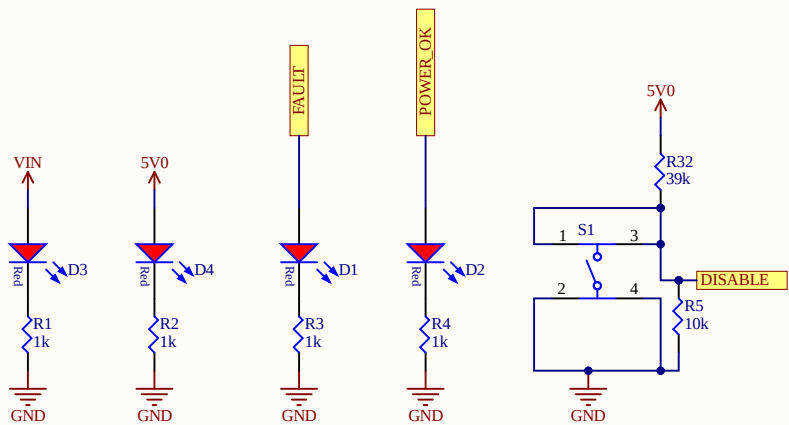

Resistor values need to be changed

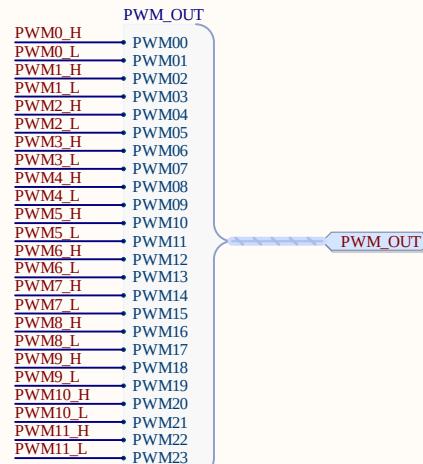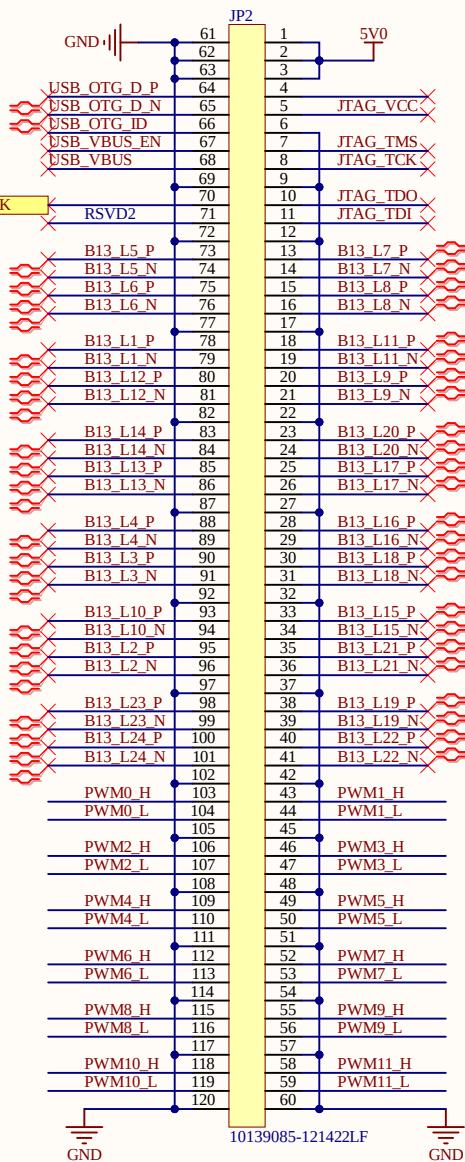

PWM Voltage Levels for NFAQ1060L36T Driver IC

Maximum PWM Input Voltage = VDD = 15V
 Recommended PWM Input Voltage ON Voltage min = 3V max = 5V
 Recommended PWM Input Voltage OFF Voltage min = 0V max = 0.3V

<https://www.onsemi.com/pub/Collateral/NFAQ1060L36T-D.PDF>

Title Powerboard_Conector_2.SchDoc	
Revision: 1	Design Engineer: Eugen Romaschenko
Project: MDK_UltraZohm_Adapter.PrjPcb	

UltraZohm	
www.ultrazohm.com	
Date: 08.02.2021	
Sheet of	



Designator	Comment	Publisher	Part Number	Description	Footprint	Quantity
D1, D2, D3, D4	150060RS75000			WL-SMCW SMD Mono-color Chip LED Waterclear, size 0603, Red, 2 V, 140°	WL-SMCW_0603	4
J1	IPL1-104-02-L-S-K				IPL1-104-02-L-S-K	1
J3, J5	634108185321			WR-MJ Modular Jack SMT Vertical Shielded with Solder Tab 8P8C Top Entry	634108185321	2
J4	IPL1-115-02-L-D-K			Terminal Assembly, Double Row, Right Angle, Thru-Hole, 0.100" x 0.100" Pitch, 30 Pins.	IPL1-115-02-L-D-K	1
JP1, JP2	10139085-121422LF	Amphenol ICC	10139085-121422LF	Bergstack+ 0.8mm pitch - 120pin B2B connector	10139085-121422LF	2
R1, R2, R3, R4	1k	Generic	Generic 1% tol.	RES SMD	RESC0603	4
R5	10k	Generic	Generic 1% tol.	RES SMD	RESC0603	1
R9, R10, R14, R15, R16, R17, R18, R19, R20, R21	0R	Generic	Generic 1% tol.	RES SMD	RESC0603	10
R11, R12, R22	0R				RESC1608X06N	3
R32	39k	Generic	Generic 1% tol.	RES SMD	RESC0603	1
S1	434153017835	Wurth Elektronik	434153017835	WS-TASV J-Bend SMT Tact Switch 3.5x2.9mm, height 1.7mm, 350gf	434153017835	1