


TopSheet Adapter-Platine




Serial1
Serial
Serialnumber 6.3 x 6.3 mm

INFO1
Project
ProjectRevision
AuthorParam
ProjectDate
Design Information

Power Supply
Power_Supply_Currentsensors

Power Supply
Power_Supply_AMP

Mounting Holes

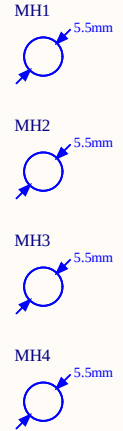

D-SUB Eingang 1

LEM IN 100-S Stromsensor

D-SUB Eingang 2


LEM IN 100-S Stromsensor

D-SUB Eingang 3


D-SUB Eingang 4

uz_ext_voltage_measurement_800v

DSub OUTPUT -> PIN 1 (P) & 6 (N)

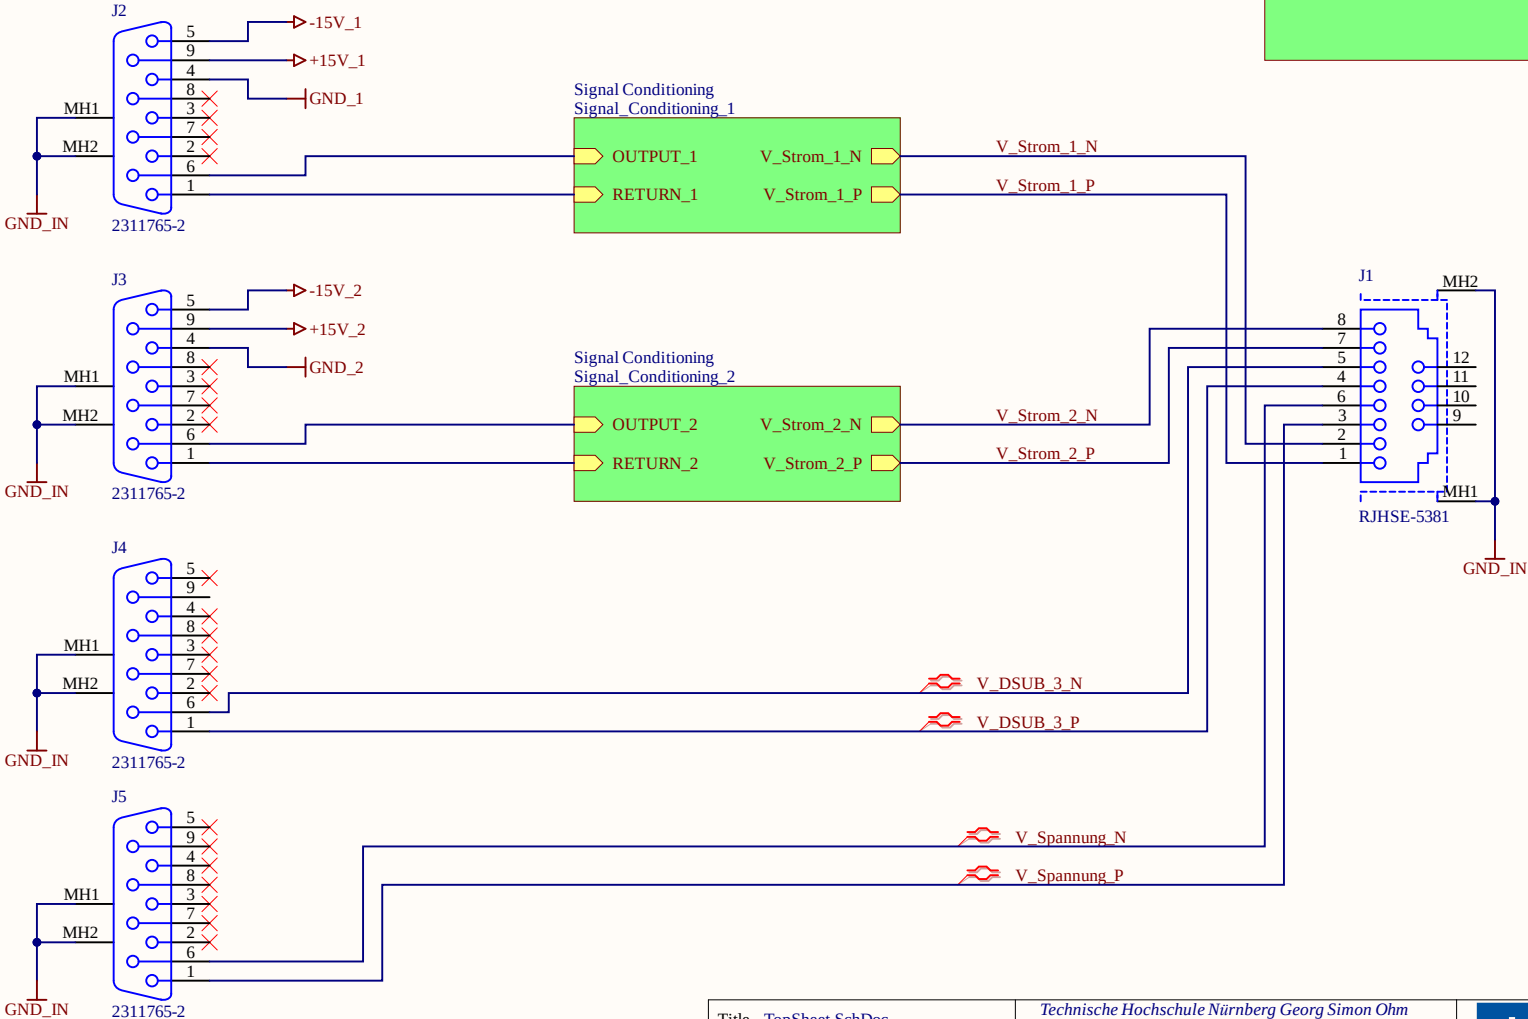



Power Supply Currentsensors

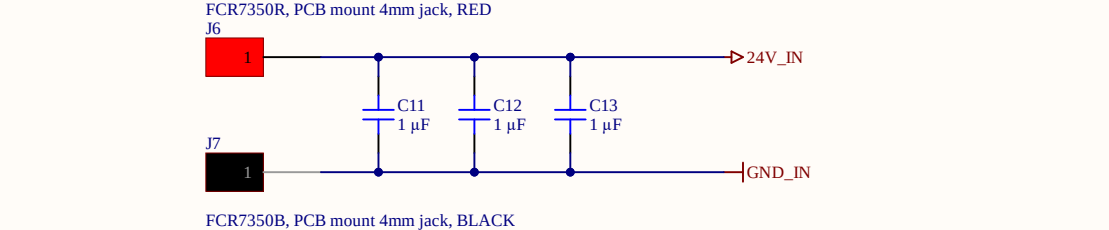

LEM IN 100-S


Spannungsversorgung: +/- 15 V
DC Nennstromaufnahme @15V 320 mA
R_m = 20 Ohms
Secondary nominal RMS current (@100A) = 0,2 A
Shielded output cable & shielded plug are recommended to use

Power Consumption (pro Stromsensor):
P = U*I = 15 V * 0,230 A = 4,8 W

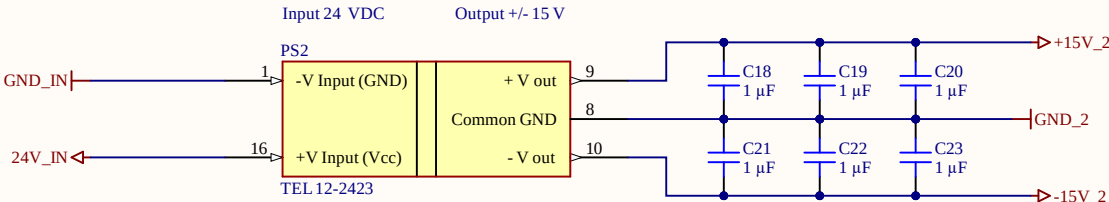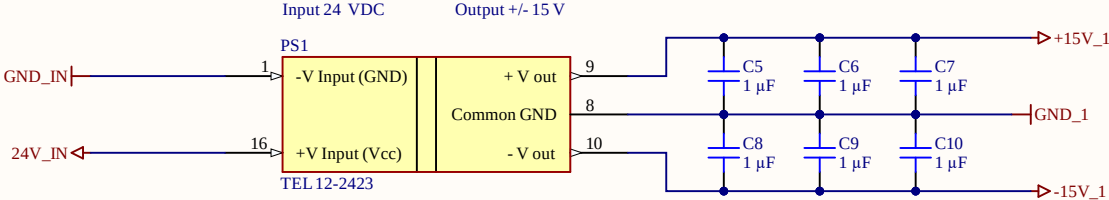


Power Supply Amplification Circuit

Verbraucher IC1:
Voltage: 5,0 V
Current: 1,25 mA
Power: 0,00625 mW
Verbraucher IC2:
Voltage: 5,0 V
Current: 1,25 mA
Power: 0,00625 mW
--> PS Supply min 0,1 W

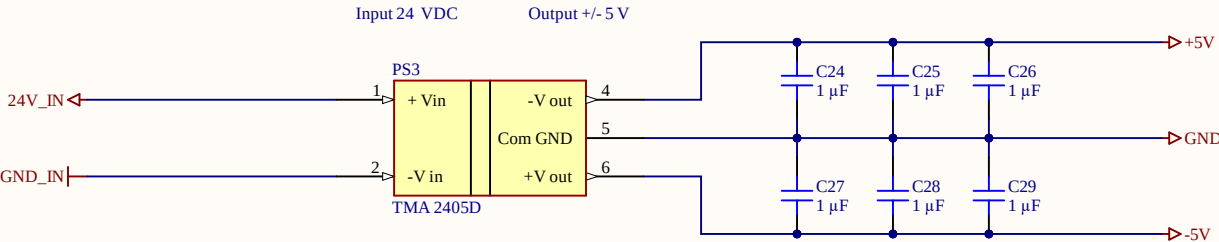

Connection

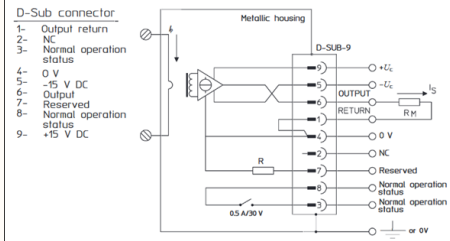


Signal Conditioning 1

Input: LEM IN 100-S Stromwandler:

Verstärkerschaltung Gain = 2

$$G = R_F / R_G = R_1 / R_2 = 2k / 1k = 2$$

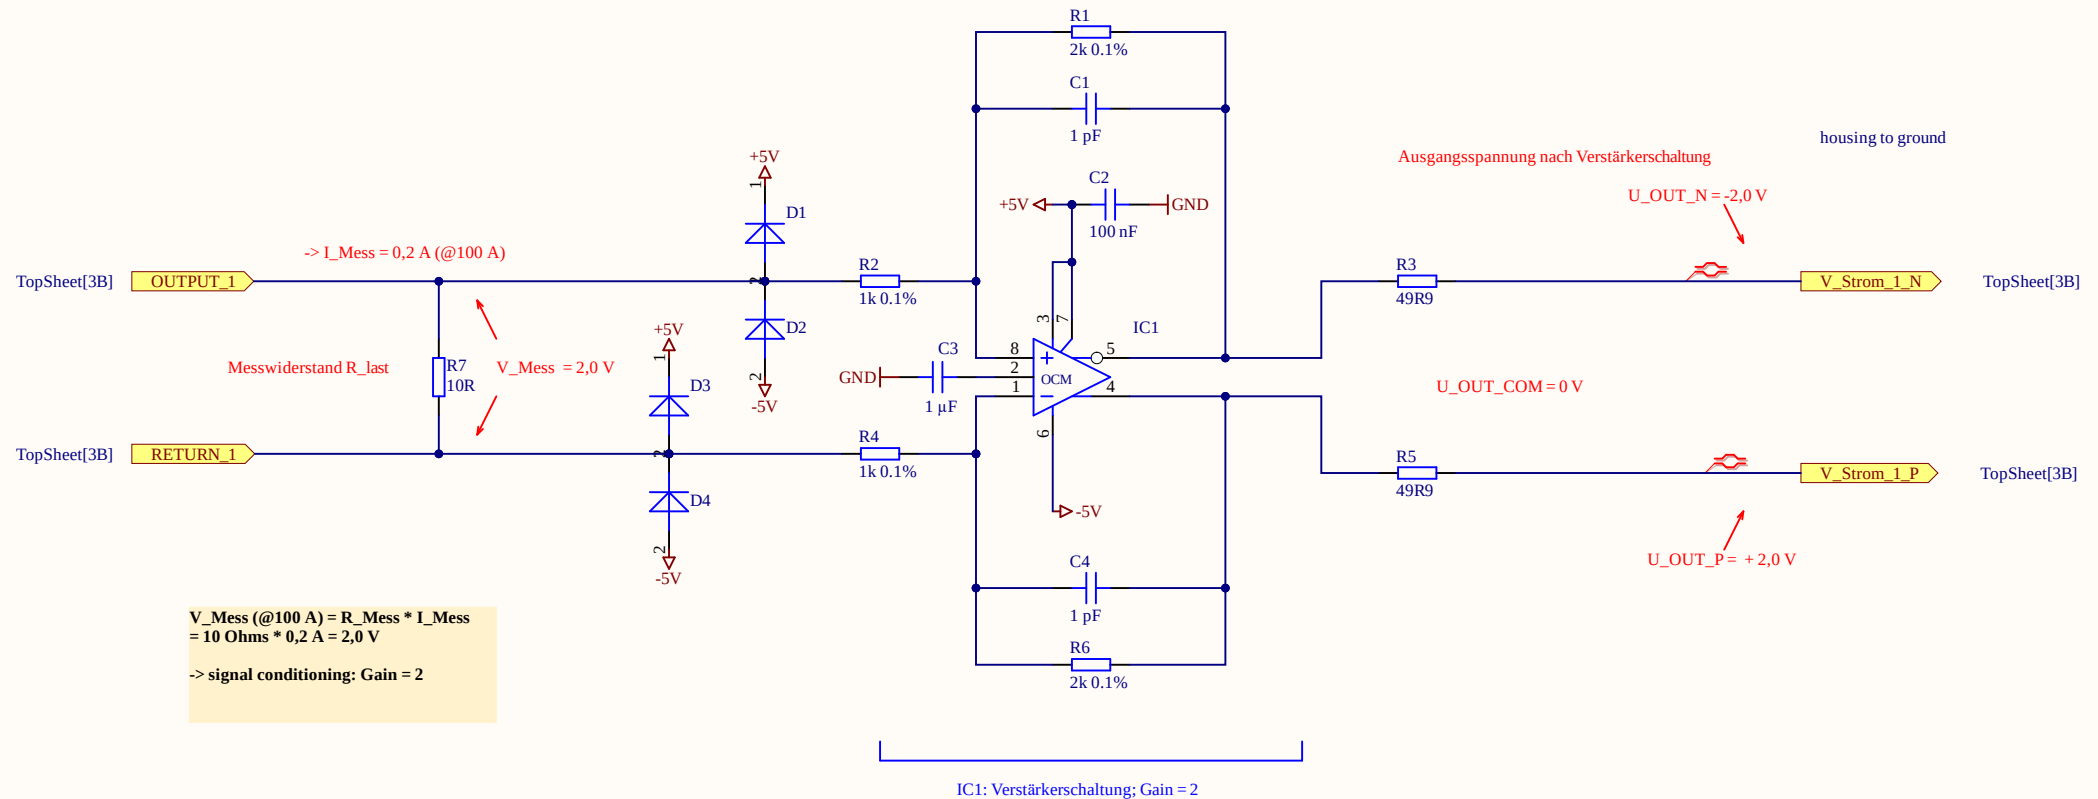**LEM IN 100-S**

Spannungsversorgung: +/- 15 V

DC Nennstromaufnahmen @15V 320 mA

R_m = 20 Ohms

Secondary nominal RMS current (@100A) = 0,2 A

Shielded output cable & shielded plug are recommended to use

Signal Conditioning 2

Verstärkerschaltung Gain = 2
 $G = R_F / R_G = R_1 / R_2 = 2k / 1k = 2$

