


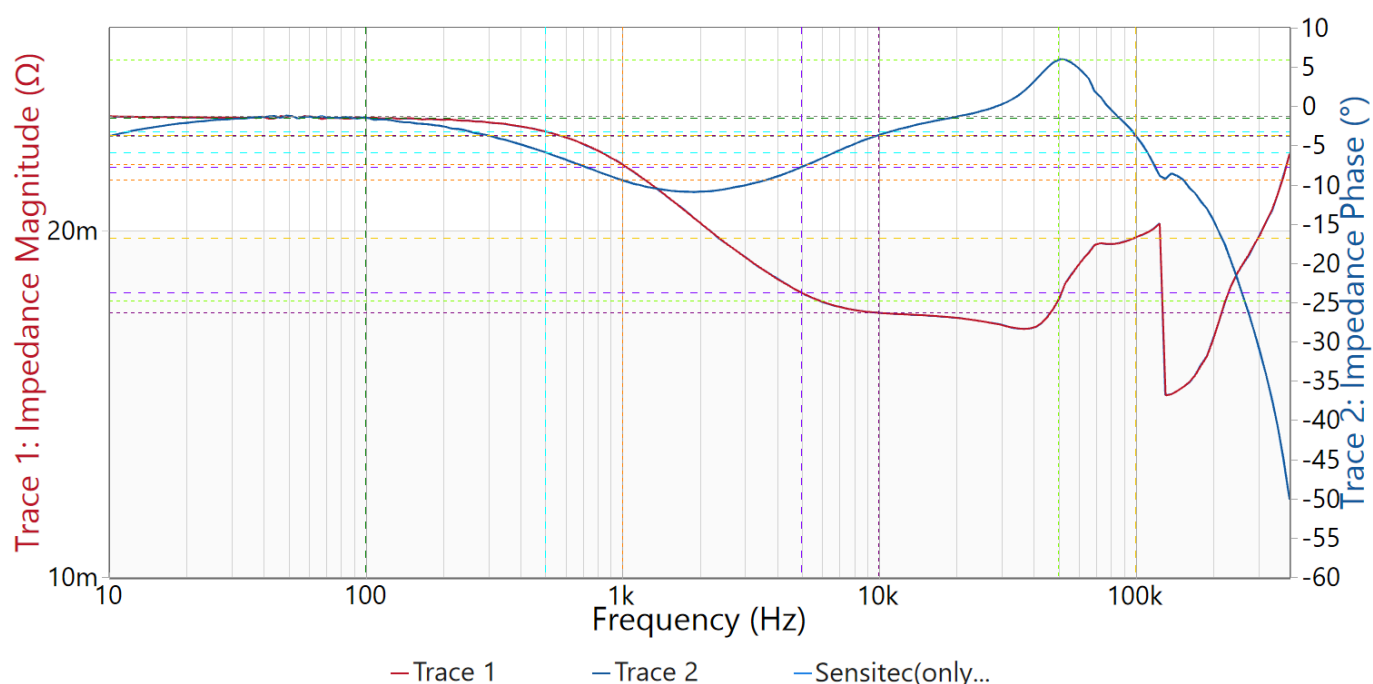

	Cursor 8	Cursor 1	Cursor 5	Cursor 2
Frequency	10 Hz	100 Hz	500 Hz	1 kHz
Trace 1 Magnitude	25,14 mΩ	25,045 mΩ	24,382 mΩ	22,83 mΩ
Trace 2 Phase (°)	-3,811 °	-1,486 °	-5,86 °	-9,405 °

	Cursor 6	Cursor 3	Cursor 7	Cursor 4
Frequency	5 kHz	10 kHz	50 kHz	100 kHz
Trace 1 Magnitude	17,661 mΩ	16,962 mΩ	17,379 mΩ	19,712 mΩ
Trace 2 Phase (°)	-7,764 °	-3,683 °	5,897 °	-3,669 °

Hardware configuration	
Receiver bandwidth	300 Hz
Source level	13 dBm
DUT settling time	0 s
Sweep time	12,67 s

Termination	Channel 1	Channel 2
Impedance	1 MΩ	1 MΩ

Receiver switch	Receiver 1	Receiver 2
Impedance/Reflection	External	External

Attenuator setting	Receiver 1	Receiver 2
Impedance/Reflection	40 dB	0 dB

Shaped level	
Level	Constant

Device configuration	
Device type	Bode100R2
Serial number	PG276H
Last internal calibration	01/16/2025 14:34:34

Sweep configuration	
Start frequency	10 Hz
Stop frequency	400 kHz
Center frequency	200,005 kHz
Span frequency	399,99 kHz
Sweep mode	Logarithmic
Number of points	201

Calibration/Correction	Full-Range	User-Range
Impedance	-	-