



3V3\_PER 3V3\_PER

R1  
2k


R2  
2k




I2C-bus slave address: 0xA2 = 0b1010 001X




I2C-bus slave address: 0xA0 = 0b1010 000X



I2C-bus slave address: 0xA4 = 0b1010 010X



I2C-bus slave address: 0xC0 = 0b1100 000X



I2C-bus slave address: 0xA6 = 0b1010 011X

LOGO1




UZ Logo

Serial1

Serial

Serialnumber 6.3 x 6.3 mm

INFO1



Design Information

Title Top\_sheet.SchDoc

Revision: Rev01

Design Engineer: Eyke Liegmann

Project: UZ\_per\_cb\_upgrade.PrjPcb


**UltraZohm**

[www.ultrazohm.com](http://www.ultrazohm.com)

Date: 27.04.2022


Sheet 1 of 7



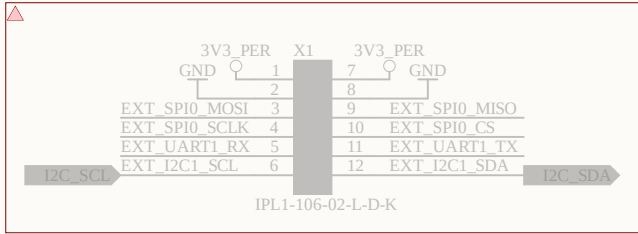

IPL1-106-01-L-D-RA-K  
mmsd-06-30-f-04.00-d-k-idx

| Table 4- Pin Mapping |       |       |
|----------------------|-------|-------|
| End Option (Double)  | END 1 | END 2 |
| -LUS                 | 01    | N/2   |
| -LDS                 | 01    | N/2+1 |
| -LUX                 | 01    | N     |
| -LDX                 | 01    | 01    |
| -MUS                 | 01    | N/2   |
| -MDS                 | 01    | N/2+1 |
| -MUX                 | 01    | N     |
| -MDX                 | 01    | 01    |




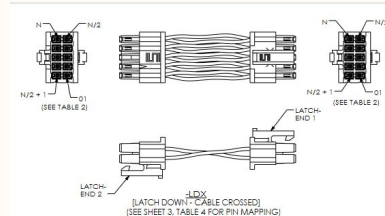


A

A



B

B

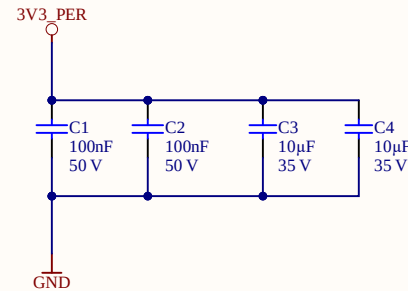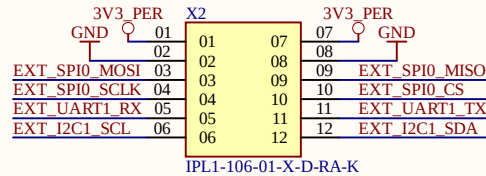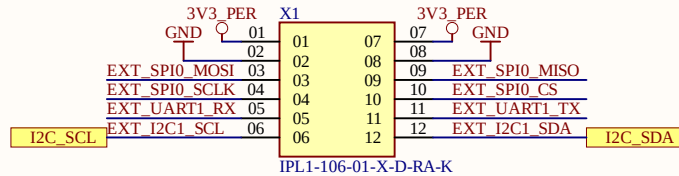

C


C

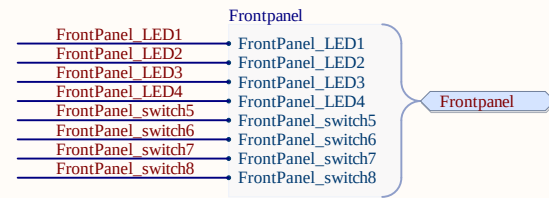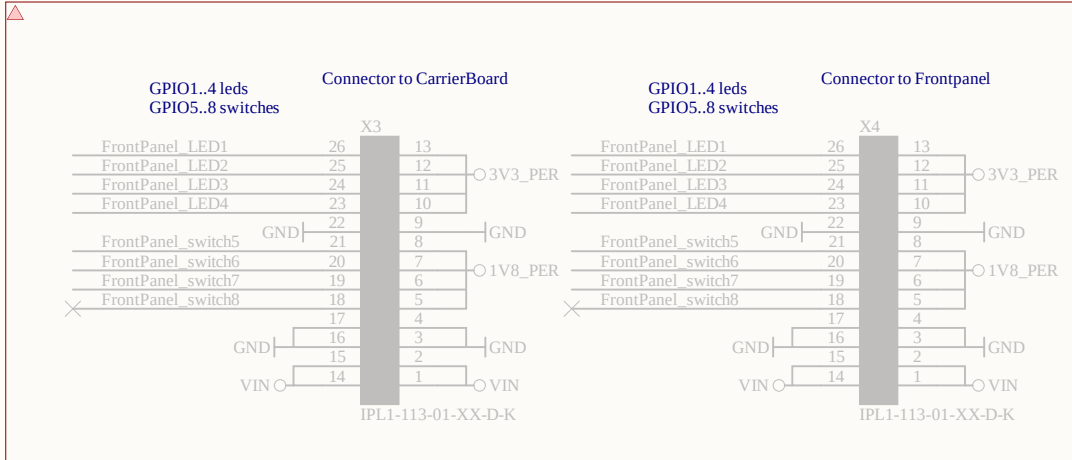

D

D

I2C-bus slave address: 0xA2 = 0b1010 001X  
read A3h and write A2h

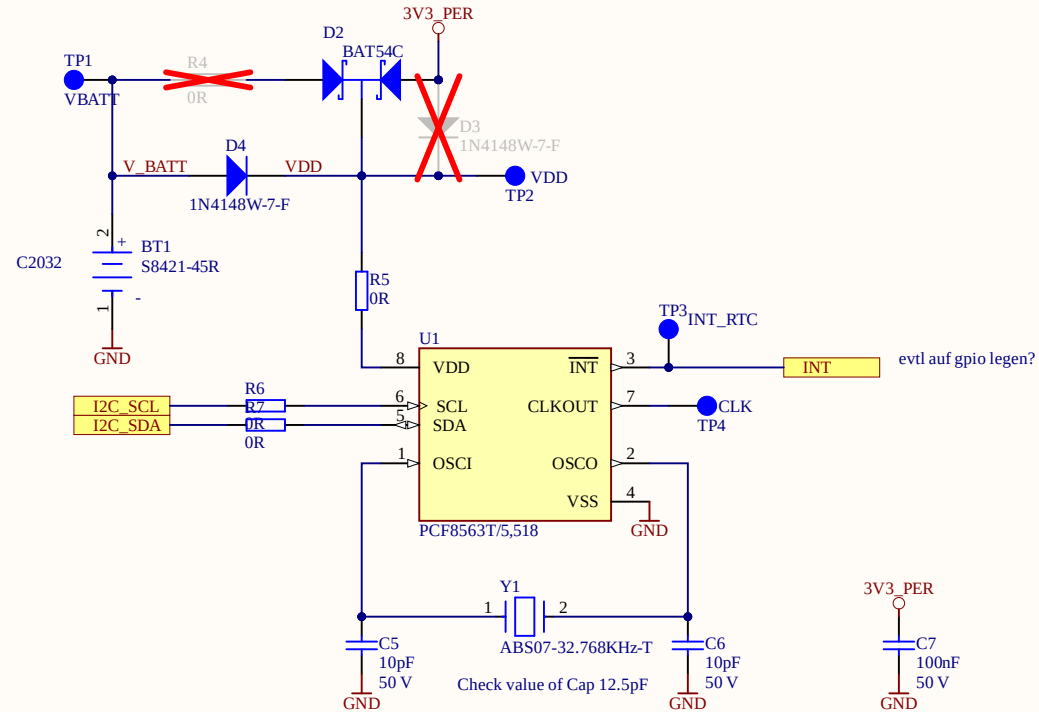

Title RTC.SchDoc

Revision: Rev01

Design Engineer: Eyke Liegmann

Project: UZ\_per\_cb\_upgrade.PrjPcb

\*


[www.ultrazohm.com](http://www.ultrazohm.com)

Date: 27.04.2022

Sheet 3 of 7



Figure 7-1. Device Address

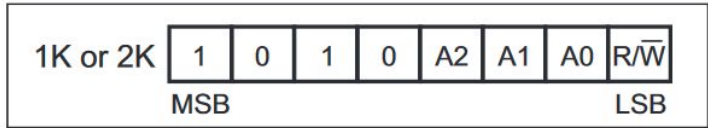

I2C-bus slave address: 0xAX = 0b1010 XXXX

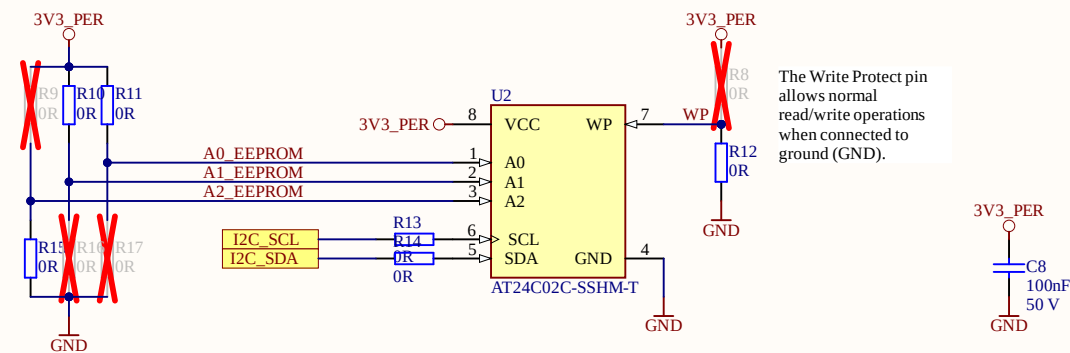




FIGURE 5-1: CONTROL BYTE ALLOCATION






FIGURE 5-1: CONTROL BYTE ALLOCATION

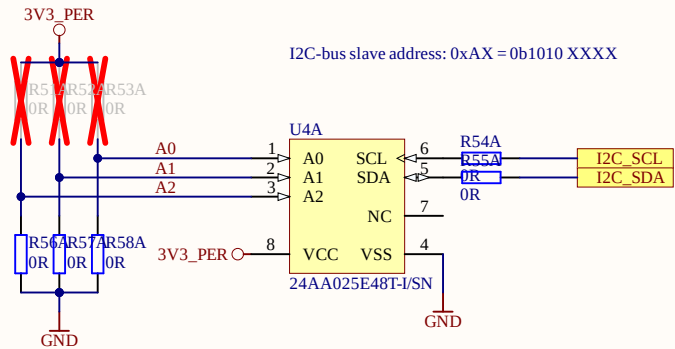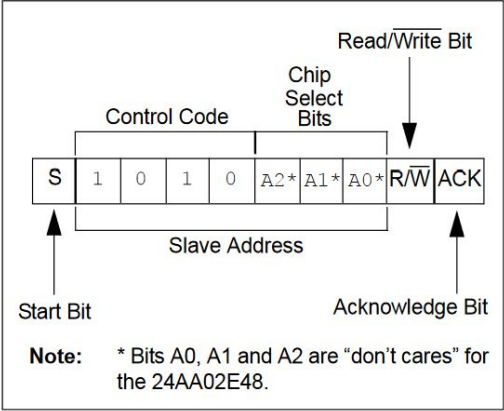