General Purpose Transistor

PNP Silicon

MMBT3906L, SMMBT3906L



Features

- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q101 Qualified and PPAP Capable
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant



SOT−23 (TO−236)
CASE 318
STYLE 6

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector − Emitter Voltage	V_{CEO}	−40	Vdc
Collector − Base Voltage	V_{CBO}	−40	Vdc
Emitter − Base Voltage	V_{EBO}	−5.0	Vdc
Collector Current − Continuous	I_C	−200	mAdc
Collector Current − Peak (Note 3)	I_{CM}	−800	mAdc

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR− 5 Board (Note 1) @ T_A = 25°C Derate above 25°C	P_D	225 1.8	mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	556	°C/W
Total Device Dissipation Alumina Substrate, (Note 2) @ T_A = 25°C Derate above 25°C	P_D	300 2.4	mW mW/°C
Thermal Resistance, Junction−to−Ambient	$R_{\theta JA}$	417	°C/W
Junction and Storage Temperature	T_J, T_{stg}	−65 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR−5 = 1.0 × 0.75 × 0.062 in.
2. Alumina = 0.4 × 0.3 × 0.024 in. 99.5% alumina.
3. Reference SOA curve.

MARKING DIAGRAM



2A = Specific Device Code
M = Date Code*
▪ = Pb−Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or overbar may vary depending upon manufacturing location.

ORDERING INFORMATION

Device	Package	Shipping†
MMBT3906LT1G	SOT−23 (Pb−Free)	3,000 / Tape & Reel
MMBT3906LT3G	SOT−23 (Pb−Free)	10,000 / Tape & Reel
SMMBT3906LT1G	SOT−23 (Pb−Free)	3,000 / Tape & Reel
SMMBT3906LT3G	SOT−23 (Pb−Free)	10,000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector – Emitter Breakdown Voltage (I_C = −1.0 mAdc, I_B = 0)	$V_{(BR)CEO}$	−40	–	Vdc
Collector – Base Breakdown Voltage (I_C = −10 μAdc, I_E = 0)	$V_{(BR)CBO}$	−40	–	Vdc
Emitter – Base Breakdown Voltage (I_E = −10 μAdc, I_C = 0)	$V_{(BR)EBO}$	−5.0	–	Vdc
Base Cutoff Current (V_{CE} = −30 Vdc, V_{EB} = −3.0 Vdc)	I_{BL}	–	−50	nAdc
Collector Cutoff Current (V_{CE} = −30 Vdc, V_{EB} = −3.0 Vdc)	I_{CEX}	–	−50	nAdc
ON CHARACTERISTICS (Note 4)				
DC Current Gain (I_C = −0.1 mAdc, V_{CE} = −1.0 Vdc) (I_C = −1.0 mAdc, V_{CE} = −1.0 Vdc) (I_C = −10 mAdc, V_{CE} = −1.0 Vdc) (I_C = −50 mAdc, V_{CE} = −1.0 Vdc) (I_C = −100 mAdc, V_{CE} = −1.0 Vdc)	H_{FE}	 60 80 100 60 30	 – – 300 – –	–
Collector – Emitter Saturation Voltage (I_C = −10 mAdc, I_B = −1.0 mAdc) (I_C = −50 mAdc, I_B = −5.0 mAdc)	$V_{CE(sat)}$	 – –	 −0.25 −0.4	Vdc
Base – Emitter Saturation Voltage (I_C = −10 mAdc, I_B = −1.0 mAdc) (I_C = −50 mAdc, I_B = −5.0 mAdc)	$V_{BE(sat)}$	 −0.65 –	 −0.85 −0.95	Vdc
SMALL– SIGNAL CHARACTERISTICS				
Current – Gain – Bandwidth Product (I_C = −10 mAdc, V_{CE} = −20 Vdc, f = 100 MHz)	f_T	250	–	MHz
Output Capacitance (V_{CB} = −5.0 Vdc, I_E = 0, f = 1.0 MHz)	C_{obo}	–	4.5	pF
Input Capacitance (V_{EB} = −0.5 Vdc, I_C = 0, f = 1.0 MHz)	C_{ibo}	–	10	pF
Input Impedance (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{ie}	2.0	12	kΩ
Voltage Feedback Ratio (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{re}	0.1	10	X 10^{-4}
Small – Signal Current Gain (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{fe}	100	400	–
Output Admittance (I_C = −1.0 mAdc, V_{CE} = −10 Vdc, f = 1.0 kHz)	h_{oe}	3.0	60	μmhos
Noise Figure (I_C = −100 μAdc, V_{CE} = −5.0 Vdc, R_S = 1.0 kΩ, f = 1.0 kHz)	NF	–	4.0	dB
SWITCHING CHARACTERISTICS				
Delay Time	(V_{CC} = −3.0 Vdc, V_{BE} = 0.5 Vdc, I_C = −10 mAdc, I_{B1} = −1.0 mAdc) t_d	–	35	ns
Rise Time	t_r	–	35	
Storage Time	(V_{CC} = −3.0 Vdc, I_C = −10 mAdc, I_{B1} = I_{B2} = −1.0 mAdc) t_s	–	225	ns
Fall Time	t_f	–	75	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%.

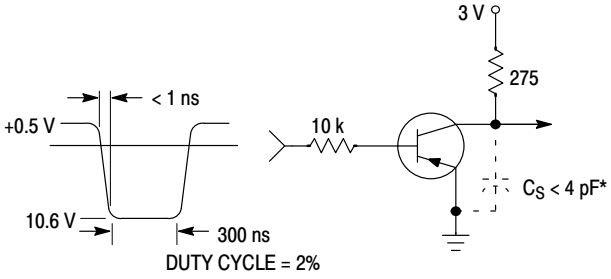

Figure 1. Delay and Rise Time Equivalent Test Circuit

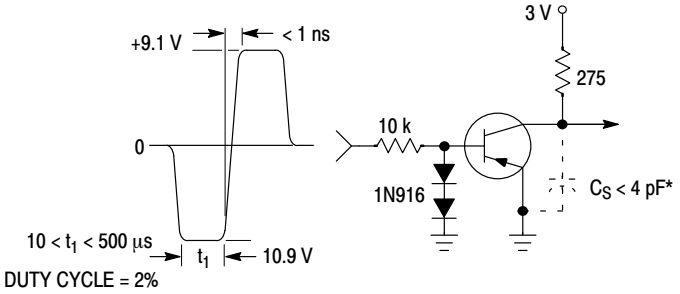

Figure 2. Storage and Fall Time Equivalent Test Circuit

* Total shunt capacitance of test jig and connectors

TYPICAL TRANSIENT CHARACTERISTICS

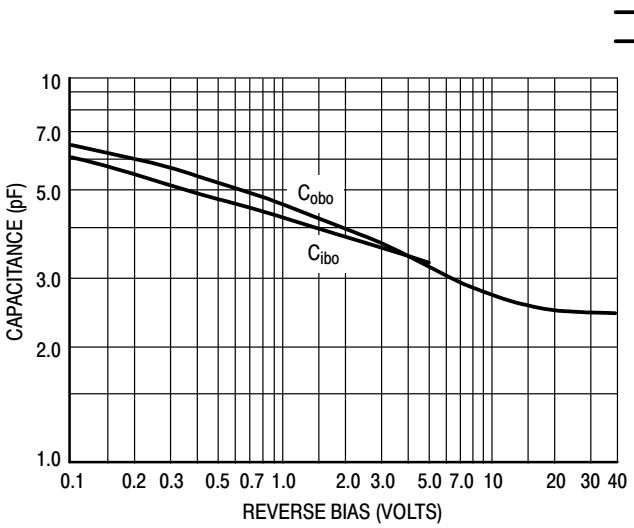

Figure 3. Capacitance

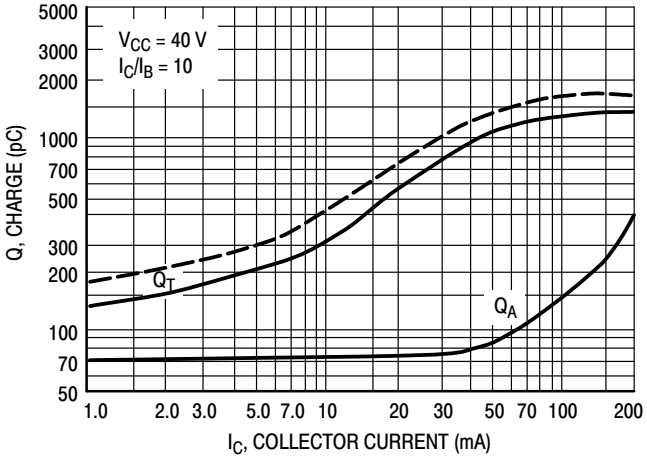

Figure 4. Charge Data

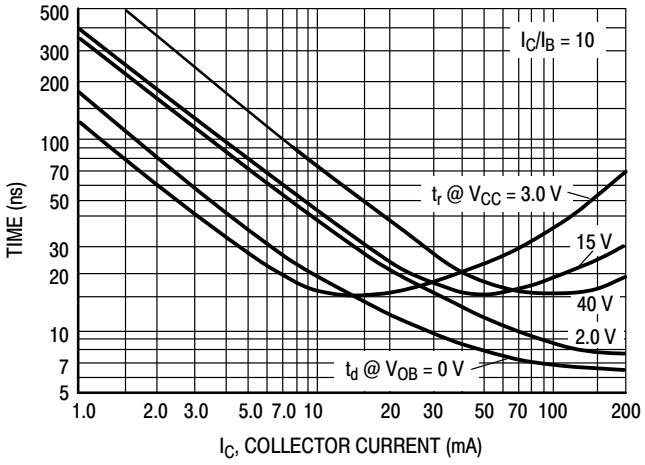

Figure 5. Turn – On Time

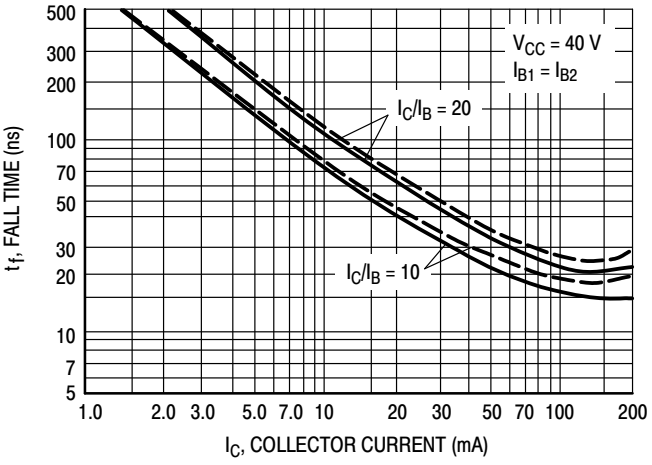

Figure 6. Fall Time

TYPICAL AUDIO SMALL−SIGNAL CHARACTERISTICS
NOISE FIGURE VARIATIONS

(V_{CE} = −5.0 Vdc, T_A = 25°C, Bandwidth = 1.0 Hz)

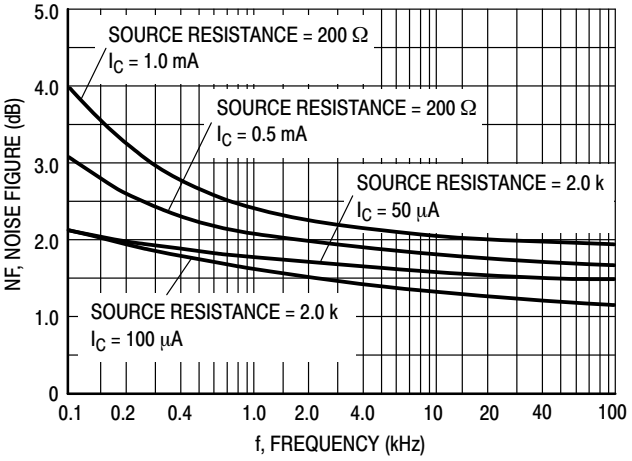

Figure 7.

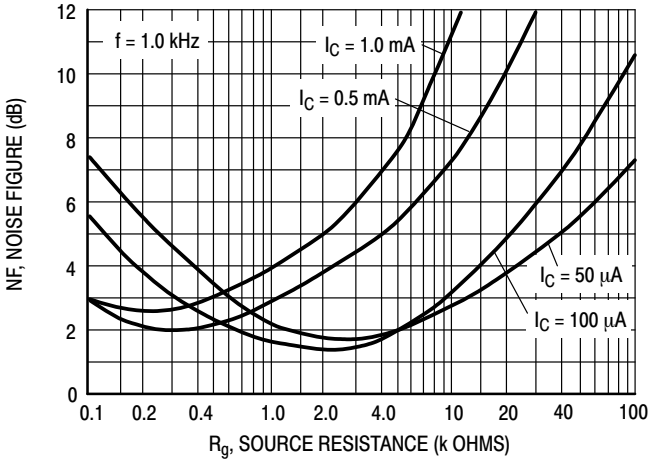

Figure 8.

h PARAMETERS

(V_{CE} = −10 Vdc, f = 1.0 kHz, T_A = 25°C)

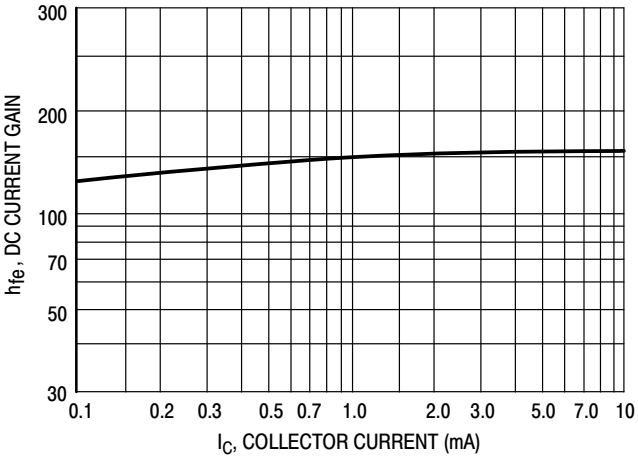

Figure 9. Current Gain

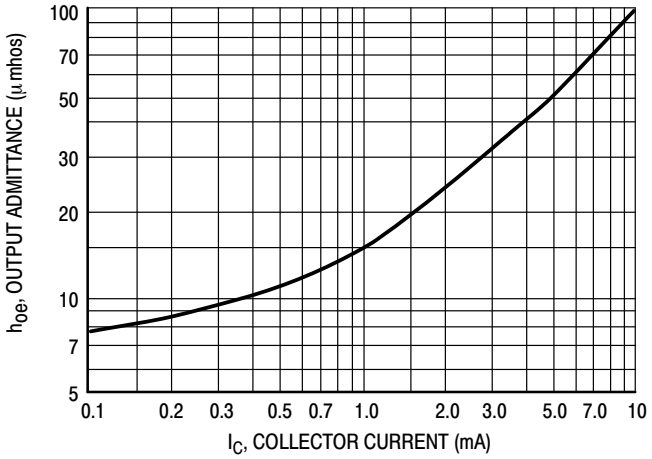

Figure 10. Output Admittance

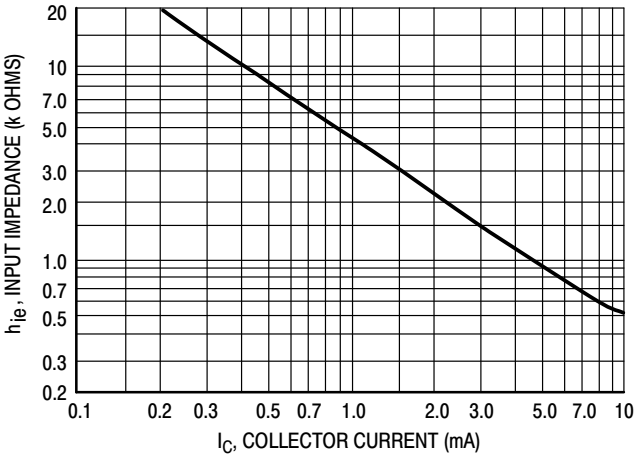

Figure 11. Input Impedance

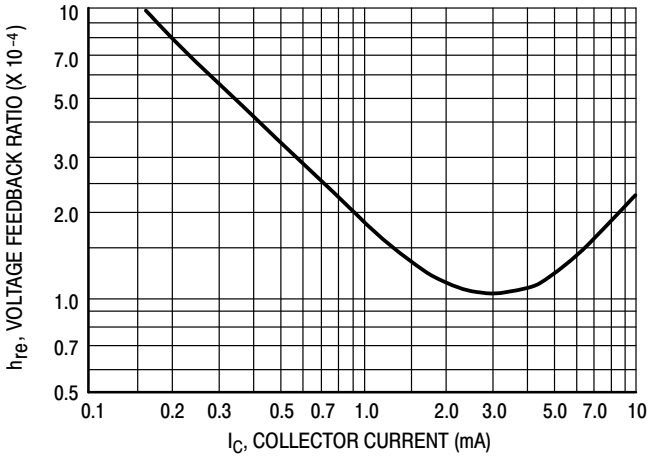

Figure 12. Voltage Feedback Ratio

TYPICAL STATIC CHARACTERISTICS

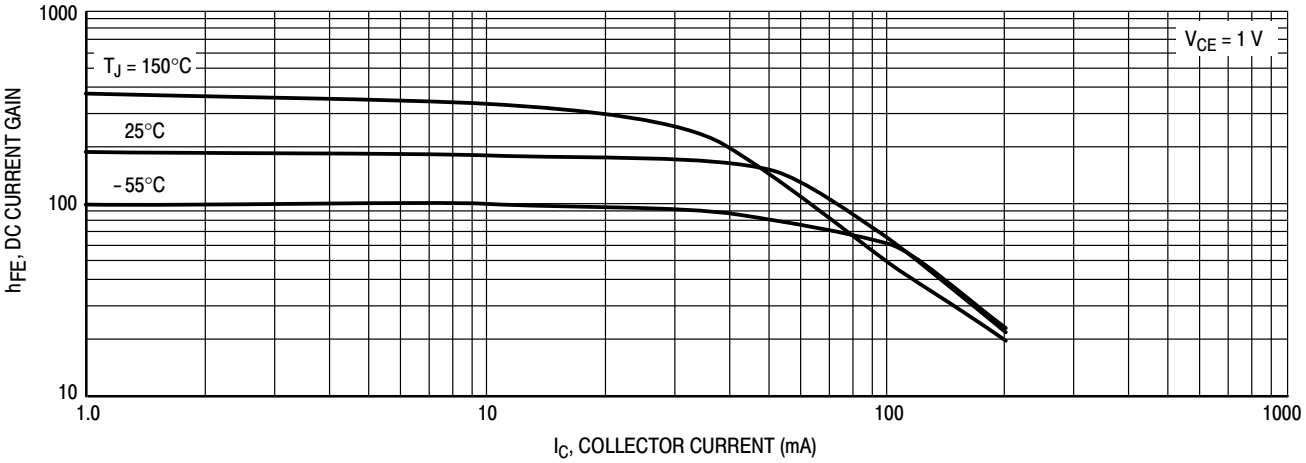

Figure 13. DC Current Gain

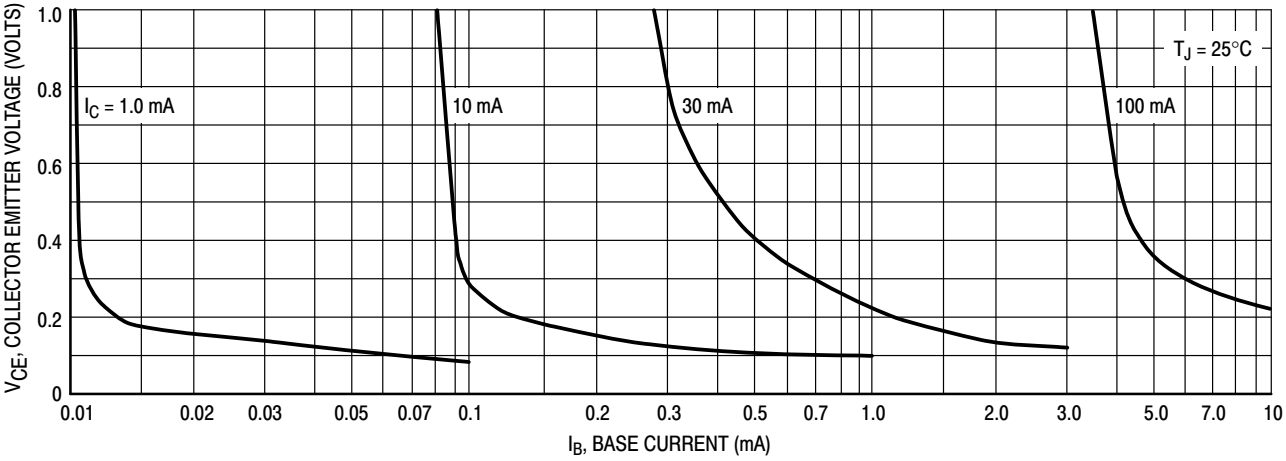

Figure 14. Collector Saturation Region

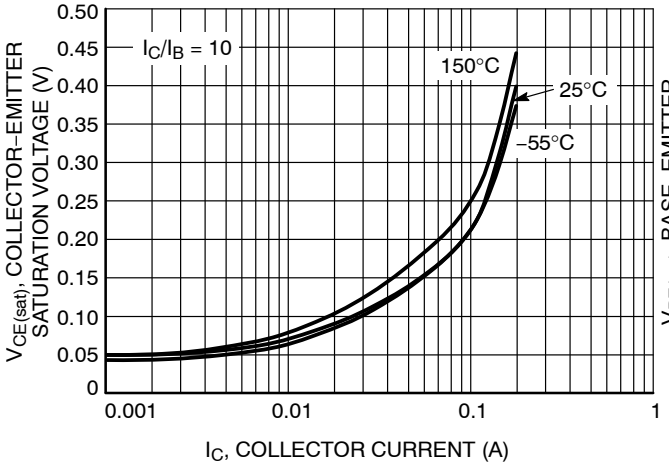

Figure 15. Collector Emitter Saturation Voltage vs. Collector Current

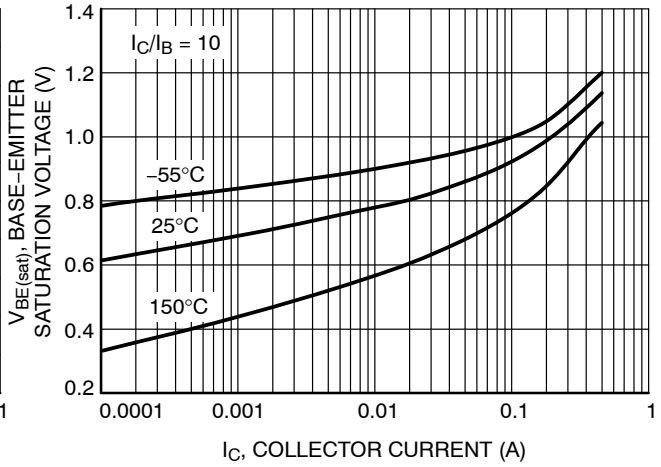

Figure 16. Base Emitter Saturation Voltage vs. Collector Current

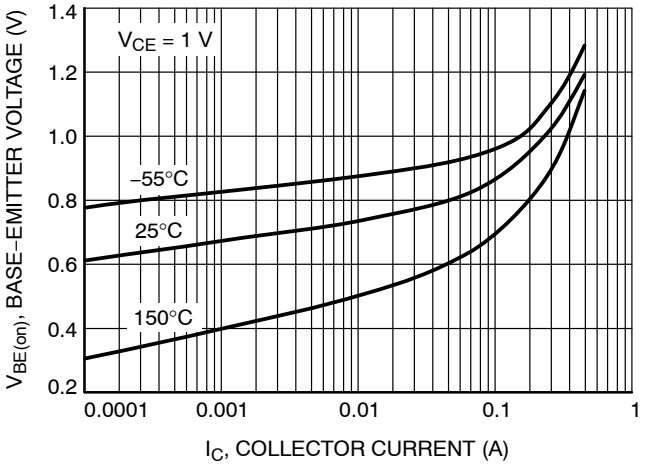

Figure 17. Base Emitter Voltage vs. Collector Current

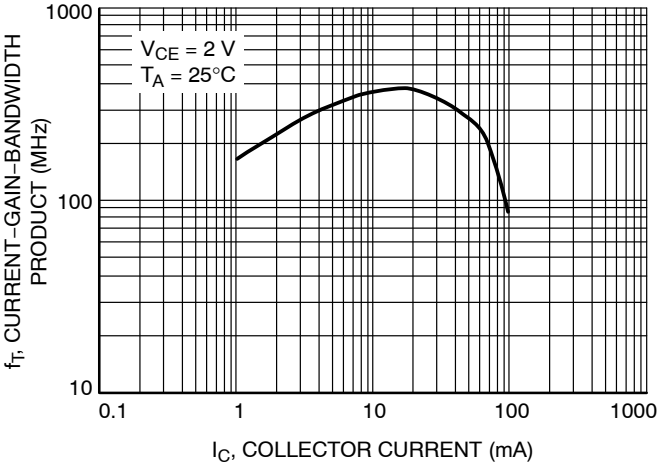

Figure 18. Current Gain Bandwidth vs. Collector Current

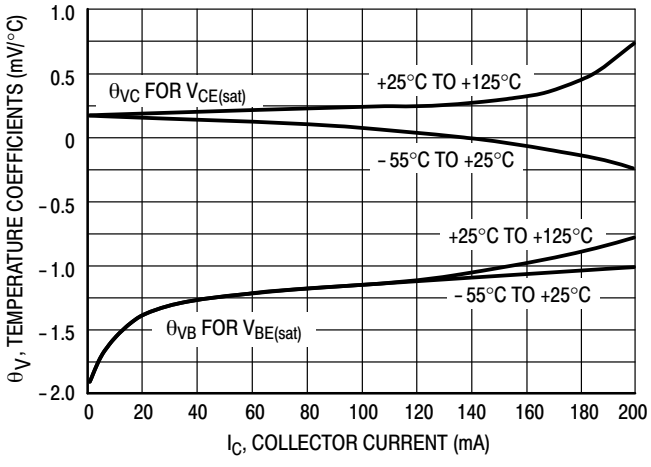

Figure 19. Temperature Coefficients

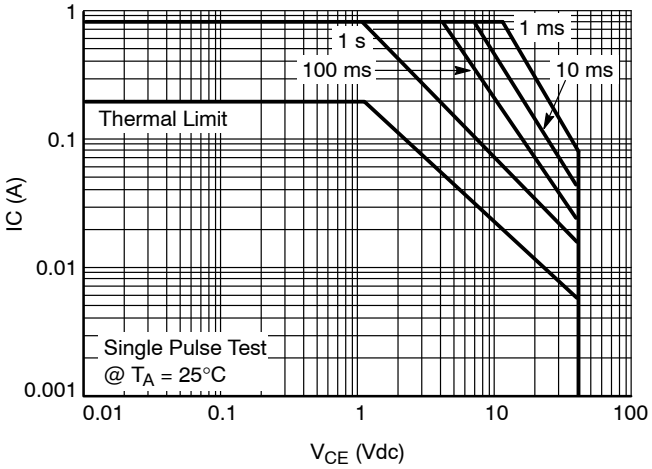

Figure 20. Safe Operating Area



SCALE 4:1

SOT−23 (TO−236) 2.90x1.30x1.00 1.90P
CASE 318
ISSUE AU

DATE 14 AUG 2024

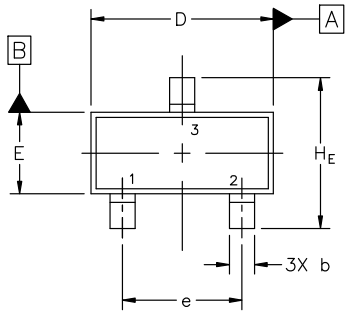

TOP VIEW



DETAIL "A"
Scale 3:1



SIDE VIEW

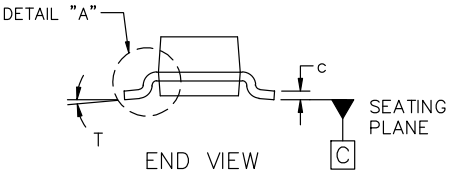

END VIEW

MILLIMETERS			
DIM	MIN	NOM	MAX
A	0.89	1.00	1.11
A1	0.01	0.06	0.10
b	0.37	0.44	0.50
c	0.08	0.14	0.20
D	2.80	2.90	3.04
E	1.20	1.30	1.40
e	1.78	1.90	2.04
L	0.30	0.43	0.55
L1	0.35	0.54	0.69
H_E	2.10	2.40	2.64
T	0°	−−−	10°

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSIONS: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

GENERIC
MARKING DIAGRAM*



XXX = Specific Device Code
M = Date Code
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

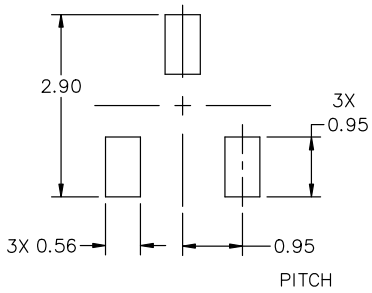

RECOMMENDED
MOUNTING FOOTPRINT

* For additional information on our Pb−Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLES ON PAGE 2

DOCUMENT NUMBER:	**98ASB42226B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**SOT−23 (TO−236) 2.90x1.30x1.00 1.90P**		**PAGE 1 OF 2**

SOT−23 (TO−236) 2.90x1.30x1.00 1.90P
CASE 318
ISSUE AU

DATE 14 AUG 2024

STYLE 1 THRU 5:
CANCELLED

STYLE 6:
PIN 1. BASE
2. EMITTER
3. COLLECTOR

STYLE 7:
PIN 1. EMITTER
2. BASE
3. COLLECTOR

STYLE 8:
PIN 1. ANODE
2. NO CONNECTION
3. CATHODE

STYLE 9:
PIN 1. ANODE
2. ANODE
3. CATHODE

STYLE 10:
PIN 1. DRAIN
2. SOURCE
3. GATE

STYLE 11:
PIN 1. ANODE
2. CATHODE
3. CATHODE−ANODE

STYLE 12:
PIN 1. CATHODE
2. CATHODE
3. ANODE

STYLE 13:
PIN 1. SOURCE
2. DRAIN
3. GATE

STYLE 14:
PIN 1. CATHODE
2. GATE
3. ANODE

STYLE 15:
PIN 1. GATE
2. CATHODE
3. ANODE

STYLE 16:
PIN 1. ANODE
2. CATHODE
3. CATHODE

STYLE 17:
PIN 1. NO CONNECTION
2. ANODE
3. CATHODE

STYLE 18:
PIN 1. NO CONNECTION
2. CATHODE
3. ANODE

STYLE 19:
PIN 1. CATHODE
2. ANODE
3. CATHODE−ANODE

STYLE 20:
PIN 1. CATHODE
2. ANODE
3. GATE

STYLE 21:
PIN 1. GATE
2. SOURCE
3. DRAIN

STYLE 22:
PIN 1. RETURN
2. OUTPUT
3. INPUT

STYLE 23:
PIN 1. ANODE
2. ANODE
3. CATHODE

STYLE 24:
PIN 1. GATE
2. DRAIN
3. SOURCE

STYLE 25:
PIN 1. ANODE
2. CATHODE
3. GATE

STYLE 26:
PIN 1. CATHODE
2. ANODE
3. NO CONNECTION

STYLE 27:
PIN 1. CATHODE
2. CATHODE
3. CATHODE

STYLE 28:
PIN 1. ANODE
2. ANODE
3. ANODE

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales