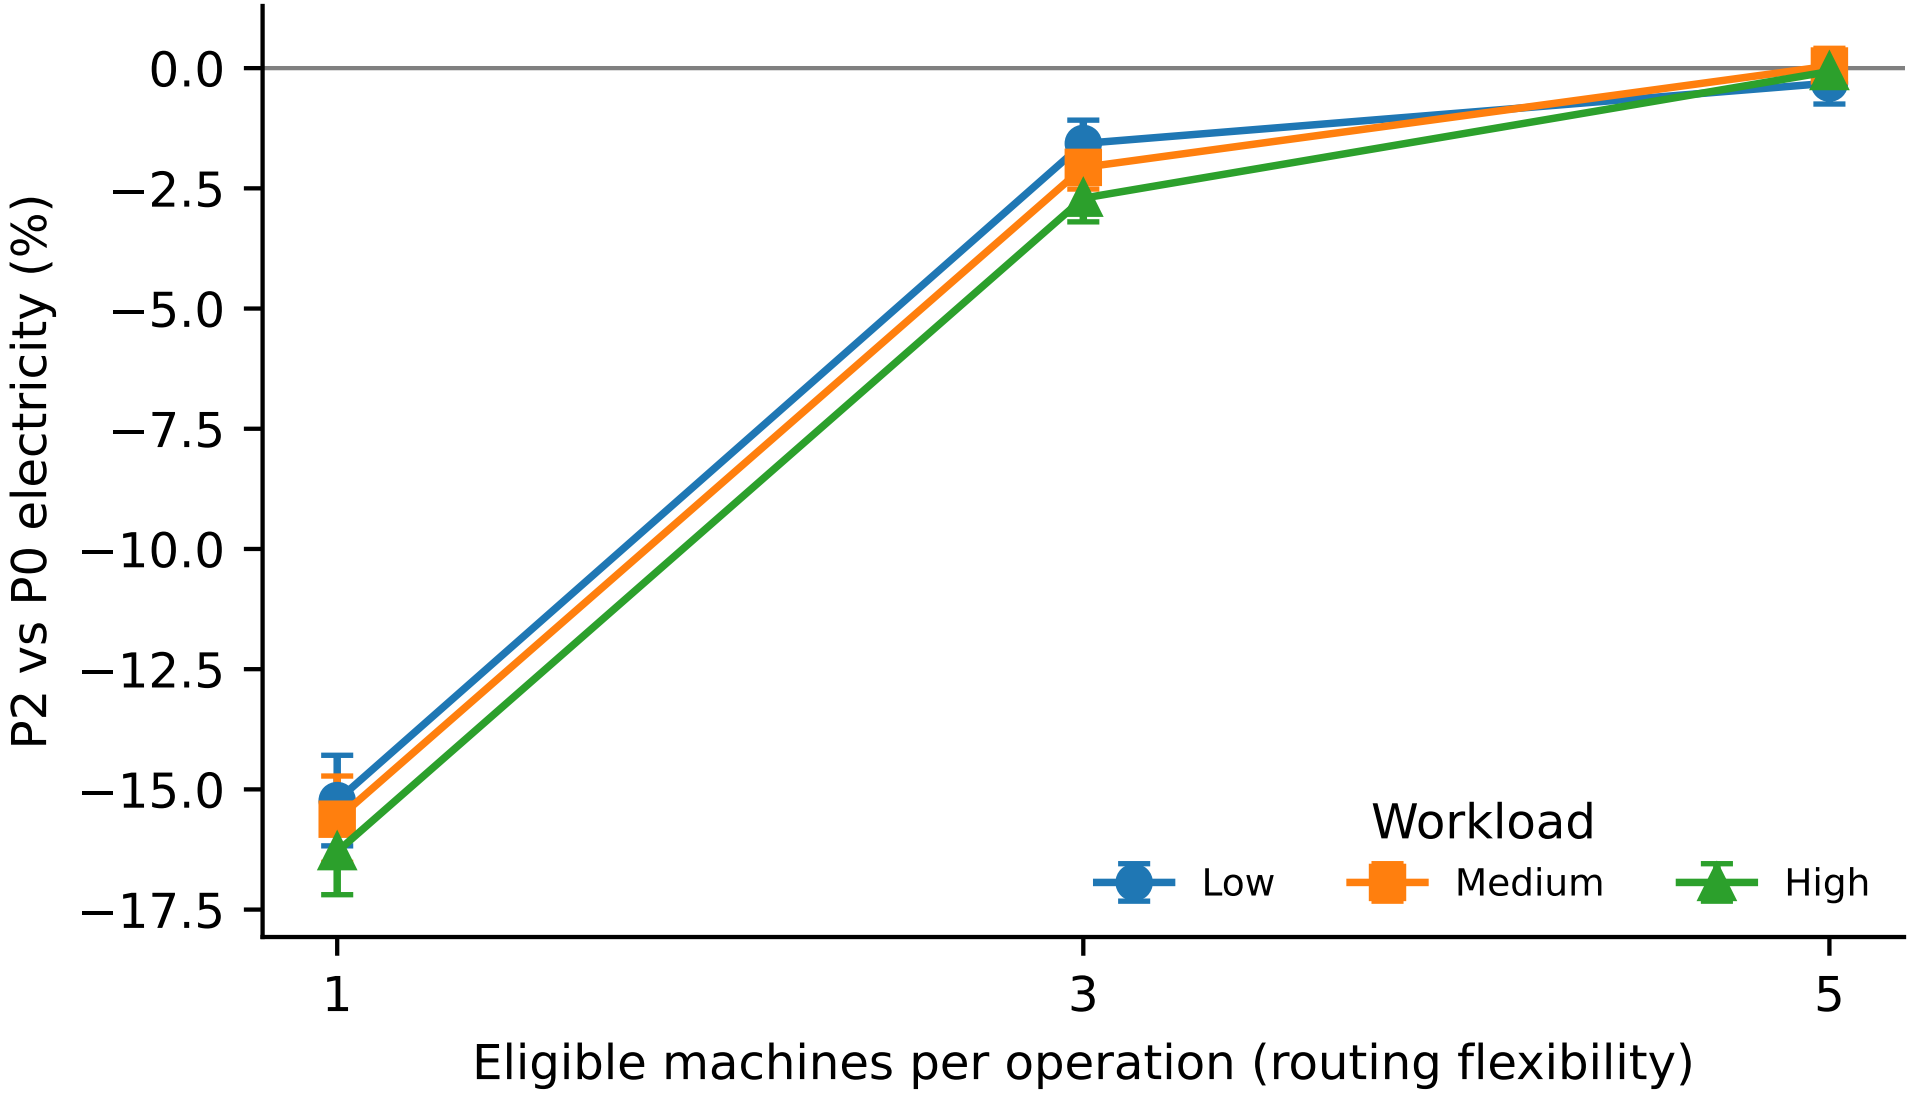
0.0
−2.5
−5.0
−7.5
−10.0
−12.5
−15.0
−17.5
P2 vs P0 electricity (%)
1
3
5
Eligible machines per operation (routing flexibility)
Workload
Low
Medium
High