DRAFT / SOURCE REFERENCE



CODY / VIBEWARE

CCP Communication Atlas

A visual guide to pairing, replies and voice

DRAFT / 15 October 2026

Copyright (c) 2026 Umberto Giacobbi

umbertogiacobbi.biz

Contents

Main sections / click a row to jump to its page

System map 3

Setup 4

Pairing 5

Everyday work 6

Questions 7

Recording 8

Audio delivery 9

Available operations 10

Diagnosis 11

Sources and evidence 12


Revision register 13

Security 17

Page numbers refer to this PDF. Earlier page references in historical notes retain their original edition numbering.

01 / THE WHOLE SYSTEM

One device, one PC, one chat

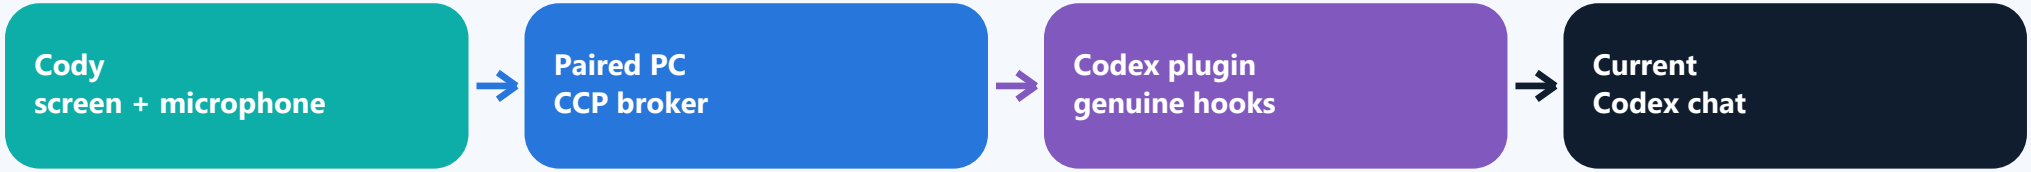

The network link carries device state and authenticated commands. The plugin adds real chat events. These are different sources of truth.

Pairing

Both sides remember one intended PC. A saved identity alone says nothing about whether it is online.

Presence

Fresh authenticated LAN replies show that the paired PC is reachable now. Internet availability is separate.

Activity

Real Codex hooks identify the followed chat, its current work and when a reply is ready.

02 / DECIDE FROM SAVED STATE

From power-on to Setup

No Wi-Fi?
Provision locally

→

Wi-Fi, no IP?
Reconnect

→

No pairing?
Offer Connect

→

Saved pair?
Find same PC

Only a real IP opens the next step

Keep saved Wi-Fi credentials during a reconnect. A storage error is not an absent profile. The installation QR starts no radio; Bluetooth provisioning begins only when selected.

Setup is reversible

Connect Codex, Network setup and Options are explicit choices. Saying No or Later does not create a pairing request or erase existing settings.

Cody route: Welcome 04-09 → preferences 10/36/11 → pairing 12-15 → connected work 16-20.

Illustrative route map; screen IDs remain stable across PDF revisions.

03 / TWO-SIDED PAIRING

Pair once, prove presence each time

Fresh six-character code on Cody → **PC selects one matching offer** → **Both save pending then commit** → **Fresh READY / COMMITTED proof**

The old link survives a failed replacement

PC candidate: DPAPI. Cody candidate: separate NVS pending record. Promotion follows authenticated proof and durable readback.

Discovery is not connection

FIND alone cannot show the PC as present, redirect notifications or reveal current activity. READY binds a fresh challenge to the observed endpoint.

If there are zero or multiple matching offers, stop with an error. Never pick the first PC; never reuse a code from a screenshot.

04 / EVERYDAY STATE

Work and link are separate

PC connected

Fresh authenticated broker presence. It does not prove a chat is active.

Working

Actual prompt and tool hooks name the followed chat and observed phase.

Reply ready

A Stop hook says the response is available; it does not certify task success.

Working


Example chat title: Improve audio flow

Tokens • Model • Connection • Chat


Illustrative Home panel, not a device capture. Activity expires after 120 s; PC presence after 8 s without current replies.

05 / REPLY FLOW

A question waits for its real recipient

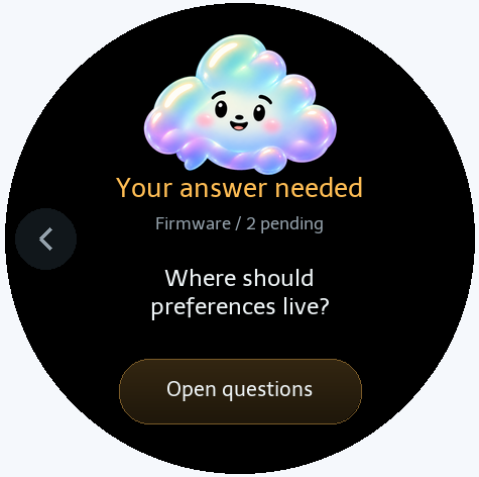


1 / Notice / concept mockup

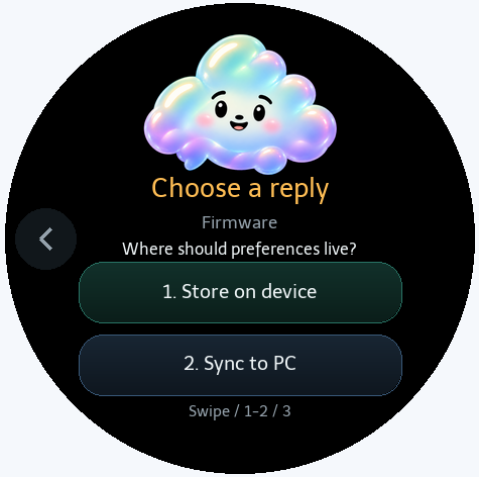

2 / Choose / concept mockup



3 / Review / concept mockup

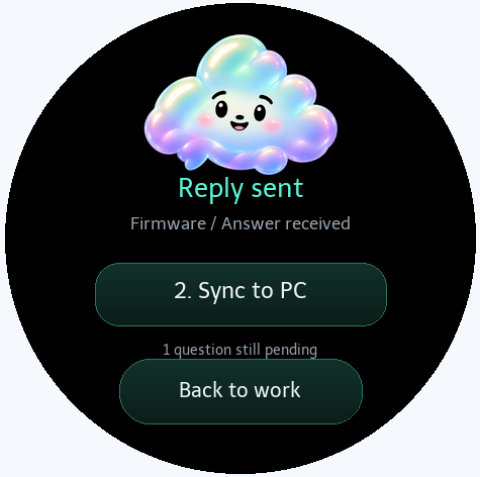

4 / Delivered / concept mockup

Two numbered, full-width choices fit at once; swipe for a third. Tap a choice to read it fully, then Send. A broker receipt is still not delivery: only the recipient's matching answer_id ACK makes it Reply sent.

06 / VOICE FLOW

Record, then decide to send



Voice animation proposal / not a physical capture

A shake or double tap discards Listening. A single tap requests Send. No transcript or audio archive is written to Cody's SD or internal flash.

Prepare — Complete screen visible before input admission.

3, 2, 1 — Countdown; tap cancels before capture.


Listen — AFE supplies real 16 kHz PCM; VAD tracks speech and silence.

5 s quiet — Five acquired silent seconds start Send countdown.

3, 2, 1 — Tap cancels; no END is sent until countdown completes.

07 / CURRENT LIMIT

Audio handoff: where proof stops

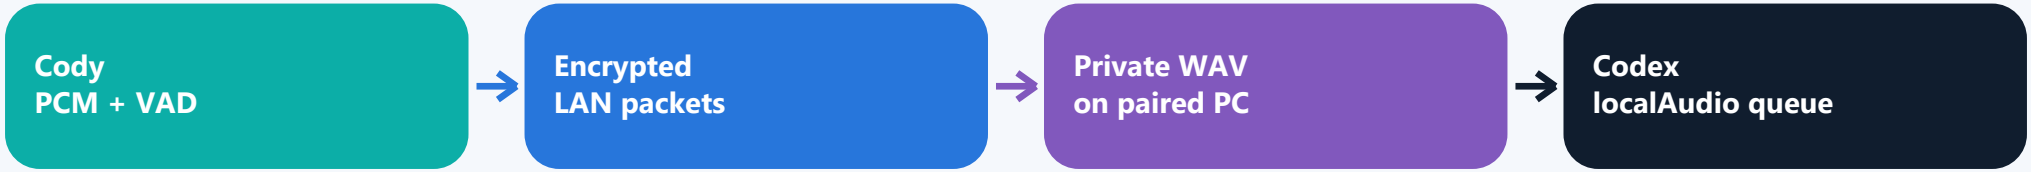

What the pilot proved

A synthetic WAV was admitted to the public experimental queue for this exact chat. It then left that queue.

What this chat actually showed

The received turn said: audio content omitted because audio input is unsupported. Speech was not understood or transcribed.

Do not enable physical voice submission through this path yet. The documented model catalog exposes input modalities; this chat omitted the pilot audio. Desktop Voice is a UI feature, not a documented external-WAV injection point.

08 / CUSTOMER OPERATIONS

What you can ask CCP to do

Connect

Discover the physical Cody; pair with its live code; read retained and current connection; list genuine followed sessions.

Inform

Report actual progress; publish a known notice; ask a bounded question; poll and acknowledge its answer.

Personalize

Read or set preferred name, timezone and quiet hours. Readback confirms a durable change; unsupported values fail.

Inspect or power

Read audio status; show diagnostics in Debug and Release. Tap Memory on Cody for heap details. Restart and factory reset require explicit current intent and confirmation.

Native Codex approvals remain on the computer. CCP has no arbitrary shell, mount browser, firmware updater, transcript reader or PR action tool.

09 / A SHORT DECISION TREE

Diagnose the right layer

No device IP?
Fix Wi-Fi

→

No authenticated PC?
Check LAN + broker

→

No real chat?
Check hooks

→

No audio reply?
Check model support

Do not erase to fix a disconnect

A missing PC or Internet does not remove saved pairing. Keep the same PC identity and retry discovery. A failed write or invalid saved record remains a real error.

Keep the evidence levels separate

Queued ≠ consumed; consumed ≠ model-supported; sent ≠ understood. For questions, received ≠ recipient-delivered. A worker ACK ≠ visible pixels.

Security boundary: CCP is authenticated but ordinary LAN metadata is not encrypted. The six-character pairing transcript remains offline-guessable; a standard PAKE/AEAD redesign is deferred.

10 / WHERE TO LOOK NEXT

Source map and evidence

Packet and device contract

plugins/cody-codex-plugin/protocol/CCP1.md defines fields, order, size and authentication. Firmware owns sensor reads, settings and screens.

PC and Codex integration

The installed CCP plugin owns pairing journals, hooks, private question tickets and audio receipt. The Codex App Server documents model/list and its model modalities.

Artwork and screen IDs

Question and voice images here are versioned design proposals. Navigation and planning atlases hold detailed UI routes; this PDF keeps the communication journey.

What is actually verified

The pilot verified queue admission and removal, then this chat reported omitted audio. It did not verify speech recognition or physical audio delivery. The revision register preserves older evidence limits.

Revision register

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-04 CHANGE	**One intended PC on a busy LAN** Retain exactly one PC identity. Commissioning, saved pairing and fresh presence are distinct; the original worksheet remains in Git. Affected: Original Connection pages 9 and 14; screens 12-16, 32, 35B, 40-42
2026-10-04 CHANGE	**A03: PRs remain read-only** Watch the supplied PR head and real check names. PR action and native approval stay on the PC; screen 25 was retired. Affected: Service scope/security; Connection 9-14; screens 21-30
2026-10-09 ADDENDUM	**Startup decisions and reversible Setup** Saved Wi-Fi without pairing offers a real Yes/No. Setup can reopen. No/Later writes nothing; saved pairing searches the same PC. Affected: Service 11-13; Connection 15-17; original screens 12-16, 40-42
2026-10-09 ERRATA	**Setup recovery after standby** The old timeout hid Setup. A fresh, stationary hold can reopen it; movement, wake time and busy work cancel. Earlier capture did not test Connect Codex. Affected: Service 14-15; Connection 18-19; screens 04-06, 12, 35B, 41
2026-10-09 CHANGE	**Approved action layout and Options entry** Two semantic cards sit side by side, a third below; Back remains lateral. Options returns to its caller. The approved artwork is a design reference, not a device capture. Affected: Service 16-18; Connection 20-22; screens 05-15, 35B, 36, 40-42
2026-10-09 ERRATA	**Malformed touch report interrupted rendering** Captured: Yes 16497 ms, Connect Codex 16498 ms, then fifteen FF bytes and ACK=FF at 17112 ms (expected AB). Preserve ESP_ERR_INVALID_RESPONSE; runtime gesture interruption does not prove hardware cause. Affected: Service 17-18; Connection 21-22; screens 12 and 35B
2026-10-10 ADDENDUM	**Earlier CCP 0.3 activity proposal** Historical metadata hooks and manual selection were later superseded by the latest genuine prompt. Presence, hook freshness and user-reported earlier connection were different evidence. Affected: Service 19-20; Connection 23-24; original Service 1-2, 7-8, 10 / Connection 10-11, 13

Revision register

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-10 CHANGE	**Retained pairing and two-sided commit** PC DPAPI candidate and Cody ccp_pending preserve old active links. Fresh READY/COMMITTED proves the candidate; Cancel, Keep, Pair again and Forget have different effects. Affected: Service 21-24; Connection 25-28; screens 04-16, 32, 35B, 36, 40-42
2026-10-10 ADDENDUM	**Notifications, choices and recipient delivery** Question tickets expire within 180 s. Received is not delivered until answer_id ACK; no timeout selects a reply. Historical wire limits remain dated facts. Affected: Service 25-28; Connection 29-32; screens 21-27, 31-32
2026-10-10 ERRATA	**Acknowledgement is admission, not reset completion** Restart preserves settings; factory reset verifies erasure of Wi-Fi, pairing and preferences before reboot. A signed ACK alone proves neither reboot nor wipe. Affected: Service 27-28; Connection 31-32; reset and factory-reset commands
2026-10-10 CHANGE	**Current boot, setup and complete controls** Boot artwork, QR timing, local-IP gate and immediate saved-PC search replaced older detours. Persist/read back preferences before claiming success; historical route sketches are not current behavior. Affected: Service 29-32; Connection 33-36; boot 01-03, Wi-Fi 04-09/42, preferences 10/36/11, Codex 12-15/40/41
2026-10-10 CHANGE	**Consolidated service and connection atlas** Earlier Service and Connection atlases were unified, with original page/screen references and dated errata retained. Old source PDFs remain recoverable in Git. Affected: Both source atlases in full; consolidated pages 1-13 and Revision register
2026-10-11 ERRATA	**English correction retained from both earlier atlases** Earlier Italian headings, captions, copy and footers were translated to English; dates, IDs, artwork meaning and evidence limits were preserved. Affected: Service page 33; Codex Connection page 37; original historical pages referenced therein
2026-10-12 CHANGE	**One canonical CCP communication reference** Unify commissioning, protocol, operator and voice material; keep the separate A5 quickstart. Source-only audio design, packet fields and resource bounds are not physical delivery proof. Affected: All three technical source PDFs; A5 quickstart context; current CCP1.md, ccp_voice_input.py and LUNASHELL_voice_input.cpp

Revision register

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-12 CHANGE	**Audio review: bounded window, readiness and honest uncertainty** Four 480-sample DATA packets, cumulative ACK and identical-ciphertext retry supersede one-packet send. Readiness is not localAudio support; uncertain native submission is retained without replay. Affected: Current main pages 24-26; original voice screens 28-30; firmware voice owner and PC native-audio broker
2026-10-12 ADDENDUM	**Operator capabilities, customer tools and Debug boundaries** Inventory customer and Debug operations. Applied ACK is not pixel evidence. No mount browser, arbitrary shell, face override or remote first-boot setter exists. Affected: Original Communication main pages 1-28, protocol/MCP control chapters; added operator pages 27-34; CODY first-boot settings, plugin catalog, skills and command handlers
2026-10-12 CHANGE	**Plain-language pairing and voice handoff** Explain the PC/device/chat roles. A changed followed chat rejects the recording before submission; Cody stores no SD/internal-flash audio archive. Affected: Current atlas opening pages 1-4; source voice screens 28-30; original communication pages 1-28; CCP voice input source increment
2026-10-12 CHANGE	**Coordinated cover and navigable contents** VibeWare cover, copyright and clickable section contents were added. Historical page numbers remain original-edition references. Affected: All original pages; existing correction and Security sections preserved
2026-10-15 CHANGE	**Voice countdowns, public audio API and integration policy** Three-second listening and sending countdowns plus five acquired silent seconds. Public localAudio queue admission was a pilot, not transcription. Unsupported private bridges were removed. Affected: Existing opening voice page; original voice screens 28-30; current audio/native/operator chapters; added Audio input chapter in this same atlas
2026-10-15 CHANGE	**Public audio pilot outcome** The synthetic WAV left the queue, but the Desktop chat displayed that audio content was omitted because audio input is unsupported. Physical voice submission stays disabled. Affected: Current audio pilot; original voice screens 28-30
2026-10-15 CHANGE	**Visual journey replaces the table-heavy atlas** Replace the 49-page text-heavy edition with a short visual journey, source-labelled UI proposals and diagrams. Preserve dated corrections and crosswalks in this final grid. Affected: All former communication-atlas pages; original screens 01-42

Revision register

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-17 CHANGE	**Current diagnostics and visual-guide content contract** Diagnostics work in Debug and Release; Memory is opened locally on Cody. Validate the current visual journey and its source/proof boundaries; obsolete listener/turn RPC text is not a current requirement. Original dates, IDs and Security history remain. Affected: Current core page 8 / physical PDF page 10; original diagnostic screen 38 and local Memory route

Security

DATE / TYPE	CHANGE / AFFECTED ORIGINAL PAGES AND SCREENS
2026-10-10 SECURITY	**Fresh endpoint-bound proof before current data** A recorded FIND cannot establish presence or obtain current data. READY binds a fresh one-time challenge to observed IP/port; matching COMMITTED gates current metadata and recovery. Affected: Core page 4; FIND / READY / COMMITTED; screens 12-15 and current activity/questions
2026-10-10 SECURITY	**Bound unauthenticated work and retained logs** Device/PC ingress, discovery, verifier work and broker logs have explicit limits. Startup runtime.log growth and real flood/pairing measurements remain separate open evidence. Affected: Core page 10; device worker, PC discovery/pairing, broker ingress and runtime logs
2026-10-10 SECURITY	**Remaining protocol risks are explicit** Six-character transcripts permit offline guessing and ordinary CCP metadata is not confidential. Standard PAKE or high-entropy pairing plus authenticated encryption needs a coordinated redesign. Affected: Pairing verifier/link-key derivation; ACTIVITY / TECH / EVENT; optional HTTP