CODY / VIBEWARE



Planning Atlas

Current responsibilities, geometry and cloud implementation boundaries.

DEVELOPMENT REFERENCE / 13 November 2026

Umberto Giacobbi / umbertogiacobbi.biz / Copyright (c) 2026

Current behavior and limitations. Original correction dates and screen IDs remain in the final register.

Contents

Use screen IDs for product identity; PDF page numbers are navigation only.

Product and source boundaries	3
Circular layout	4
Current screen identities	5
Original screen ID inventory	6
Cloud trust model	7
Enrollment and client grants	8
Service operation	9
Acceptance boundaries	10
Corrections register	11
Security	18

One device, separate owners

Current repository source is the reference. Firmware execution, physical behavior and the private cloud service require their own verification. After VibeWare, Home can show Counter mode or the interactive Cody character. Cloud firmware integration is deferred.

Platform

Acquisition owners read hardware. DeviceSnapshotService publishes validity, timestamps, health and actual errors. Consumers do not create parallel caches, sensor reads or stale-as-current fallbacks.

Device presentation

A device model owns route and interaction state. The renderer owns prepared glyphs, layouts and the last retired frame. Partial output does not become the next displayed-state reference.

Local host

CCP owns the local identity, protected credentials, hooks and semantic events. App presence, current chat activity and account observations keep independent freshness and identity.


Optional cloud

The relay belongs in its own private service repository, separate from the public firmware. Identity, grants and bounded delivery have separate owners. This public overview explains architecture and limits without distributing the implementation or claiming deployment.

Sources: docs/cody/navigation.md, layout.md, runtime.md; cody-desktop/plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

The circle and the complete touch target

Shared source geometry for the current 466 x 466 board; schematics are not measured bezel or touch calibration.

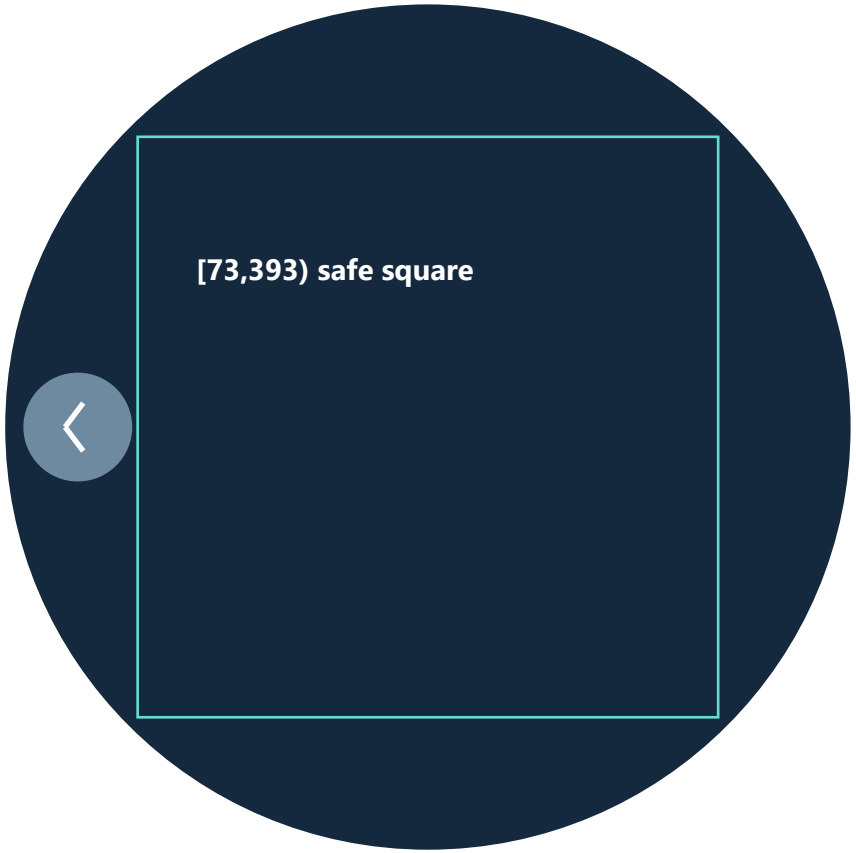

466 x 466

Center (233,233), radius 233. The baseline square is 320 x 320 at (73,73). Expand only within every occupied row's chord.

Back has its own space

Left circle at (10,203), 60 x 60. One chevron, no caption, complete touch target, only with a previous route.

Rendering and touch agree

Use the same logical 0/90/180/270-degree transform. Never mirror text or rotate touch independently.

Controls become complete

Text actions have no filled cards or button borders; existing icons precede their captions. Reveal controls and touch together after title/body; preserve QR quiet zones.

Sources: display-geometry.md and docs/cody/layout.md. Artwork and complete hit bounds use the same circular admission.

Keep identity while routes evolve

Original screen IDs describe stable reference identities; PDF pages and storage indices are not IDs.

Network and pairing

04-09 describe network setup; 12-15 describe local Codex pairing and presence. 40-42 retain original decision/setup/recovery references. Device-first labels and BOOT entry are current.

Work and questions

15-20 and 18U describe connection/work/unavailable. 21-24 are read-only PR status; 25 is retired. 26/27 retain question/review identity; 31 requires recipient delivery; 32 is link loss.

Controls

Question rows are numbered and single-line, two visible at most; the full label/detail precedes Send. Standard actions use text-only captions. Full hit bounds and actual visibility gate touch.

Character

Cody provides the startup motion and touch reaction. Device status and controls have separate owners.

Sources: docs/cody/navigation.md, layout.md, runtime.md; cody-desktop/plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Original screen IDs remain stable

Identity reference / current labels and availability follow the source owners, not these original document names.

01-03	**Character boot**	VibeWare precedes Cody; the first-install birth introduction has its own pending state.
04-09 / 06-bis	**Network setup**	Installation QR, active provisioning QR, failure and valid Wi-Fi/IP.
10 / 36 / 11	**Options / Settings / Skin**	Device-first Options are current; Skin remains character design scope.
12-15	**Code / saved / searching / connected**	Local CCP pairing and current authentication are distinct states.
16 / 17 / 18 / 18U	**Idle / project / work / unavailable**	Cody renders on the device; activity needs exact source identity and freshness.
19 / 20A / 20B	**Reply ready / paused / chat ended**	A reply is not proof of success; no background event steals context.
21-24 / 25	**PR observations / retired log route**	Read-only status; exact head and complete check list; 25 remains retired.
26 / 27	**Notice / question / review**	Numbered choices, complete detail review, then explicit Send.
28 / 29 / 30	**Voice capture / transport / review**	Voice is profile-dependent; original transcript review 30 remains a future mode.
31 / 32	**Reply delivered / connection lost**	Recipient acknowledgement and actual link state; never infer success.
33 / 34	**Battery / charging notices**	Use current measured thresholds and health; no synthetic battery facts.
35A / 35B	**Sleep / Wake**	Power owner retains route; an artistic pose alone is not standby.
37 / 38 / 39	**Rig / diagnostics / provisioning debug**	Rig is Studio; diagnostic entry shares Debug/Release, with no facial-channel UI.
40 / 41 / 42	**Connection decision / Setup / recovery**	Original route identities retained; BOOT Options is the current user entry.

C01-C14 (cues) and IS01-IS04 (idle scenes) are document labels, not new routes. No cloud screen IDs are assigned before firmware integration.

Cloud relay: three separate identities

Architecture under implementation. No live service or cloud-capable firmware is claimed.

Owner

Signs in through the configured identity provider. Claims the intended device and grants one client access.

Dot / client

Uses a scoped access token or a separately issued connection key. The server resolves its allowed devices.

Cody

Initiates HTTPS polling. A separate revocable token is bound to its P-256 key through DPoP proof.

Private relay / identity + explicit grants + bounded delivery

A device ID is an address, not permission. Every send, poll and acknowledgement checks the authenticated principal and its live grant.

One relay instance / state, cookie protection keys and bounded logs on an OS-mounted SMB/Samba share

ASP.NET Core + Aspire AppHost/dashboard + OpenTelemetry; HTTPS polling first. Aspire uses its ordinary local tooling and temporary files. Relay storage uses the mounted share without Azure SDKs or provider APIs. Builds, deployment, mount behavior and firmware/Dot integration remain unverified.

Connect the person, the device and one client

Proposed cloud ceremony / a separate permission for each association.

1 / Device starts

After an explicit local action, Cody creates a pending enrollment bound to its device key and shows a short one-use code. No client grant exists yet.

2 / Owner claims

The owner signs into the relay's browser UI and enters the displayed code. The claim expires and is attempt-limited. Guessing an ID or finding an endpoint grants no access.

3 / Confirm on Cody

The physical confirmation must match that exact key-bound transaction and intended owner. The proposed firmware confirmation UI and protected credential storage remain to implement.

4 / Grant Dot access

The owner selects the already owned device and authorizes a particular client and scope. The server issues a separate connection credential or accepts the configured OAuth client grant. Other clients need their own grant.

The server proves control of enrolled credentials and a confirmed ceremony; it cannot continuously prove who physically holds the device.

A private service using a standard mounted share

Implementation target: ASP.NET Core .NET 10, Aspire and OpenTelemetry. Deployment is not part of this edition.

Relay persistence on SMB/Samba

One relay instance stores bounded JSON state, cookie protection keys and bounded operational logs on the OS-mounted share, with no local persistence fallback. The OS handles mount credentials. Local .env.local is configuration only. The relay uses no application database, Azure SDK or provider storage API.

HTTPS polling first

Cody initiates outbound HTTPS polling and acknowledges admitted events. The relay bounds queued content, expiry and duplicate identities. No inbound device port or WebSocket transport is required for the first version.

Aspire on Windows and Linux

Use normal Aspire AppHost orchestration and its dashboard. Ordinary local files and temporary storage used by Aspire and its tools are permitted. Relay business state, cookie protection keys and bounded service logs use the mounted share. Both host platforms remain targets; builds and runtime verification are pending.

Telemetry and mount gates

OpenTelemetry feeds the Aspire dashboard or a configured OTLP endpoint. The dashboard manages its own telemetry storage normally. Bounded relay logs persist on SMB. Exclude secrets and message bodies. Verify mount locks, durable flush, atomic replacement and disconnect/crash recovery. TLS and owner sign-in configuration remain pending.

Sources: docs/cody/navigation.md, layout.md, runtime.md; cody-desktop/plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Remaining work is explicit

No test, build, device operation or deployment is implied by document authoring.

Host service

Review identity-provider configuration, client/grant boundaries, token expiry/revocation, DPoP replay controls and the bounded queue. Build and runtime checks require their own authorized execution.

Mounted SMB/Samba storage

Verify locks, durable flush, atomic rename and disconnect/crash recovery on real Windows and Linux mounts. Relay state, cookie protection keys and bounded service logs must stay on the share without a local fallback. Aspire's ordinary local tooling and temporary files are permitted. Source settings are not runtime proof.

Firmware

Integrate outbound TLS, certificate/time handling, key protection, bounded polling and canonical event ownership. Budget buffers and nested stack use. Physical pairing confirmation and recovery need device evidence.

Dot and hosting

Use documented public integration points and independently authorize the agent. Configure the mounted share, TLS, owner identity provider and Aspire dashboard access, then verify real delivery. Normal AppHost/dashboard composition requires host verification. Azure is one host option, with no provider storage API dependency.

Sources: docs/cody/navigation.md, layout.md, runtime.md; cody-desktop/plugins/cody-codex-plugin/README.md and protocol/CCP1.md.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
03 October 2026 **ADDENDUM**	**A01 / Installation and device QR are different** Affected: Navigation originals 03, 12-13; Planning originals 04 and 23; screens 05-09 and original 06-bis. An installation QR opens the provisioning app listing. A separate session QR belongs to the active provisioning attempt. Credentials and Wi-Fi/IP are distinct states. Cancel and failure wait for actual cleanup; retry starts a new attempt. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.
04 October 2026 **ADDENDUM**	**A02-A04 / Stable routes, read-only PRs and real pairing** Affected: Navigation originals 14-16; Planning originals 24-26; screens 04-16, 21-25, 36 and 39. The Studio skin selector keeps screen 11 and its caller across first setup and Settings. PR screens 21-24 are read-only; 25 is retired. Counts require a complete current check list for the exact head. First-boot persistence and pairing success require actual owner results; Connected cannot be inferred from a route change. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.
05 October 2026 **ERRATA**	**Idle presentation is a design scope** Affected: Navigation original 19; Manga originals 03-04, 14-18; screens 04, 16, 35A/35B, 36-38. Original Idle 16 gained IS01-IS04 artistic scenes with a 20-40-second eligible wait, 3.2-second gesture and 40-second cooldown. The 35% closing, 16-22% reopening and 4.5% width pulse were subsequently corrected. These labels describe character design, not device measurements or current dashboard routes. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
06 October 2026 **ERRATA**	**Character values and VibeWare introduction** Affected: Navigation originals 23 and 26; Manga originals 19-27; screens 01-05, 16, 35A/35B. The retained character correction used 75% mouth closing, 16-24% reopening and 18% width motion; Stressed peak opening 0.24; cue offset +30/+40 px, 3.6x scale and 400-ms fades; Whistle width 0.5 replacing 0.42. The owner-supplied VibeWare floppy precedes content on cold boot/software reset. Former character boot phases and twofold artwork geometry are superseded by current device-first behavior. Evidence / limits: Windows rig illustrations and source review; no physical visual/audio observation was established. Build/check chronology is omitted.
09 October 2026 **ERRATA**	**Saved state and reversible setup** Affected: Navigation originals 02, 04, 16, 25, 28-29; Planning originals 27-29; screens 04-16, 35B, 36, 40-42. The original analysis omitted a configured network without a Codex association and a reversible setup entry. Screens 40, 41 and 42 identified those distinct routes. Saved pairing, network recovery and replacement consent remain separate. The current device-first entry is BOOT > Options > Connections, replacing the character-hold instruction. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
09 October 2026 **ERRATA**	**Standby recovery and malformed touch evidence** Affected: Navigation originals 28, 31-34; Planning originals 30-34; Service 14-18 / Connection 18-22; screens 04-06, 12, 35B, 41. A 90-second passive capture observed LAN/DHCP, Welcome inactivity return and standby, but no Connect Codex press. A separate capture recorded Yes at 16497 ms, Connect Codex at 16498 ms, then fifteen FF report bytes and ACK=FF at 17112 ms; expected ACK was AB. ESP_ERR_INVALID_RESPONSE stopped rendering. The correction separates an optional runtime acquisition error from rendering, interrupts gestures and requires a real release. Evidence / limits: These are retained measured failures. The FF hardware cause and corrected physical behavior were not established by those captures.
09 October 2026 **ERRATA**	**Action layout and touch admission** Affected: Navigation/Planning original 34; screens 05-15, 26-27, 35B, 36, 40-42; selected-multi-action.png and selected-single-action.png. The approved design uses two side-by-side rounded gradient cards, a centered third action, or one wide capsule. Earlier stacked-blue examples were superseded. Current captions are text-only; the older icon-left prescription is no longer the action contract. Question choices now use numbered single-line rows with full review before Send. Evidence / limits: Approved design references are not device captures.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 October 2026 **ERRATA**	**Automatic chat context and freshness** Affected: Navigation originals 35-38; Planning originals 35-38; screens 15-20, 18U, 26-27, 31-32. CCP follows the latest authorized UserPromptSubmit with exact chat/turn identity. Manual Choose/Pick a chat is removed. Background events cannot select context; a tab click is not a documented focus event. Pairing, authenticated presence, app presence and real work remain distinct. Eight seconds without packets expires device state; active work becomes unavailable after 120 seconds without another hook. Evidence / limits: The owner confirmed Connected on 10 October for the preceding pairing implementation. That observation does not prove later hooks or presentation.
10 October 2026 **ERRATA**	**Retain, replace, cancel and forget** Affected: Navigation/Planning originals 39-42, 48; screens 12-16, 32, 35B, 40-42. Separate pending and active records on both peers. Persist before confirmation and promote only after authenticated ACTIVE/COMMITTED. Cancel preserves the old operational link; a pending PC candidate requires a new visible code and explicit replacement. Forget removes Cody's CCP records, not the independent PC record. Temporary disconnection does not authorize re-pairing. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 October 2026 **ERRATA**	**Reply delivery and command outcomes** Affected: Navigation/Planning originals 43-46; Service 25-28 / Connection 29-32; screens 21-27, 31-32. Receipt is not recipient delivery. An immutable question ticket expires after 180 seconds including delivery acknowledgement. Timeout, offline, Back and Cancel never select an answer. Reply sent requires recipient acknowledgement. Restart retains settings; factory reset requires explicit confirmation and verified deletion. A command ACK proves admission, not reboot completion. Evidence / limits: Source/design evidence only; physical behavior was not established by this correction.
10 October 2026 **ERRATA**	**Boot artwork and current controls** Affected: Navigation/Planning originals 47-50; Manga original 02 and 28-31; screens 01-15, 36, 39-42. The complete 42-frame VibeWare artwork retains its authored 3.5-second dwell. The 10 October correction replaced the earlier title-free/twofold composition with a title, subtitle and 192 x 219 artwork at (137,164). It also removed the connection detour, clarified the five-minute pairing window and required successful settings write/readback. Current device-first routes are now integrated in the main body. Evidence / limits: Coordinates are source layout values. Schematics are neither simulator frames nor device captures.
11 October 2026 **ERRATA**	**English throughout** Affected: Navigation originals 01, 05-10, 29, 31, 34, 36, 38-46 and 53; Planning originals 01-02, 09-14, 16, 21-22, 39-46 and 53; Service 33 / Connection 37. Translate headings, diagrams, captions, prose and footers into English while preserving original correction dates, screen IDs, technical values and evidence limits. Evidence / limits: Document language and layout review only.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
12 October 2026 **CHANGE**	**Navigation within the documents** Affected: All atlas pages; Manga prior final register. Coordinated document identity, navigable contents and bookmarks retain original screen references when pagination changes. The quickstart keeps its own four instructional A5 pages. Evidence / limits: Document authoring only.
09 November 2026 **ERRATA**	**Current device and private cloud boundaries** Affected: Current Navigation/Planning bodies; former Navigation pages 03-19 and Planning pages 03-27; map and A5 instructions. Replace character-led current routes with the device-first dashboard, BOOT Options, current carousel order, Timer, Quick guide and explicit reset screens. Preserve character artwork as Studio/design material. Consolidate corrections into this register and remove accumulated build/code history. The private cloud service is under implementation; cloud firmware and Dot integration are pending. Evidence / limits: Read-only source review and PDF authoring. No firmware build, test, simulator, device operation or cloud deployment accompanies this edition.
13 November 2026 **ERRATA**	**Local timer retired** Affected: Navigation Options and standby; original ui-v1:timer. The local countdown screen, its Options entry, alarm and standby wake are removed. Other timekeeping and activity timers remain independent. Evidence / limits: Source review only; build, simulator and device verification remain pending.

Corrections register

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
13 November 2026 **ERRATA**	**Cody, flat actions and voice profile boundaries** Affected: Navigation/Planning current pages 3-8 and original screens 01-04, 26-29, 35A/35B and 40-42. The device source includes Cody, the first-install birth introduction and a saved Counter mode. Actions draw text and existing icons without filled cards. The Cody wake-word profile combines Sophia, speech synthesis and one-way audio handoff to the paired PC. Recipient transcription is not established. Quiet hours are available in device settings. Evidence / limits: Source review and document authoring only; visual, physical and voice-delivery acceptance remain separate.

Security

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
10 October 2026 **SECURITY**	**Fresh proof before presence or current data** Affected: CCP FIND / READY / COMMITTED; original screens 12-15, 18U, 26-27, 31-32. FIND alone cannot establish presence, redirect notifications or release current data. READY binds a fresh challenge to the observed device endpoint; COMMITTED proves the matching response. Distinct active/pending records, strict field bounds, nonces and one-use challenges preserve explicit admission. Firmware/plugin changes must agree; no legacy handshake fallback is claimed. Evidence / limits: Source-based correction; neither runtime adversarial behavior nor physical recovery is certified.
10 October 2026 **SECURITY**	**Bound work and keep residual risks explicit** Affected: Firmware UDP owner; PC discovery/pairing; ACTIVITY / TECH / EVENT; optional HTTP. Global/per-source ingress budgets and bounded receive slices precede expensive work. Discovery and pairing have finite packet/offer/work budgets. Broker network diagnostics are bounded; startup-only runtime.log retention remains separate. Six-character CCP transcripts permit offline guessing, and ordinary HMAC payloads are readable. Standard PAKE/high-entropy QR and authenticated encryption remain deferred. Optional plaintext device HTTP is a separate review scope. Evidence / limits: HMAC authenticates but does not provide confidentiality. No compromised-PC protection or production-security certification is claimed.

Security

Retained corrections and evidence; original dates, page references and screen IDs remain explicit.

DATE / TYPE	REVISION DETAILS AND SUPPORTING MATERIAL
07 November 2026 **SECURITY**	**Account projections stay bounded and authenticated** Affected: CCP ALLOWANCECAP / ALLOWANCE / ACCOUNT and later bounded account projection; Planning original 24; Communication core 03 and 09. The current endpoint, nonce and authenticated association bind account projections. Credentials, account identity email and message contents stay on the host. Source age, unavailable samples and separate account generations prevent stale or mixed-account graphs being shown as current. Evidence / limits: Source ownership only; this document does not establish live account login or end-to-end device delivery.
09 November 2026 **SECURITY**	**Cloud authorization is a separate trust boundary** Affected: New cloud relay concept; original local pairing screens 12-15 remain local. No new firmware screen IDs are assigned. Use owner sign-in, a key-bound device credential and an explicit owner/device/client grant. An ID, LAN pairing key or account label never authorizes arbitrary destinations. A short enrollment code is one-use and expires; owner claim and physical confirmation belong to the same transaction. HTTPS protects transport; DPoP binds the device token to its P-256 key. Revocation is checked server-side. Existing LAN UDP is not exposed publicly. Evidence / limits: Private implementation is in progress. Build, runtime/security review, Dot integration, firmware storage and physical confirmation are pending.