Installo CCP sul mio PC

Windows / plugin locale / Python disponibile come comando python.

1 / Registro la sorgente locale

Dalla radice del repository eseguo codex plugin marketplace add . per registrare il catalogo incluso. Installo e abilito CCP - Cody's Codex Plugin dal catalogo Cody local plugins.

2 / Collego il dispositivo

Uso il codice visibile su Cody. Se e' gia' associato scelgo Keep pairing; Pair again richiede consenso. Un'interruzione della LAN non richiede un codice nuovo.

3 / Attivita' oppure richiesta esplicita

Gli hook autorizzati seguono l'ultimo prompt reale con orchestrazione locale. Posso inviare avvisi/domande con MCP senza inventare hook o identita' di chat.

4 / Tengo il perimetro chiaro

Per CCP bastano Wi-Fi e IP sulla LAN. Le PR restano in sola lettura e le approvazioni native On your PC. Tengo separate le prove dai sorgenti e registro gli esiti in done.md.

Leggo, scelgo, invio

Screen 26 -> 27 -> 31 / una ricezione UDP non basta a dire consegnato.

26 / Codex needs you e Open

Mostro il contesto dichiarato, il titolo e l'avviso. La richiesta ha un ticket distinto e dura 180 secondi. Aprire o chiudere una vista non allunga la scadenza e non seleziona una risposta.

27 / Choose a reply

Uso due card affiancate; con tre aggiungo quella centrata sotto. Ogni scelta ha un ID stabile e un significato proprio. Back torna a 26 e conserva la domanda, senza inviare.

27 / Review choice

La scelta apre un riepilogo con descrizione e capsula Send. Back mi riporta alle opzioni. Dopo Send tengo la scelta ferma e mostro Sending reply. Non aggiungo un quarto pulsante sotto tre card.

31 / Reply sent dopo consegna

L'ACK UDP received lascia Waiting for Codex: CCP ha registrato la scelta. Solo con delivered mostro Reply sent e Delivered to Codex; Done riprende il contesto precedente 17, 18 o 16.

Startup: two saved decisions

Local Wi-Fi/IP first. Then the retained Codex pairing. Public Internet is not required.

1 / No saved Wi-Fi profile

A valid absent-profile observation opens 04 > 05 > 06 > 07 > 09. Debug may show 39 before 09. Continue: 10 > 36 > 11 (skin), then the Codex decision.

2 / Saved Wi-Fi; waiting for the network

42 / No connection keeps the profile while the Wi-Fi owner reconnects. Network setup reopens 04-09; Later returns to Idle. Invalid/stale data shows UNAVAILABLE.

3 / LAN ready; no saved Codex pairing

40 / Connect Codex? Yes starts the code on 12. No returns to 16 / Idle without a settings write or CCP request. The next boot may ask again.

4 / LAN ready; saved Codex pairing

Adopt the saved attempt and search on 14. Only authenticated READY enters 15. A retained identity alone never means the PC is connected.

Reopen setup from Cody

Hold the visible character still for 1.5 seconds. No button-based factory reset is added.

41 / Setup

Connect Codex opens a fresh display-code attempt. Network setup reopens 04-09. Left Back returns to Idle. Opening or leaving the menu erases no Wi-Fi, skin or pairing.

Keep the gesture deliberate

Available from stable Idle, PC search/connected and terminal CCP errors. Moving more than 12 px, a sample gap over 250 ms, rotation or a lifecycle interruption cancels the hold. Busy work and active provisioning are excluded; release before choosing.

PWR / existing policy

Single: standby/wake; active Debug defaults to screenshot countdown. Long release: standby. Debug double within 500 ms, or a continuous 3-second hold: restart preserving data.

BOOT / existing policy

Short: restore a dim/sleeping panel first, otherwise toggle fullscreen/status arcs. Hold 3 seconds: Debug restart; Release has no firmware reset action. Saved Wi-Fi and CCP survive restart.

CCP: current local installation

This checkout provides a local marketplace. The original ZIP leaflet remains a packaging concept.

1 / Register the checkout

Use this repository's .agents/plugins/marketplace.json. The catalog is Cody local plugins; the package is CCP - Cody's Codex Plugin. Keep the checkout in its current location.

2 / Install, enable, new chat

Open the repository installation link below in Codex desktop. Install and enable CCP, then start a new chat. Python 3 must be available as python. Codex starts the MCP script.

3 / Pair from Cody

At startup, choose Yes on 40; alternatively hold Cody and select Connect Codex on 41. Keep the six-character code on 12 visible. In the CCP-enabled chat, ask to pair Cody using that exact code.

4 / Confirm and reconnect

After authenticated completion, 13 > Let's go > 16 (10 active seconds) > 14 > 15. On a later boot with a valid saved link, go straight to authenticated search on 14. Keep Codex/CCP awake on the same LAN; screen 15 certifies CCP presence, not chat/task transport.

Open CCP installation in Codex

Errata and corrections

Revision date: 09 October 2026 / CODY-SETUP-20261009

Original analysis gap

The initial analysis omitted startup with Wi-Fi already configured but no saved Codex pairing, and did not define a reversible user entry to setup. This was an original analysis gap (buco di analisi iniziale), now addressed in source.

Affected original pages and screen IDs

Original page 01 (ZIP installation concept) and page 02 (pairing entry and reconnect); screens 11-16. The original two-sided leaflet is retained.

Corrections

Add 40 / optional Yes-No Codex choice, 41 / character-hold Setup, and 42 / reconnect wait. 09 means local Wi-Fi/IP; 11 selects a skin. No/Later performs no persistence or new CCP request. Saved pairing returns to 14 and requires authenticated READY for 15. PWR/BOOT do not clear pairing.

Preservation

All 2 previous pages, earlier corrections, bookmarks and unrelated content are retained. This dated addendum supersedes only the cited startup/setup/install statements; the original numbering stays stable.

Evidence and limits

Firmware source implementation and static integration review completed. PDF pages rendered and visually reviewed. No firmware tests, validation scans, configure/build/size, simulator execution, device pairing/input, flash or erase accompanied this revision. Runtime validation is pending.

Setup after standby

Hold Cody for 1.5 seconds to choose Network setup or Connect Codex.

04-06 / Escape the network loop

After inactivity, Welcome previously sent its first touch straight back to Let's pair. Welcome now opens 41 on a stationary tap release. A character hold also opens 41 from timeout Welcome, Let's pair or the installation QR page when no operation is busy.

35B / Wake, then hold

A finger already down during wake starts its 1.5-second hold only on a fresh acquired sample with the restored visible character. Hidden standby/wake time never counts. Movement over 12 px, report gaps over 250 ms or rotation cancel the hold. Release before choosing.

41 / Two explicit destinations

Upper Connect Codex opens 12 and its six-character CCP code using the local Wi-Fi/IP connection. Lower Network setup explicitly opens 04-09. No Internet probe is required. Active provisioning, worker admission and pending cancellation block menu access.

Errata and corrections

Revision date: 09 October 2026 / recovery correction

Original analysis gap

The first analysis did not reconcile the legacy Welcome timeout/touch path with reopening setup after standby. This was an original analysis gap (buco di analisi iniziale).

Affected pages and screens

Previous setup addendum: page 4. Affected screen IDs: 04, 05, 06, 12, 35B and 41. Earlier dated errata remain intact.

Corrections

Timeout Welcome tap release and stationary character holds on resting 04-06 reopen 41. A hold spanning wake starts only after visible restoration. Connect Codex goes to 12; Network setup goes to 04-09. Busy work and pending cleanup cannot be bypassed.

Evidence and limits

A user-authorized 90-second passive serial capture confirmed LAN/DHCP, Welcome inactivity return and standby. No Connect Codex press occurred in that capture; the initial wrong-selection report remains unresolved. The correction has static source review; corrected physical behavior still needs observation.


Preservation

All 6 preceding pages, prior errata and unrelated content are retained. This addendum supersedes only the cited escape/gesture behavior. Saved credentials are not erased.

Cody action language

IMPORTANT UI DECISION / approved 09 October 2026 / binding for future screens



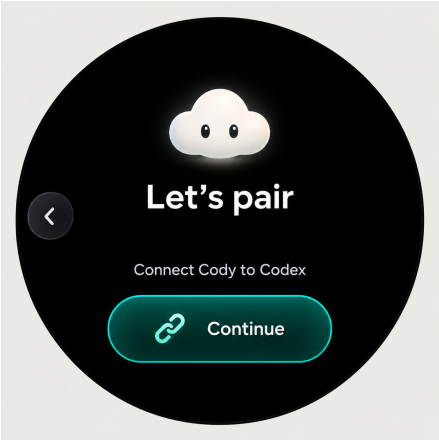

Layout rule

Two actions: rounded cards side by side. Three: the same pair plus one centered action below. One: a wide centered capsule with its icon left of the label.

Shared visual language

Dark restrained gradients, thin semantic borders, white labels and action icons. Teal: affirmative/Codex; blue: network; graphite: No/Later/Options; amber: Retry/Cancel.

Circular geometry

Keep Back separate at the left. Share rendering and touch bounds in every orientation. QR pages keep the quiet zone and use the compact single-action variant.

Options and touch continuity

Setup keeps Network setup and Connect Codex distinct. Options opens screen 10.

41 / Setup

Left card: Connect Codex. Right card: Network setup. Centered third action: Options. Options opens 10 / Make it yours, then 36 and 11 / skin. Done returns to Setup; Back retraces this local preferences path. No network or Codex association is erased or implicitly started.

40 / Connect Codex? and 42 / No connection

Yes/No and Network setup/Later are side by side, with purpose-specific icons and colors. Their existing explicit backend admission stays intact. Screen IDs 05-15 and 36 share the action styling where an action is present.

Observed freeze / original cause

An authorized 90-second reset/capture recorded Yes at 16497 ms, entry to Connect Codex at 16498 ms, then a CST9217 report with fifteen FF bytes and ACK=FF at 17112 ms (expected AB). ESP_ERR_INVALID_RESPONSE stopped the renderer. LAN/IP was ready.

Scoped runtime correction

The touch owner still rejects malformed reports and publishes the real error. After startup only, that acquisition error is optional for rendering. Discard queued gesture reports, cancel the gesture and require a real acquired release before another press. No release is invented. The same acquisition error can mean an I2C NACK; its origin is not inferred. Startup, other acquisition errors, locks and route failures remain terminal.

Evidence boundary

Native source integration and approved mockups are documented here. The underlying cause of the FF report and corrected physical touch/standby behavior remain unverified. A successful build/flash alone does not establish those outcomes.

Errata and corrections

Revision date: 09 October 2026 / important UI decision and touch correction

Important design decision

The user approved the two-column pair plus centered third action, and the wide single action with icon to the left. These are binding layouts from this revision onward. Gradients, icons and semantic colors are required across Cody screens.

Affected original material

Original page 01 (ZIP installation concept) and page 02 (pairing entry and reconnect); screens 11-16. The original two-sided leaflet is retained. Also affected: screens 05-15, 35B, 36 and 40-42. Earlier stacked-blue control illustrations are superseded only in their action layout/styling.

Original analysis gaps

The initial analysis omitted Options re-entry and did not distinguish an optional malformed runtime touch report from renderer failure. This was a buco di analisi iniziale. Options now opens 10 and returns to Setup after preferences/skin.

Corrections and limits

Yes/No become horizontal and semantic. The measured invalid touch report retains its original error while rendering continues with interrupted gestures. Hardware FF root cause and physical corrected behavior remain open.

Preservation

All 8 preceding pages, earlier errata and unrelated content remain unchanged. Approved images are design references, not physical device screenshots.

Follow one Codex chat

10 October 2026 / CCP 0.3 / screens 16-20 and 32

Codex hooks	CCP runtime	Cody snapshot

Install and trust

Update CCP to 0.3. Review and trust its hooks in Codex. Installation alone does not trust them. The hidden PC runtime is shared by open chats; the saved device pairing remains intact.

Choose the chat

Send a prompt, list observed sessions, then explicitly select one session ID and paired Cody. Supply a short ASCII project label. Another chat cannot replace that selection. Runtime restart requires selection again.

Read actual activity

17: project active. 18: working, editing or running. 19: response ready, not task success. 20A: paused or awaiting approval. 20B: session ended, then 16 after five active seconds. 32: paired PC lost.

Freshness and scope

The device receives authenticated snapshots every two seconds. Missing packets expire after eight seconds; active hook observations expire after 120 seconds. UNAVAILABLE is explicit. Messages, answers, PR data, branch acquisition and voice transcription remain future work. Physical behavior is pending.

Errata and corrections

Revision date: 10 October 2026 / authenticated chat activity

Affected original material

Original pages 1-2 and setup addendum page 5; installation and screen 15.

Analysis gap corrected

Screen 15 originally proved PC presence only. The initial analysis omitted explicit chat selection, shared runtime lifetime and event freshness. This was a buco di analisi iniziale; it is now addressed in source.

Contract and UI

CCP 0.3 adds metadata-only hooks, exact session selection and nonce-bound ACTIVITY messages. The canonical snapshot owns validity and errors. 18U adds the unavailable state. Setup re-entry preserves the selected context.

Evidence and limits

The user confirmed Connected on 10 October after real pairing. That evidence belongs to the previous firmware and CCP 0.2. New code is implemented; host checks, hook trust/autoload and physical 0.3 behavior are not established here. A response-ready event is never reported as task success.

Preservation

All 11 previous pages and earlier errata remain unchanged. The approved gradient/icon action layouts remain binding. These diagrams describe architecture, not captured device pixels.

Addendum / pairing conservato

Registro della decisione / 10 ottobre 2026 / screen 04-16, 35B, 36 e 40-42.

Primo avvio / Dispositivo gia' configurato

Senza Wi-Fi salvato apro 04-09. Con credenziali ma senza IP uso 42. Con LAN e senza pairing offro 40. Con un record valido riprendo 14-15, senza verificare Internet.

Setup / Consenso alla sostituzione

Apro 41 tenendo premuto il personaggio per 1,5 secondi. Con un pairing salvato mostro Already paired: Keep pairing, Pair again oppure Forget. Retry riprende la ricerca senza codice nuovo.

Pairing / Presenza / Attivita'

Con 13 confermo il pairing. Let's go cerca subito il PC. Su 15 confermo CCP e attendo il prompt reale. Gli hook seguono la sua chat automaticamente: ho eliminato la scelta manuale.

Options / Scelte locali

Apro Make it yours da Options e riutilizzo Settings e Skin. Torno al chiamante corretto. Tengo separati preferenze, sostituzione del PC e qualsiasi cancellazione esplicita.

Addendum / casi di recupero

Screen 14-16, 18U, 32, 35A/35B e 42 / conservo l'identita' salvata.

LAN attiva; Internet giu'

Uso ancora il link locale con CCP. Codex puo' perdere i servizi online separatamente. Tengo questa situazione distinta da un pairing fallito.

LAN o PC assenti

Conservo le identita', attendo e riprovo sulla rete locale. Posso tenere premuto Cody e aprire Setup. Per Retry ordinario non serve un altro codice.

Standby o aggiornamento

Conservo il pairing e recupero la presenza autenticata. Il normale flash preserva NVS; cancellazione o storage invalido richiedono un'altra decisione.

Connected senza attivita'

Controllo autorizzazione degli hook ed esecuzione locale, poi invio un prompt reale. Non fabbrico eventi o record di fiducia per far sembrare tutto a posto.

Addendum / conferma e reset

Screen 12, 13, 40 e 41 / conservo rete, skin, preferenze e log.

Due candidati, attivi conservati

Sul PC salvo il candidato DPAPI prima di PAIR; sul Cody uso ccp_pending. Tengo separati i vecchi attivi. CONFIRM oppure READY fresco provano il PC e consentono commit e rilettura sul Cody.

Chiudo con una prova del commit

Il PC promuove dopo ACTIVE o COMMITTED autenticati, mai per il solo FIND. Dopo ogni READY valido Cody ripete COMMITTED con il nonce corrente: recupero riavvii e ACK persi senza un altro codice.

Cancel / Chiudo il tentativo

Dal codice pronto scarto il candidato Cody. Conservo il vecchio link operativo; sul PC il candidato resta pending. Per sostituirlo richiedo nuovo codice e replace_pending:true esplicito. Una prova con la vecchia chiave non autorizza la cancellazione.

Forget / Solo il pairing Codex

Confermo Forget pairing con Go back / Forget e Only Codex is reset. Cancello solo i record CCP di Cody; il PC conserva il suo. Dopo l'esito reale mostro Unpaired / Pairing removed, poi Done -> Setup.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-RETAINED-FLOW-20261010

Pagine originali 1, 2

Ho riscritto fronte e retro con installazione locale, hook e screen 12-15/41. Ho superato il concetto ZIP e la scelta manuale della chat.

Screen 12-15, 40 e 41

Let's go cerca subito. Already paired offre Keep pairing, Pair again e Forget. Retry recupera il PC salvato; Cancel chiude il candidato. Un normale aggiornamento conserva il link.

Buco di analisi iniziale

Avevo confuso commissioning, riconnessione e attivita' e omesso il consenso alla sostituzione. Ho corretto il flow: qui il buco lo chiudo, non lo nascondo.

Storico ed evidenza

Conservo verbatim addenda ed errata precedenti. Le pagine attuali superano le istruzioni in conflitto. Tengo separate modifiche scritte e prove fisiche ancora da eseguire.

Addendum / notifiche e decisioni

Revisione 10 ottobre 2026 / screen 26, 27 e 31.

26 / Codex needs you e Open

Mostro il contesto dichiarato, il titolo e l'avviso. La richiesta ha un ticket distinto e dura 180 secondi. Aprire o chiudere una vista non allunga la scadenza e non seleziona una risposta.

27 / Choose a reply

Uso due card affiancate; con tre aggiungo quella centrata sotto. Ogni scelta ha un ID stabile e un significato proprio. Back torna a 26 e conserva la domanda, senza inviare.

27 / Review choice

La scelta apre un riepilogo con descrizione e capsula Send. Back mi riporta alle opzioni. Dopo Send tengo la scelta ferma e mostro Sending reply. Non aggiungo un quarto pulsante sotto tre card.

31 / Reply sent dopo consegna

L'ACK UDP received lascia Waiting for Codex: CCP ha registrato la scelta. Solo con delivered mostro Reply sent e Delivered to Codex; Done riprende il contesto precedente 17, 18 o 16.

Addendum / PR solo in lettura

A03 resta in vigore / screen 21-24; 25 ritirato.

21 / PR pending

Osservo soltanto il PR indicato. Conservo l'esatto head dello snapshot esplicito fornito da Codex. Non uso Stop come prova dei check e non offro merge, approve, close, rerun o comment.

22 / Checks running e Checks passed

Mostro numeri solo da un elenco completo e attuale sullo stesso head. Checks passed non ha pulsanti: attendo la fine della narrativa e tre secondi, poi torno al lavoro.

23 -> 24 / View failures

L'unica azione apre i nomi reali dei check falliti: al massimo sei, fino a 48 caratteri ASCII ciascuno. Un input non rappresentabile viene rifiutato esplicitamente; non taglio nomi e non invento totali.

24 sola lettura / 25 ritirato

Mostro tre nomi per pagina, fino a due righe ciascuno; scorro verticalmente e tengo Back laterale. Non offro View log o righe selezionabili. Log, diagnosi e correzioni restano sul PC.

Addendum / consegna e comandi

Screen 31, 32 e nuovo setup / distinguo accettazione e risultato.

received non e' delivered

Il poll restituisce scelta e answer_id. Un poll successivo con acknowledge_answer_id uguale prova la ricezione del chiamante: solo allora passo a delivered e allo screen 31.

Scadenza e consegna incerta

I 180 secondi valgono anche in received. Se ho gia' ammesso Send mostro Reply unconfirmed: puo' mancare solo l'ACK. Prima di Send uso Request expired. Nessun Retry o ACK tardivo riapre la domanda.

Riavvio esplicito / dati conservati

Scrivo 'resetta il device codice 043533477' nel messaggio corrente: nove cifre, zero compreso. E' un controllo anti-equivoco, non una password; non lo completo dai documenti. Uso il peer paired LAN, dati conservati. ACK = accepted; boot = nuova presenza.

Factory reset / primo setup

Con 'formatta cody 043533477' elimino preferenze, Wi-Fi e pairing; conservo firmware, asset e SD. ACK indica ammissione. Riavvio solo dopo cancellazione verificata; poi riparto dal setup Wi-Fi. Un errore resta visibile e non avvia il reboot.

Errata and corrections

Data revisione: 10 ottobre 2026 / CODY-NOTIFICATIONS-20261010

Pagine originali 1, 2

Ho aggiornato le due pagine iniziali: installazione locale, richieste esplicite e flow 26/27/31. Conservo lo storico precedente.

Screen 21-27 e 31-32

Ho applicato A03: PR in sola lettura e 25 ritirato. Ho rimosso View log e il vecchio elenco verticale. Ora 27 ha card e riepilogo Send; 31 richiede delivered dopo l'ACK del destinatario.

Buco di analisi iniziale

Avevo lasciato ambigui ricevuta, consegna e scadenza, oltre a illustrazioni PR superate. Li separo con ticket, received/delivered e 180 secondi. Timeout e offline non scelgono risposte.

Storico, comandi e prove

Ho separato riavvio e factory reset: il primo conserva i dati, il secondo cancella la configurazione per tornare al setup. ACK indica ammissione. Conservo storico ed errori reali; gli esiti host e fisici sono in done.md.