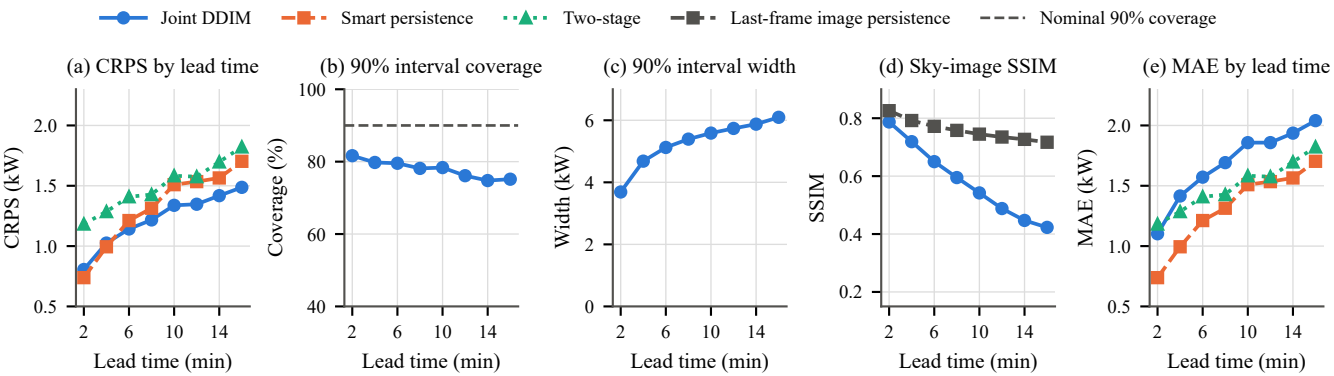
Joint DDIM
Smart persistence
Two-stage
Last-frame image persistence
Nominal 90% coverage
(a) CRPS by lead time
CRPS (kW)
2.0
1.5
1.0
0.5
2
6
10
14
Lead time (min)
(b) 90% interval coverage
Coverage (%)
100
80
60
40
2
6
10
14
Lead time (min)
(c) 90% interval width
Width (kW)
6
4
2
0
2
6
10
14
Lead time (min)
(d) Sky-image SSIM
SSIM
0.8
0.6
0.4
0.2
2
6
10
14
Lead time (min)
(e) MAE by lead time
MAE (kW)
2.0
1.5
1.0
0.5
2
6
10
14
Lead time (min)