




PUT BIG COPPER PLANES UNDERNEATH FET, SEE DATASHEET




MCU

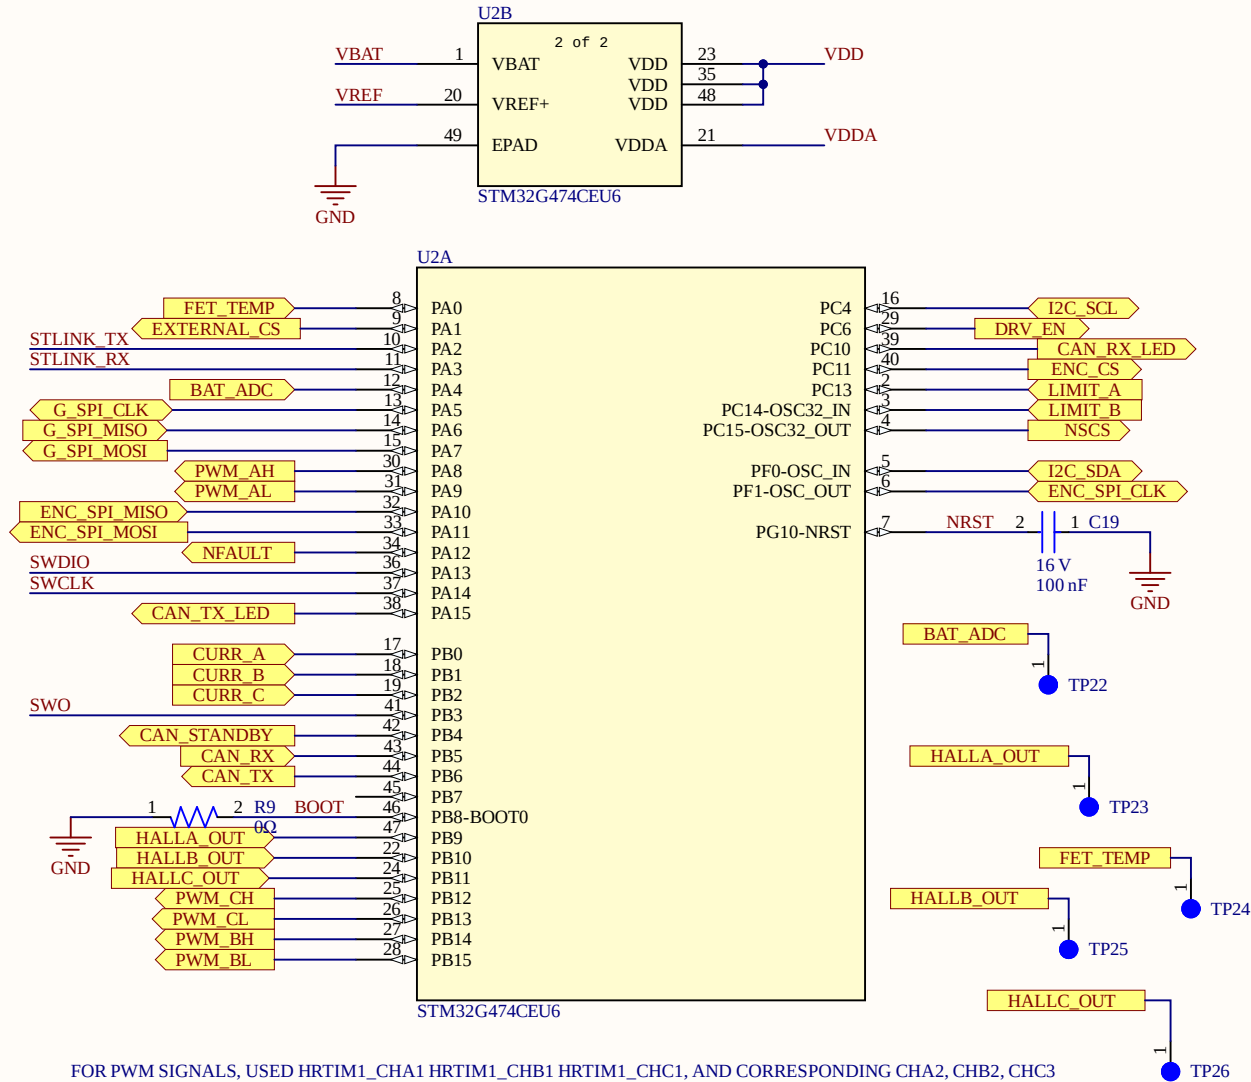


EXTRA FILTERING

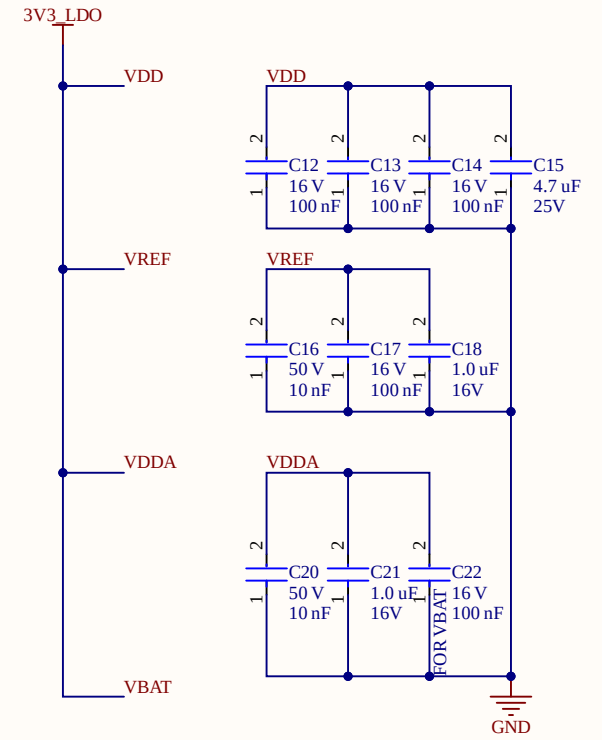

SW FLASHING HEADER

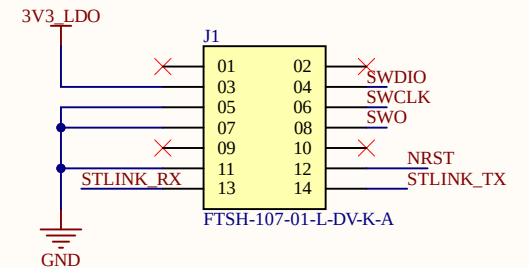


PGOOD LED

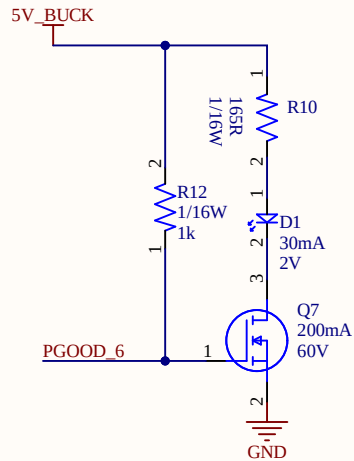


ENABLE


$100k / (2.15M + 100k) * 48V = 2.13V$
ABOVE ENABLE THRESHOLD

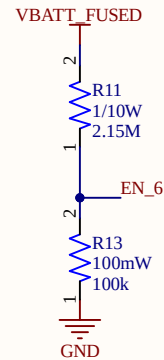


EXTRA FILTERING

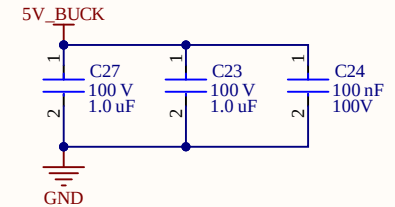


FUSE

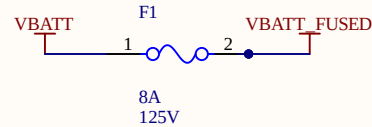


TEST POINTS




5V BUCK CONVERTER - LDO POWER

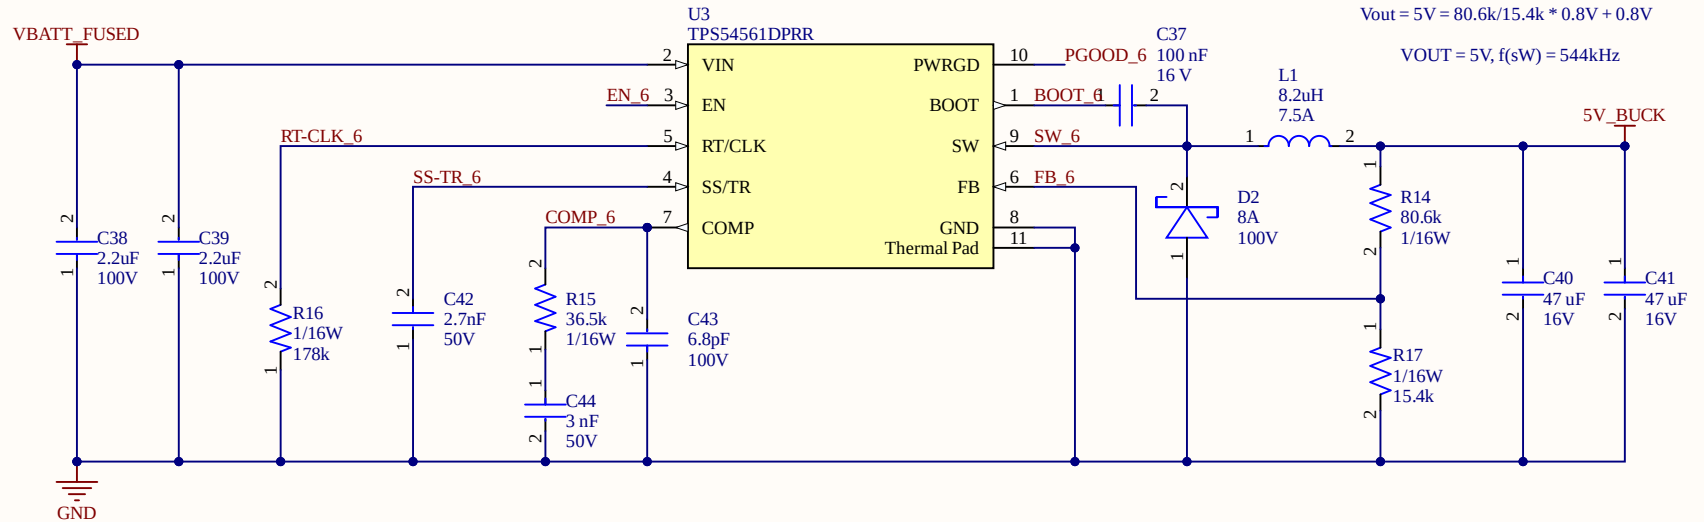


3V3 LDO

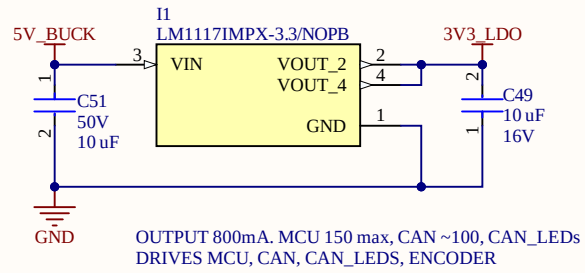


EXTRA FILTERING

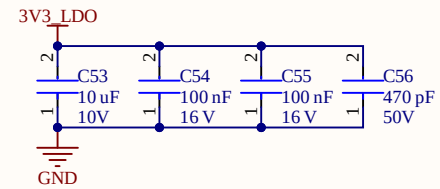


TEST POINTS




PGOOD 3V3

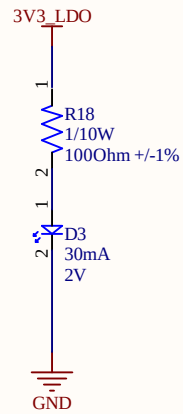


CAN TRANSCEIVER

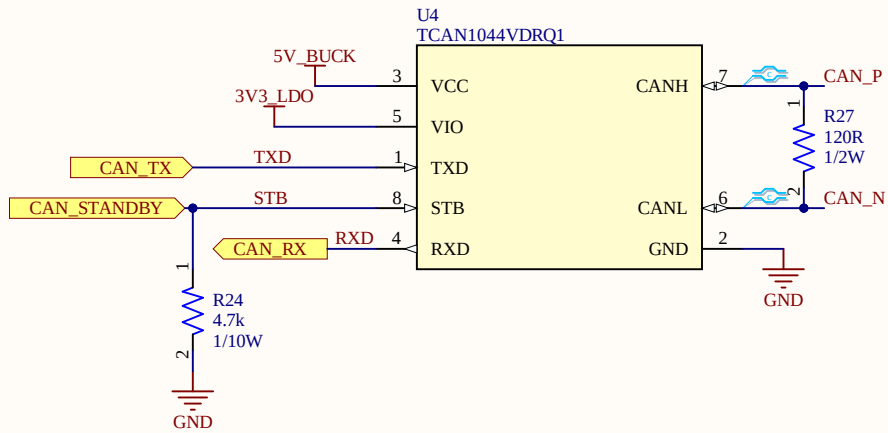


CAN LEDS

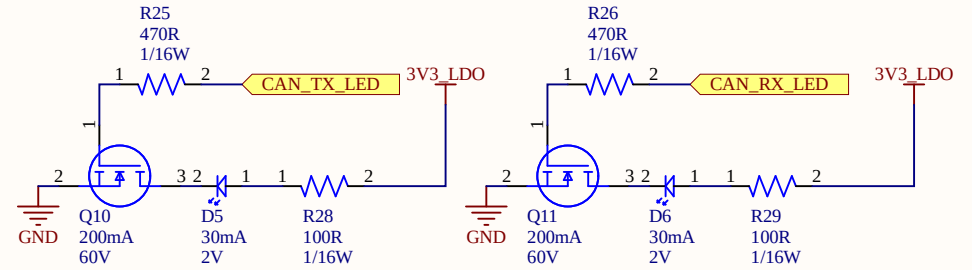


CAN 1




CAN 2



FILTERING




ABSOLUTE MAGNETIC ENCODER

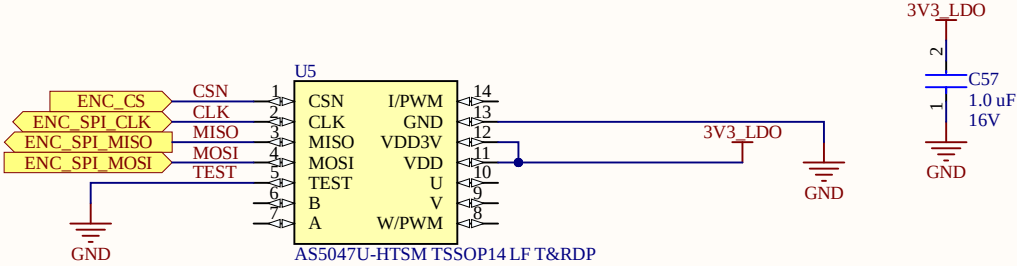


OTHER LINES FOR ABI/UVW COMMUNICATION PROTOCOL


BATTERY REVERSE POLARITY

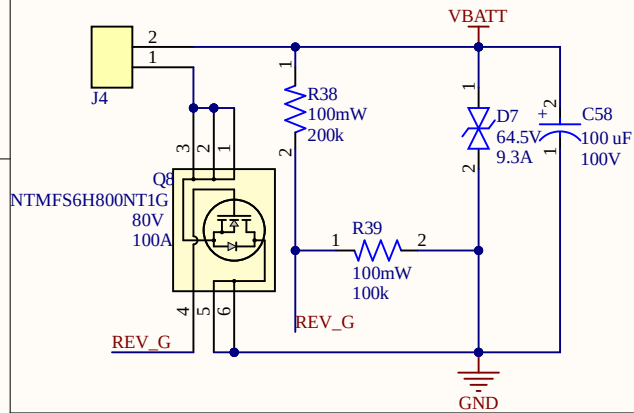


SENSOR CONNECTOR

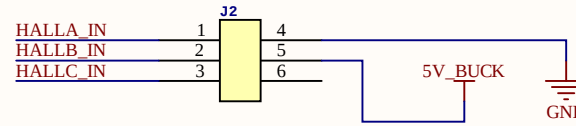


MOTOR CONNECTOR

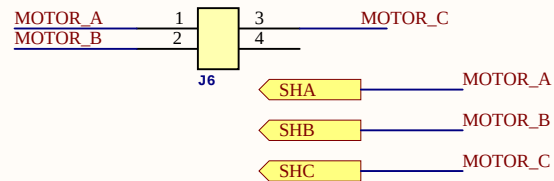


BATTERY VOLTAGE

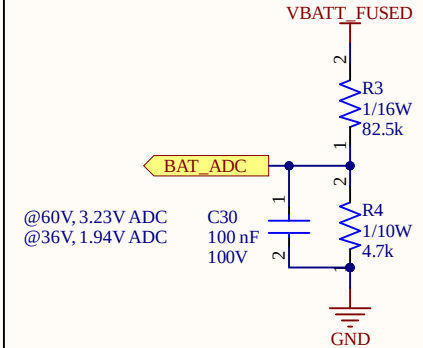

HALL FILTERING

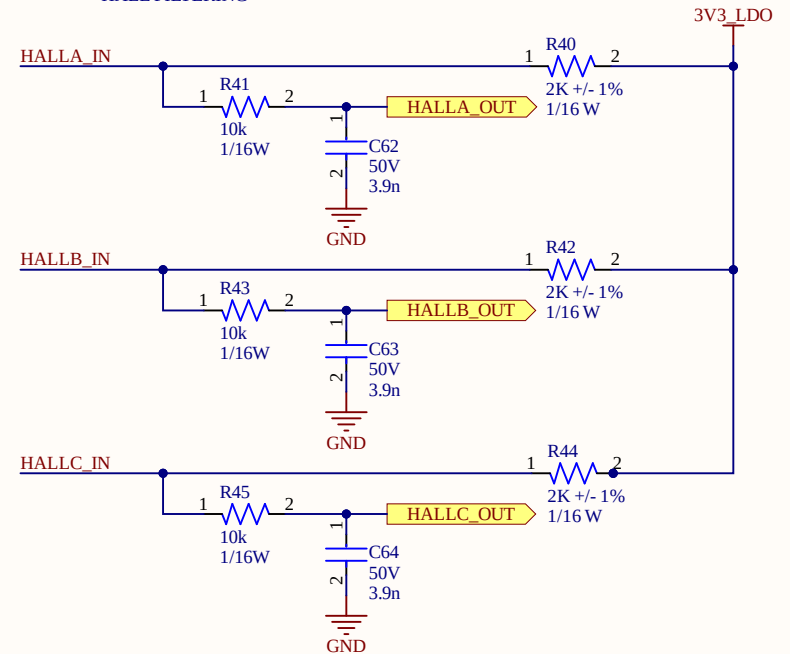


LIMIT SWITCHES

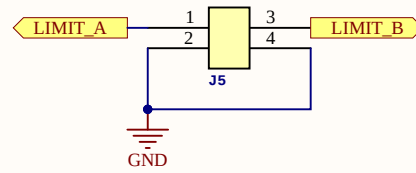

MOTOR TEMP CALCULATIONS:
TOTAL THERMAL RES: 2.06K/W
WINDING THERMAL TIME CONSTANT: 9.19s
30A W/ NO EMF: 218.5 C ABOVE STARTING
25 C TO 125 C IN 5.6s USING EXP TIME CONSTANT
LIMIT IN SOFTWARE FOR 2-3s

EXTERNAL ENCODER I2C PORT

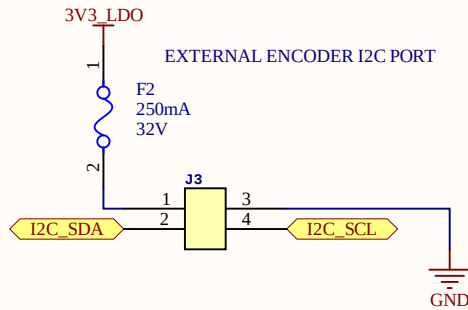

EXTERNAL ENCODER SPI PORT

