



Pipes

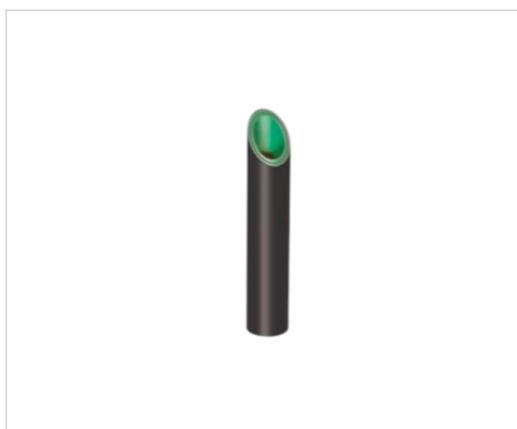

K-Fiber UV Pipe PP-R SDR 7,4

„K-Fiber UV Pipe PP-R“ SDR 7,4 — S 3,2 (20° C/2,0 MPa — 60° C/1,0 MPa), length 4 meter

Code	D	DN	Di	S min.	Pack.	Weight (kg/m)	Water capacity (l/m)
AQ200PFUV20	20	15	14.4	2.8	100	0.16	0.16
AQ200PFUV25	25	20	18.0	3.5	100	0.25	0.25
AQ200PFUV32	32	25	23.2	4.4	60	0.39	0.42
AQ200PFUV40	40	32	29.0	5.5	40	0.59	0.66
AQ200PFUV50	50	40	36.2	6.9	20	0.91	1.03

AQ200PFUV63	63	50	45.8	8.6	20	1.45	1.63
AQ200PFUV75	75	-	54.4	10.3	12	2.06	2.31
AQ200PFUV90	90	65	65.4	12.3	8	2.94	3.32
AQ200PFUV110	110	80	79.8	15.1	4	4.36	4.97
AQ200PFUV125	125	90	90.8	17.1	4	5.61	6.47
AQ200PFUV160	160	115	116.2	21.9	4	9.09	10.60

ORDER

Another categories



PIPES




TRANSITION FITTINGS

certification

We are ISO certified




ISO certificate 9001 14001 50001



DVGW System approval 28.12



KIWA Hygienic Test GB Fiber

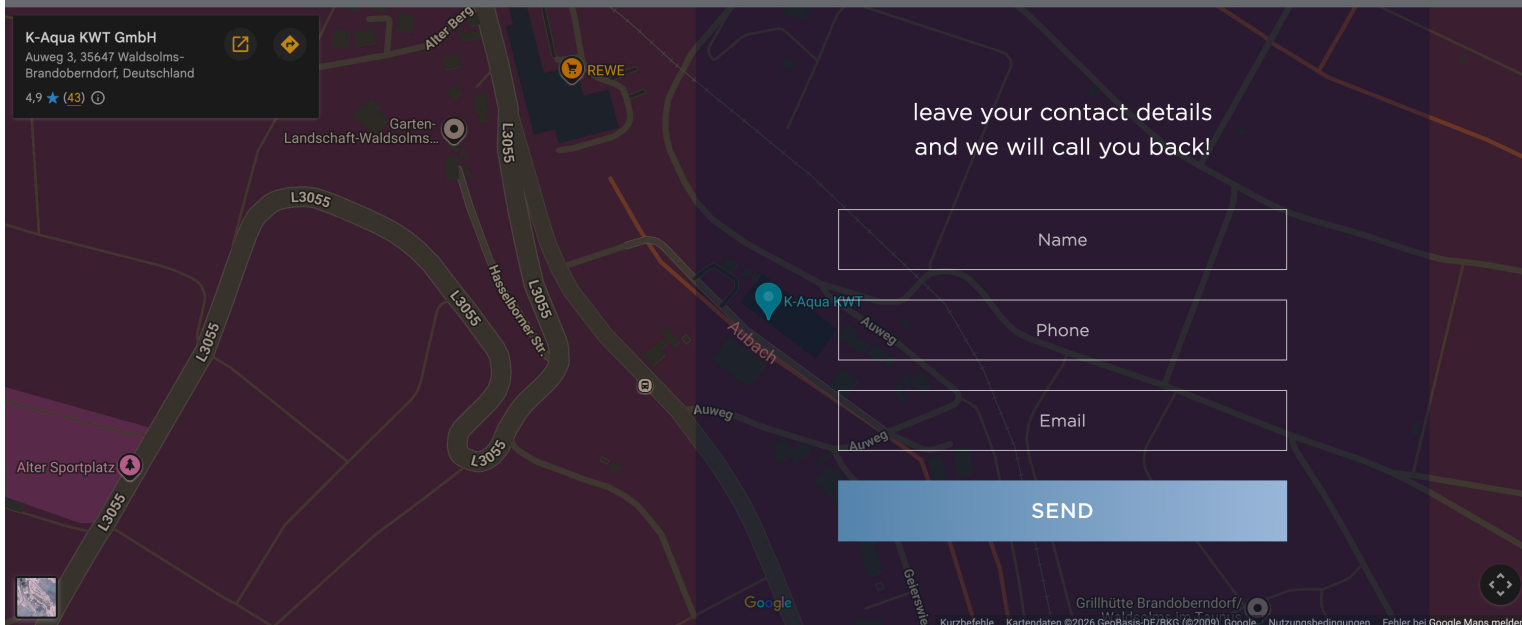[HOME](#)[PRODUCTS AND SERVICES](#)[ABOUT US](#)[NEWS](#)[CAREER](#)[CONTACTS](#)[DOWNLOAD](#)[Privacy policy](#)