



Pipes

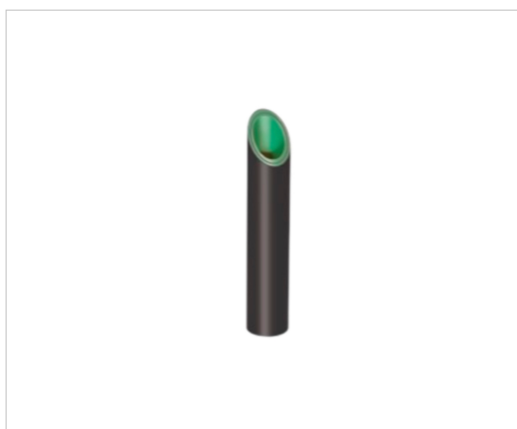

K-Fiber UV Pipe PP-RCT SDR 7,4

„K-Fiber UV Pipe PP-RCT“ SDR 7,4 — S 3,2 (20° C/2,0 MPa — 70° C/1,0 MPa), length 4 meter

Code	D	DN	Di	S min.	Pack.	Weight (kg/m)	Water capacity (l/m)
AQ200FUV20	20	15	14.4	2.8	100	0.16	0.16
AQ200FUV25	25	20	18.0	3.5	100	0.25	0.25
AQ200FUV32	32	25	23.2	4.4	60	0.39	0.42
AQ200FUV40	40	32	29.0	5.5	40	0.59	0.66
AQ200FUV50	50	40	36.2	6.9	20	0.91	1.03

AQ200FUV63	63	50	45.8	8.6	20	1.45	1.63
AQ200FUV75	75	-	54.4	10.3	12	2.06	2.31
AQ200FUV90	90	65	65.4	12.3	8	2.94	3.32
AQ200FUV110	110	80	79.8	15.1	4	4.36	4.97
AQ200FUV125	125	90	90.8	17.1	4	5.61	6.47
AQ200FUV160	160	115	116.2	21.9	4	9.09	10.60

ORDER

Another
categories



PIPES




TRANSITION FITTINGS

certification

We are ISO certified




ISO certificate 9001 14001 50001



DVGW System approval 28.12



KIWA Hygienic Test GB Fiber

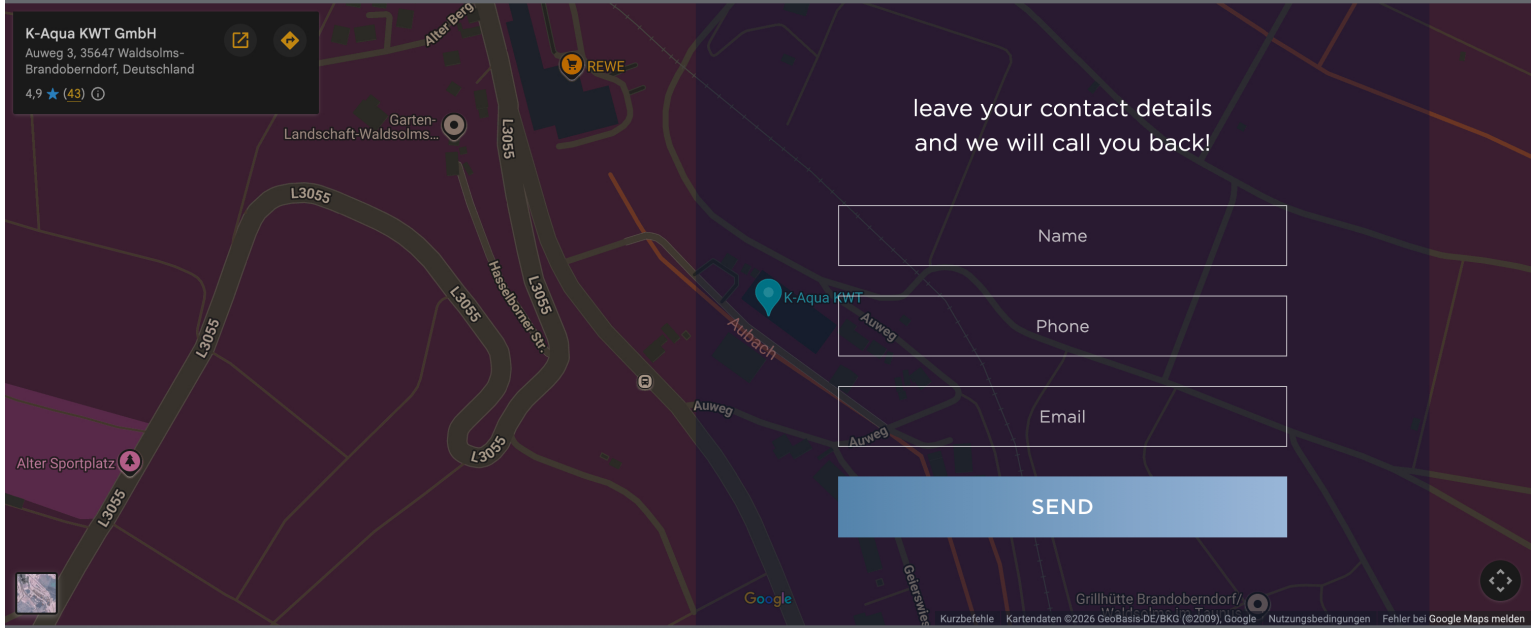[HOME](#)[PRODUCTS AND SERVICES](#)[ABOUT US](#)[NEWS](#)[CAREER](#)[CONTACTS](#)[DOWNLOAD](#)[Privacy policy](#)