





* Tüm ölçüler aksi belirtilmedikçe mm olarak verilmiştir.
(All units are in mm unless otherwise specified.)
* Parçalarda çapak kalıntısı olmayacaktır. (Part(s) free of burs)
* Genel Tolerans (General Tolerance) : ±0.2
Açısal (Angular) : ±1°

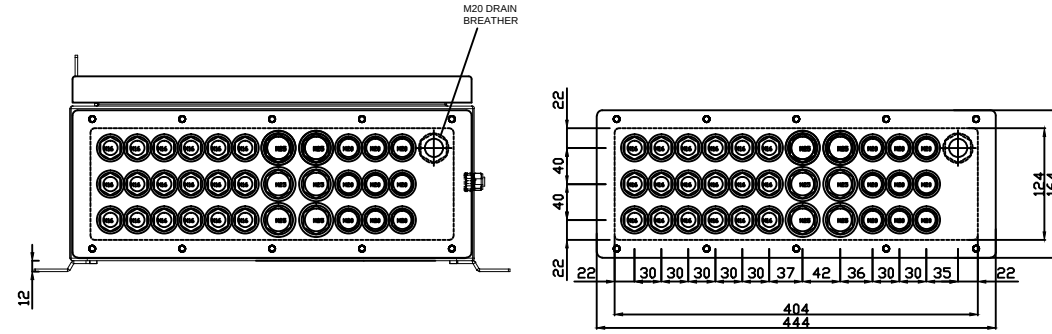

BOTTOM VIEW

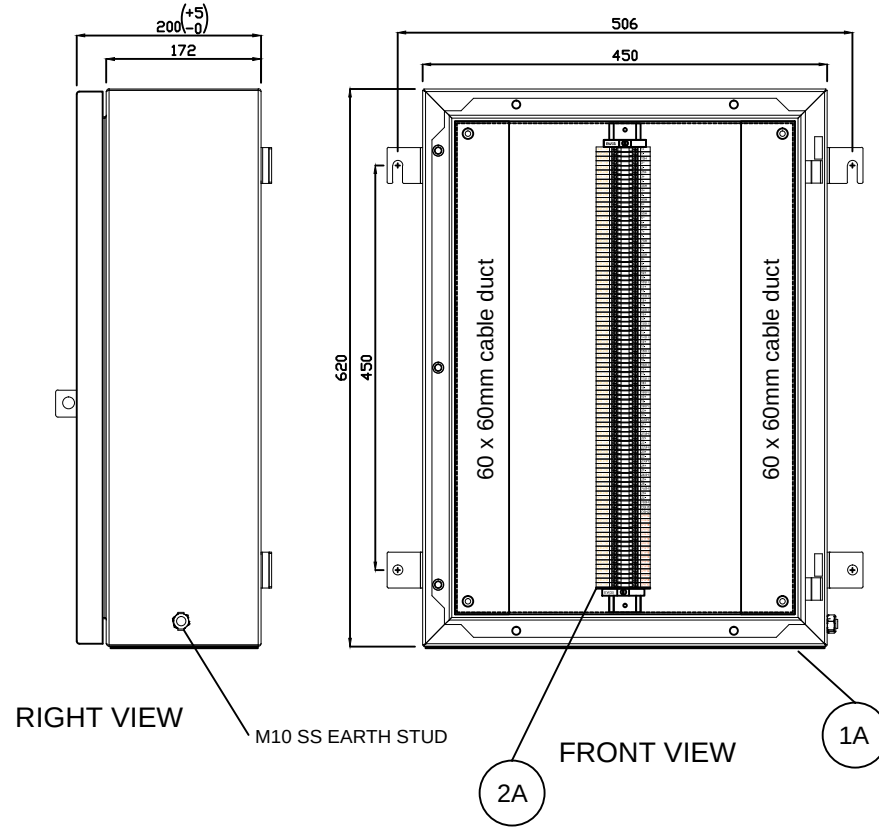

LEFT VIEW

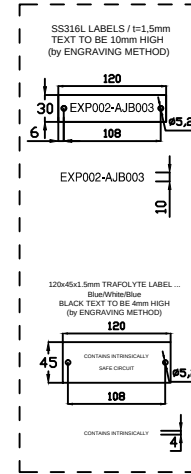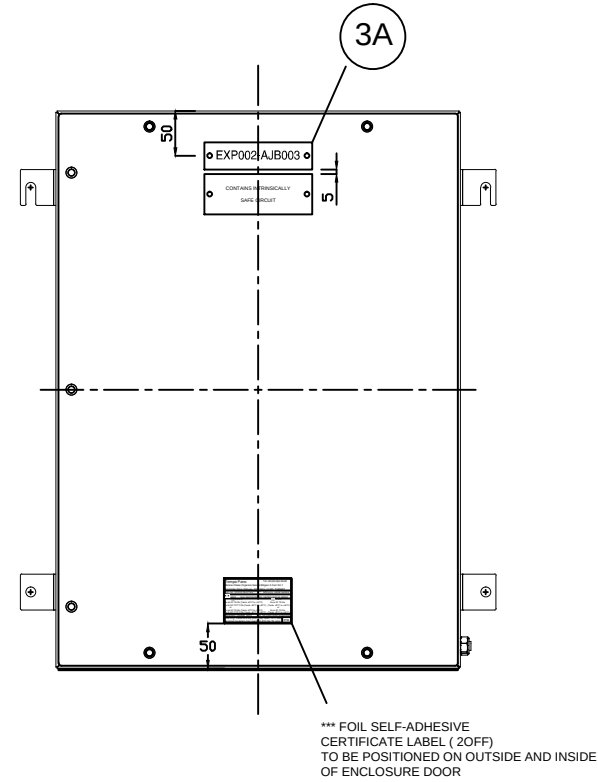


*** FOIL SELF-ADHESIVE
CERTIFICATE LABEL (20FF)
TO BE POSITIONED ON OUTSIDE AND INSIDE
OF ENCLOSURE DOOR

BILL OF MATERIALS

ITEM No	DESCRIPTION	MATERIAL	QTY.
1A	ENCLOSURE TYPE : TEX456220-S1 / WITH 1 GLAND PLATES GLOBAL (IECEX): CERTIFICATE: IECEX SIR 15.0056X COMPONENT BOX CERTIFICATE: IECEX SIR 15.0057U EXECUTION: Ex eb IIC T5 Gb (Tamb.: -40°C to +55°C) Ex ia IIC T5 Ga (Tamb.: -40°C to +55°C) Ex tb IIIC T72°C Db (Tamb.: -40°C to +55°C) EUROPE (ATEX): CERTIFICATE: SIRA 06 ATEX 3285X COMPONENT BOX CERTIFICATE: SIRA 06 ATEX 3286U EXECUTION: Ex II 2 G D Ex eb IIC T5 Gb (Tamb.: -40°C to +55°C) Ex II 1 G Ex ia IIC T5 Ga (Tamb.: -40°C to +55°C) Ex II 2 G D Ex tb IIIC T72°C Db (Tamb.: -40°C to +55°C) CLASSIFICATION AREA(S) : ZONE 1 (CATEGORY 2), ZONE 2 (CATEGORY 3), & ZONES 21 & 22 STANDARTS : EN IEC 60079-0; EN IEC 60079-7; EN 60079-11; EN 60079-31 INGRESS PROTECTION : IP66 (IN ACCORDANCE TO EN 60529) *** OPERATING INSTRUCTIONS AND SAFETY DATA SHEET WILL BE GIVEN WITH ENCLOSURES.	316L GRADE STAINLESS STEEL	1
2A	TEXTS4562 - PRE-GALVANISED STEEL MOUNTING PLATE WDU 2.5mm² BLUE TERMINALS (x96) c/w DOUBLE SIDED TERMINAL MARKERS END PLATE WAP 2,5-10 + STOPPER EW35 / DIN RAIL 7.5 x 35mm 60x60mm CABLE DUCT Ø10-Ø8 / 16mm² l=275mm EARTHING CABLE (x1)		1 SET
3A	120x50x1.5mm SS316L NAME PLATE/SCREW TYPE(TYPE B) TEXT TO BE 10mm HIGH BY ENGRAVING METHOD	SS316L	1
	120x45x1.5mm TRAFOLYTE LABEL ... Blue/White/Blue WHITE TEXT TO BE 4mm HIGH(by ENGRAVING METHOD)	TRAFFOLYTE	1

JB No	Cable Entries / Gland Sizes
	Bottom (ONLY HOLES)
EXP002-AJB003 ZP25STEX08130C03	18 x 16STSZE1TA5 - M16 TRUSEAL TSZe EMC Ex GLAND (3.0-7.0) 9 x 20DTSZE1TA5 - M20 TRUSEAL TSZe EMC Ex GLAND (5.0-14.0) 6 x 25DTSZE1TA5 - M25 TRUSEAL TSZe EMC Ex GLAND (9.0-18.0) 781EM2- M20 x 1.5 Drain Plug

Rev. No: 02	Rev. Date	Revised By		Explanation&Reason of the revision			
16.10.2025	Name	Signature	Date	Surface Finish	Material	Customer Order No	
DRAWN By	S.KAYA		22.09.2025	Scotch-Brite polished	316L Stainless Steel	PO250922	
CHECKED By	S.CAKIR		22.09.2025				
APPROVED By	M.GAZER		22.09.2025				
	Part Title			DRAWING NO	CUSTOMER	SCALE	SHEET
	JUNCTION BOX DIMENSIONAL DRAWING			TEX 456220-S1 /2	ETHOS ENERJİ	1/1	1 / 1