


1. Pico 2 / boot defaults

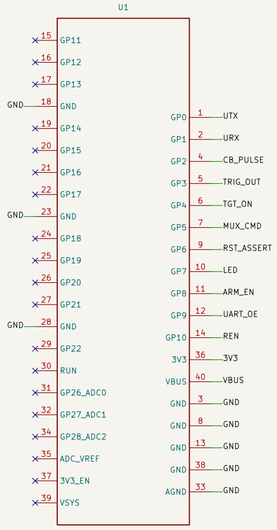


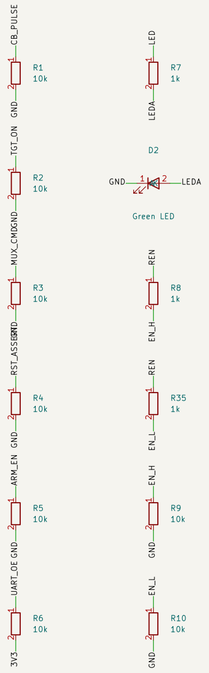


2. Target reservoirs (upstream of current limits)

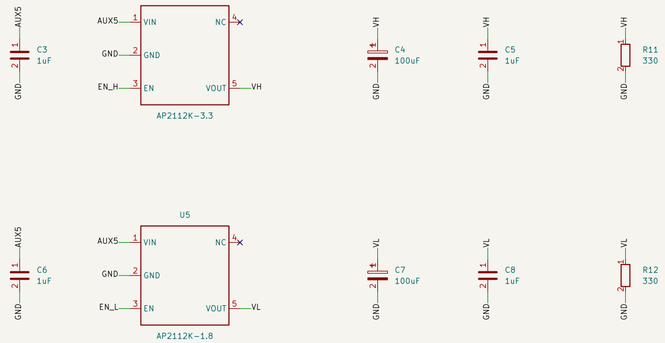


3. Voltage selector / slow disconnect

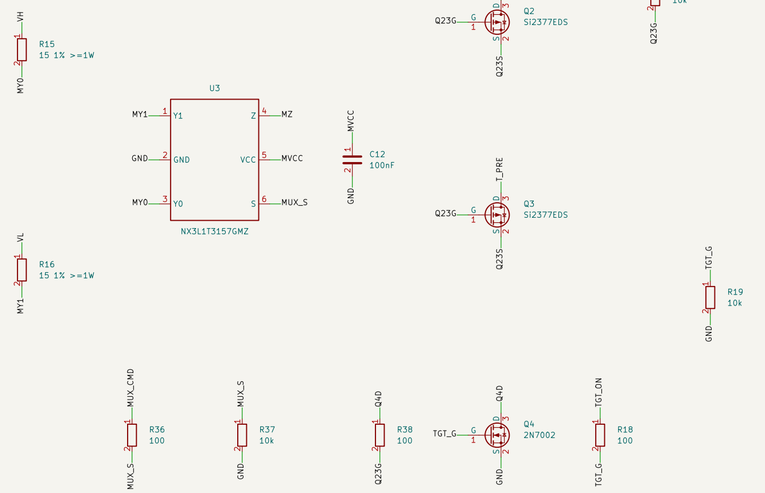


4. Retained 3.6 V mux supply

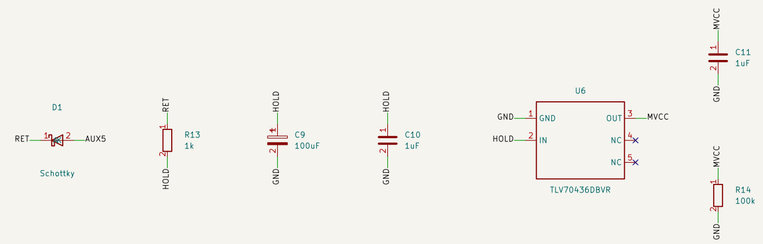


5. Reset / 3.3 V trigger

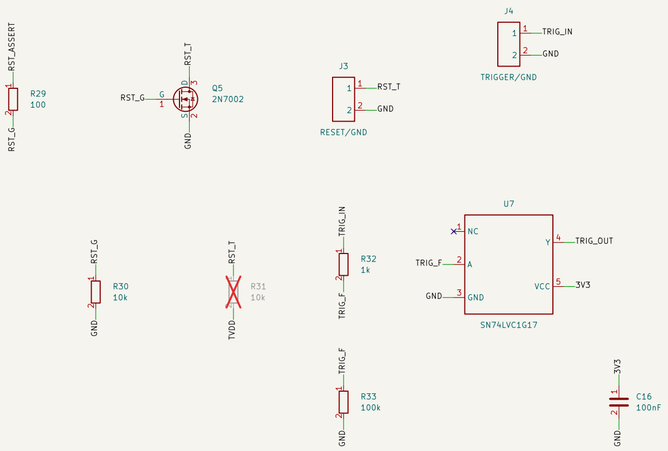


6. USB auxiliary branch / separate crowbar

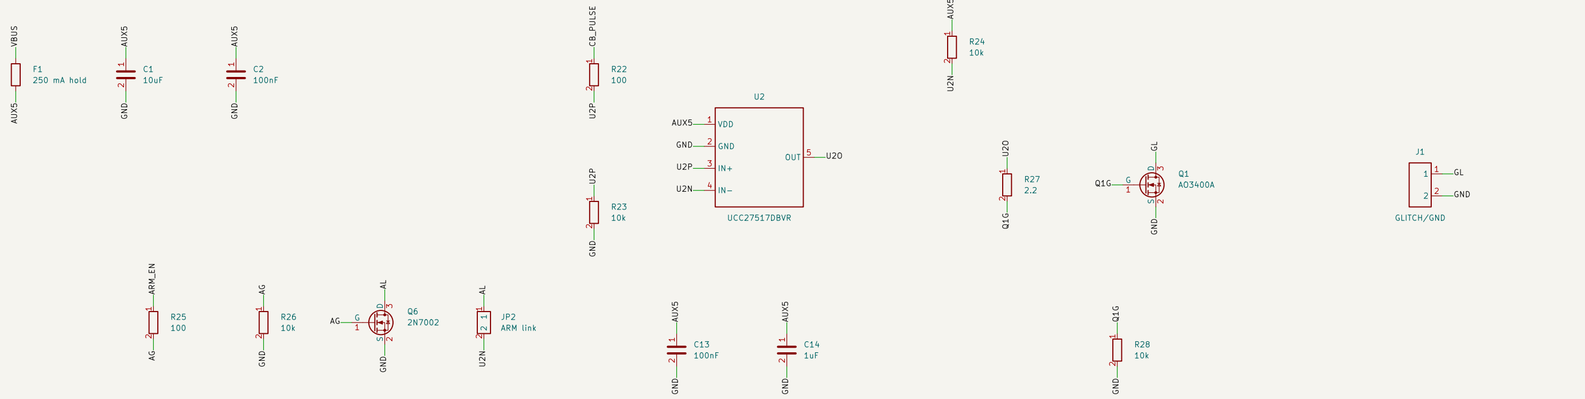

7. Optional UART (native DNP)

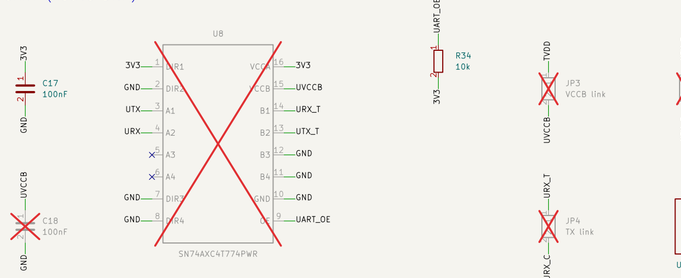

8. Probe pads / ERC flags

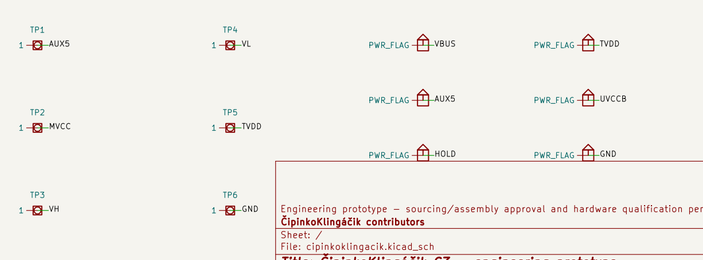

C3 ENGINEERING PROTOTYPE — HARDWARE UNQUALIFIED

15 ohm in each mux input; <=10 mA total target load.

100 nF: about 5.8 us settling; no settled 100 ns plateau.

GL is separate from TVDD. External supply: unplug TVDD.

No stuck-on timeout. Supervised expendable targets only.

U8/JP3–JP5/C18/R20/R31/R40/R41: DNP. ARM ships OPEN.

VH/VL=3.3/1.8 V reservoirs; MVCC=mux VCC; TVDD=target.

RST_ASSERT=1 asserts reset. Full alias list: hardware/README.md.

Engineering prototype — sourcing/assembly approval and hardware qualification pending

ČipinkoKlingáčik contributors

Sheet: /

File: cipinkoklingacik.kicad_sch

Title: *ČipinkoKlingáčik C3 — engineering prototype*

Size: A2	Date: 2026-10-30	**Rev: C3**
KiCad E.D.A. 10.0.7		Id: 1/1