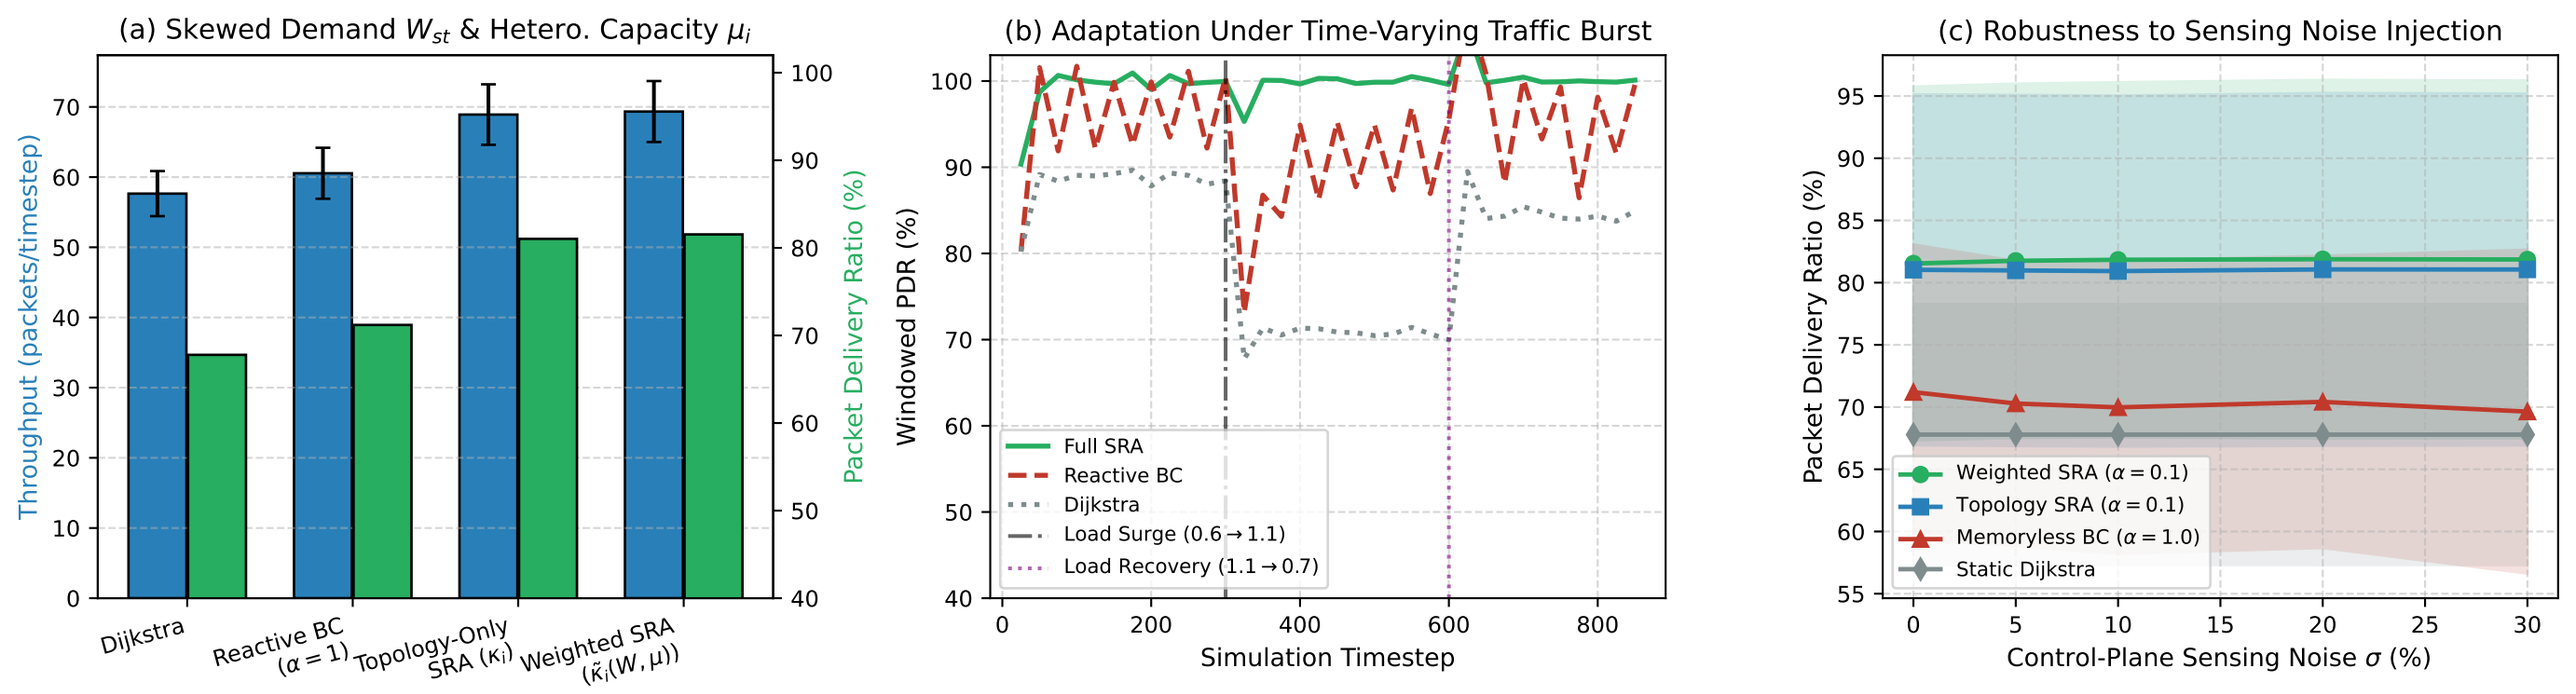
(a) Skewed Demand W_{st} & Hetero. Capacity μ_i
Throughput (packets/timestep)
Packet Delivery Ratio (%)
Dijkstra
Reactive BC ($\alpha = 1$)
Topology-Only SRA (κ_i)
Weighted SRA ($\tilde{\kappa}_i(W, \mu)$)
(b) Adaptation Under Time-Varying Traffic Burst
Windowed PDR (%)
Simulation Timestep
Full SRA
Reactive BC
Dijkstra
Load Surge (0.6 → 1.1)
Load Recovery (1.1 → 0.7)
(c) Robustness to Sensing Noise Injection
Packet Delivery Ratio (%)
Control-Plane Sensing Noise σ (%)
Weighted SRA ($\alpha = 0.1$)
Topology SRA ($\alpha = 0.1$)
Memoryless BC ($\alpha = 1.0$)
Static Dijkstra