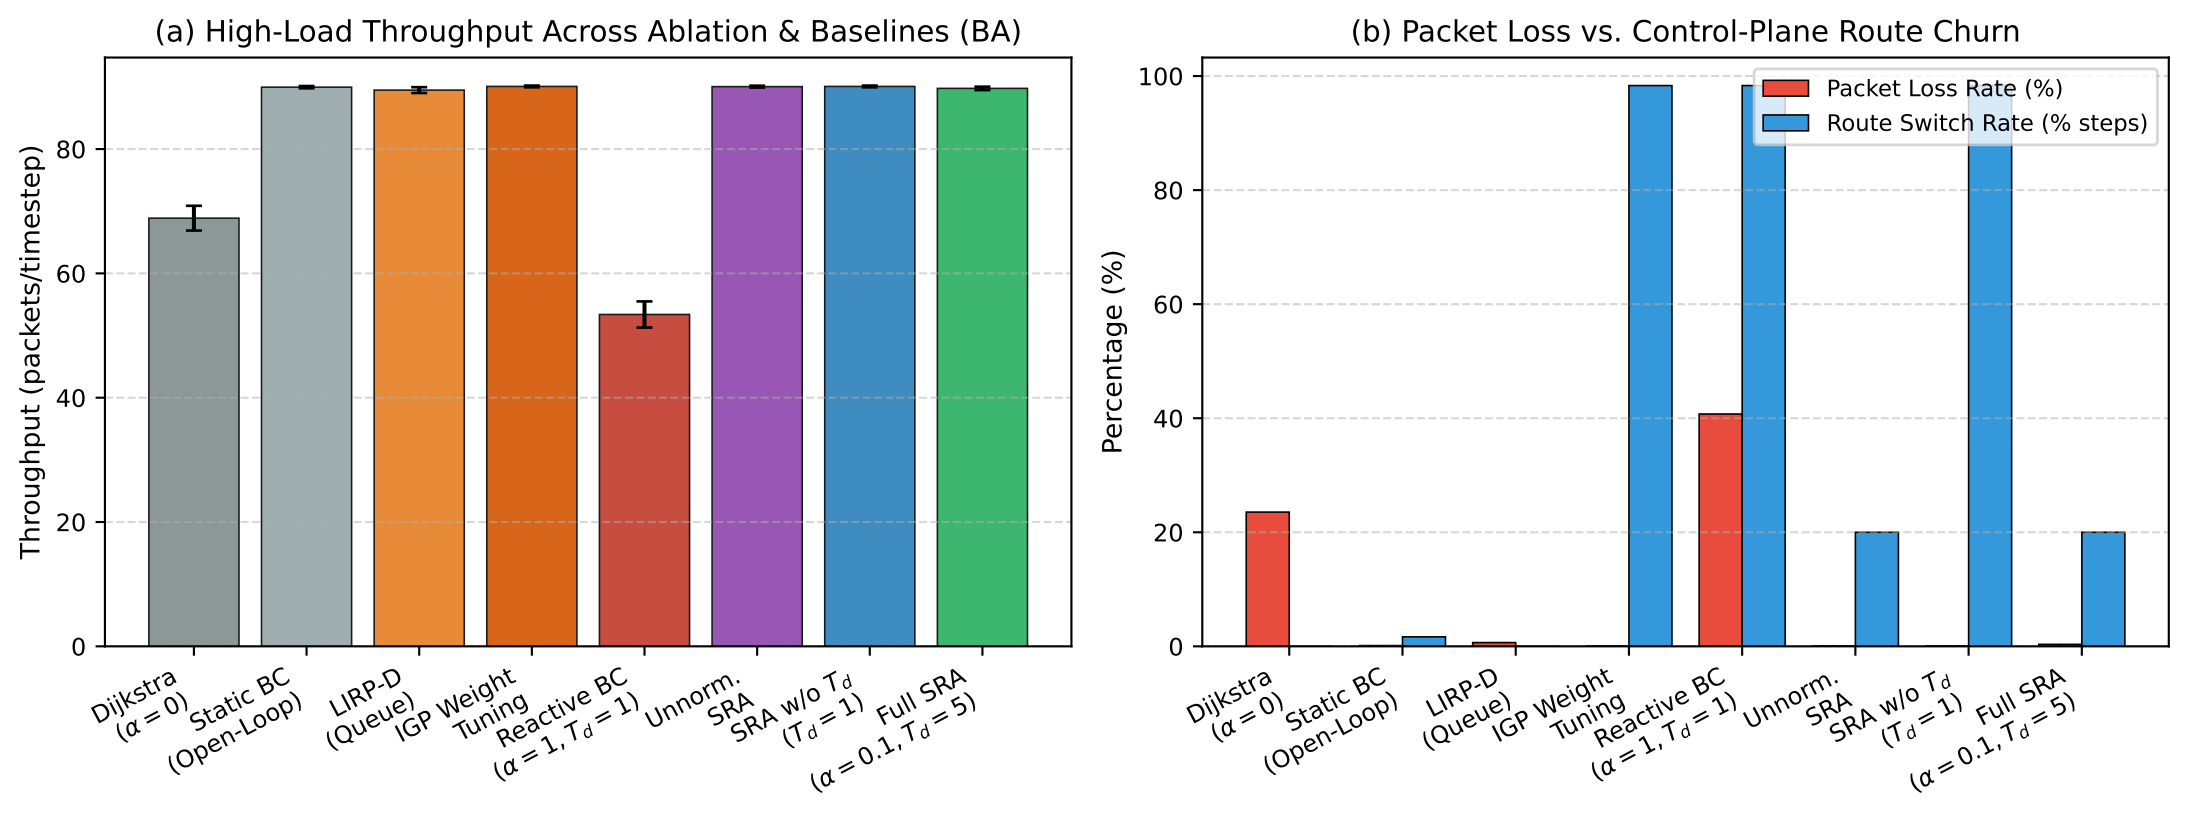
(a) High-Load Throughput Across Ablation & Baselines (BA)
Throughput (packets/timestep)
0
20
40
60
80
Dijkstra ($\alpha = 0$)
Static BC (Open-Loop)
LIRP-D (Queue)
IGP Weight Tuning
Reactive BC ($\alpha = 1, T_d = 1$)
Unnorm. SRA
SRA w/o T_d ($T_d = 1$)
Full SRA ($\alpha = 0.1, T_d = 5$)
(b) Packet Loss vs. Control-Plane Route Churn
Percentage (%)
0
20
40
60
80
100
Packet Loss Rate (%)
Route Switch Rate (% steps)
Dijkstra ($\alpha = 0$)
Static BC (Open-Loop)
LIRP-D (Queue)
IGP Weight Tuning
Reactive BC ($\alpha = 1, T_d = 1$)
Unnorm. SRA
SRA w/o T_d ($T_d = 1$)
Full SRA ($\alpha = 0.1, T_d = 5$)