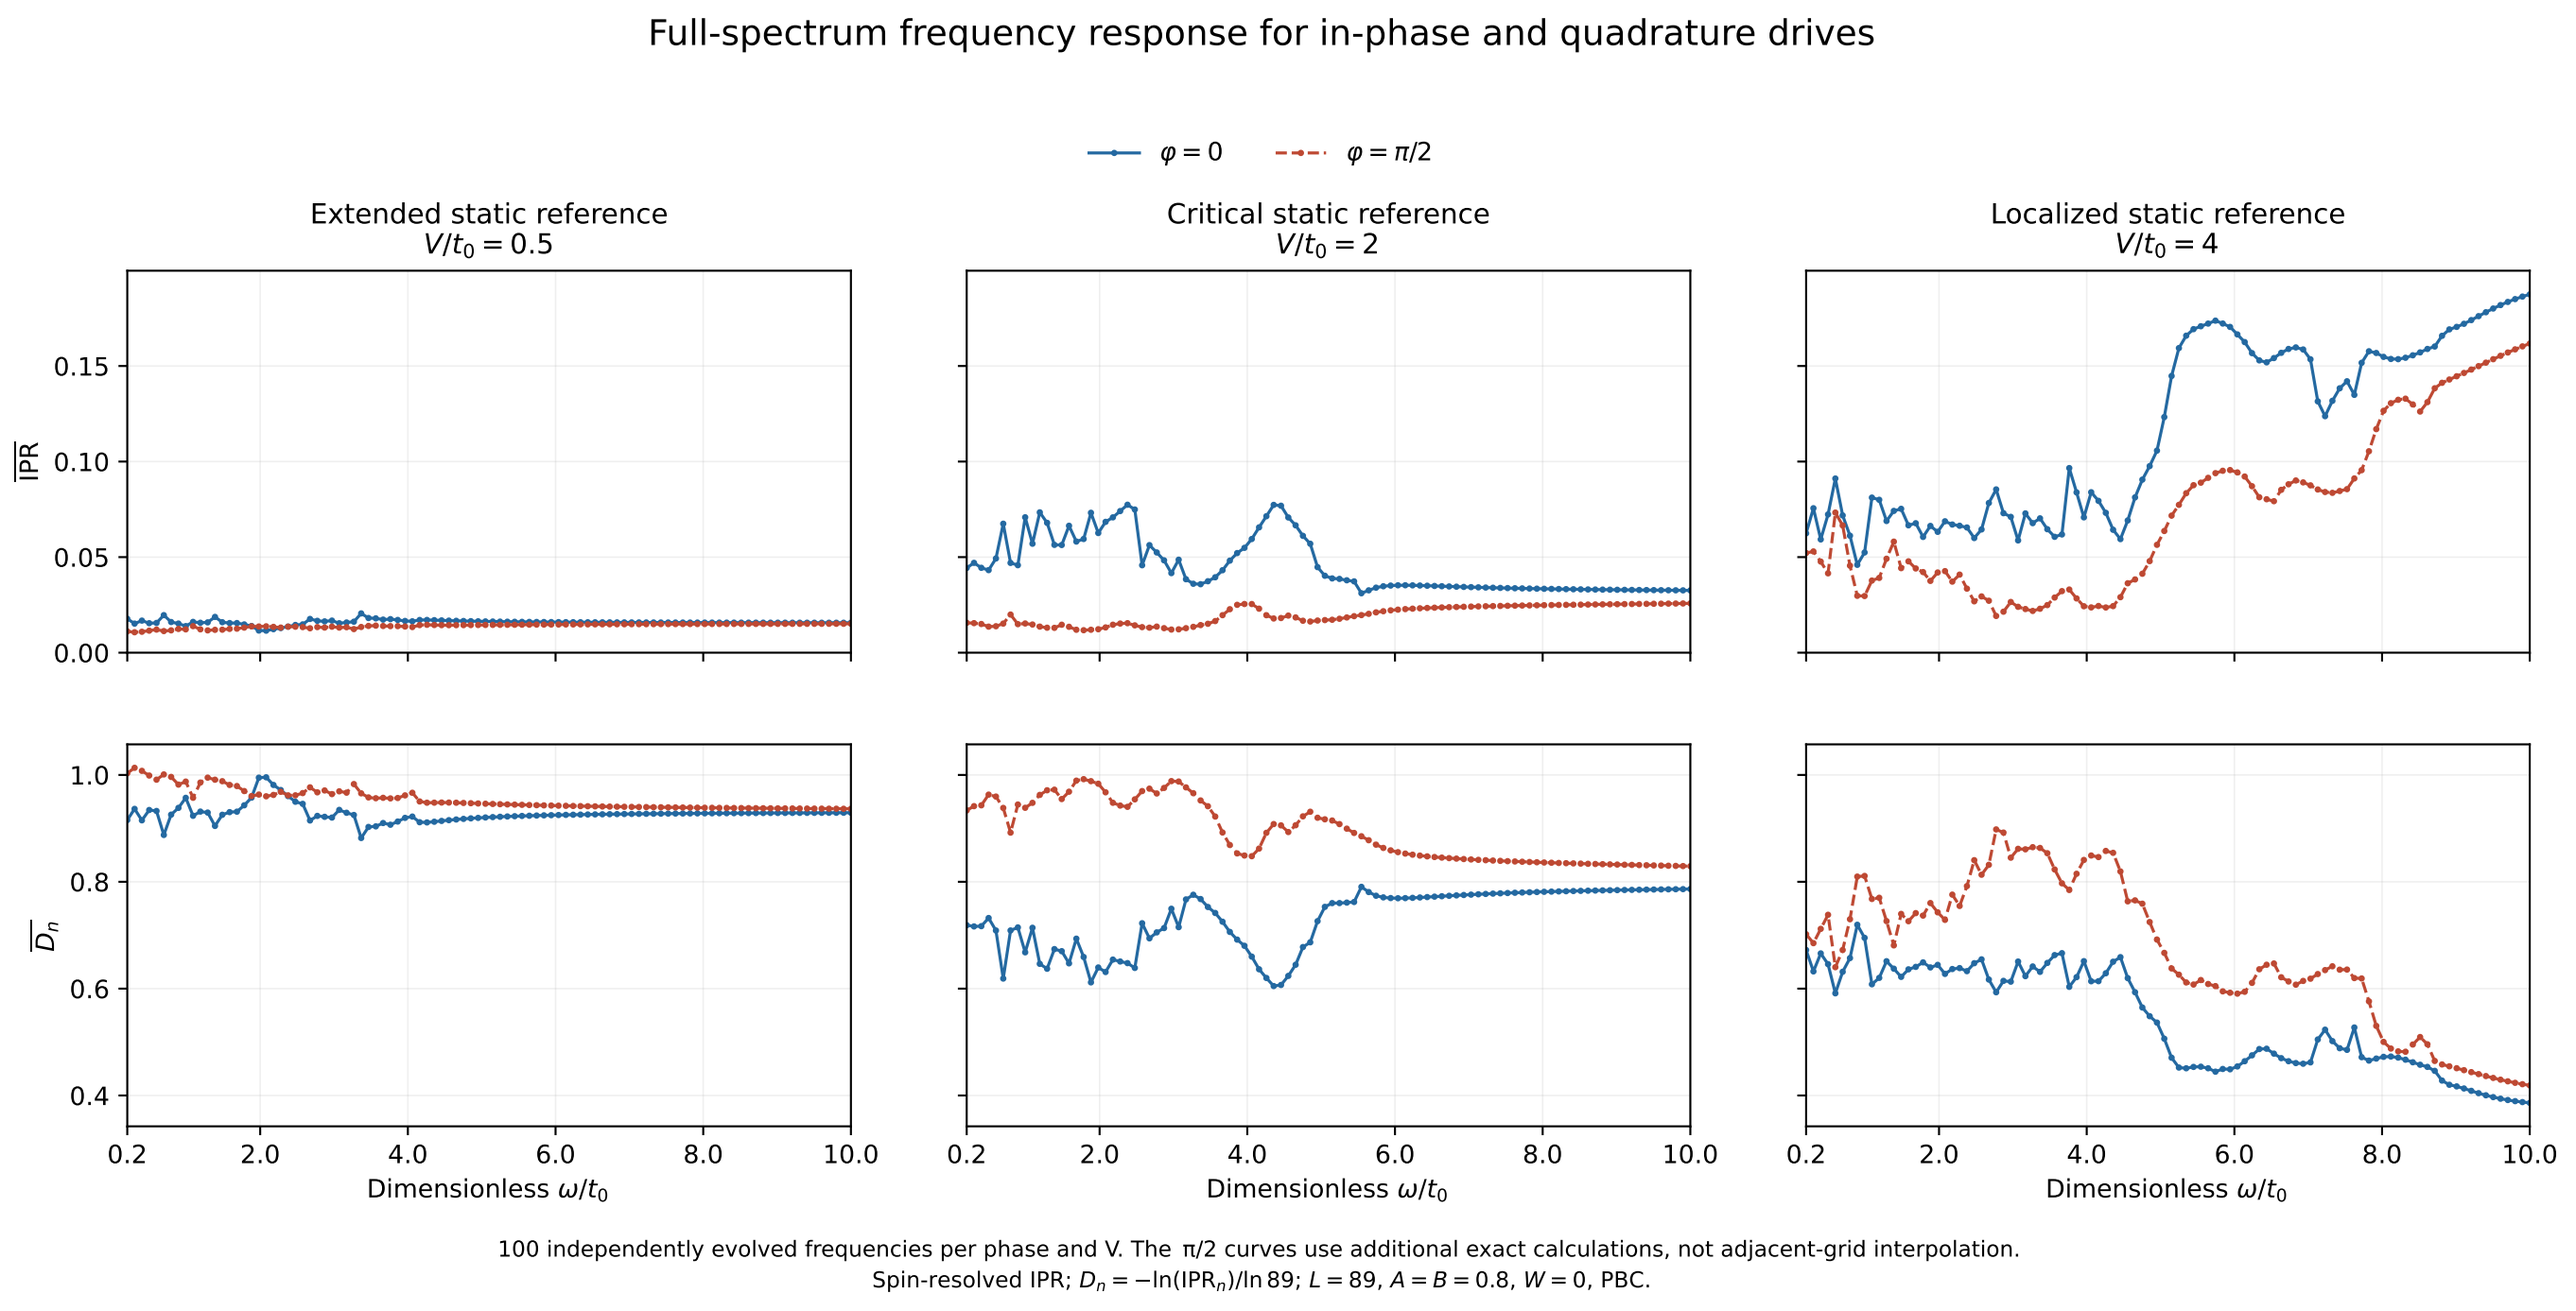
Full-spectrum frequency response for in-phase and quadrature drives
φ = 0
φ = π/2
Extended static reference
V/t0 = 0.5
Critical static reference
V/t0 = 2
Localized static reference
V/t0 = 4
IPR
0.00
0.05
0.10
0.15
Dn
0.4
0.6
0.8
1.0
0.2
2.0
4.0
6.0
8.0
10.0
Dimensionless ω/t0
100 independently evolved frequencies per phase and V. The π/2 curves use additional exact calculations, not adjacent-grid interpolation.
Spin-resolved IPR; Dn = −ln(IPRn)/ln 89; L = 89, A = B = 0.8, W = 0, PBC.