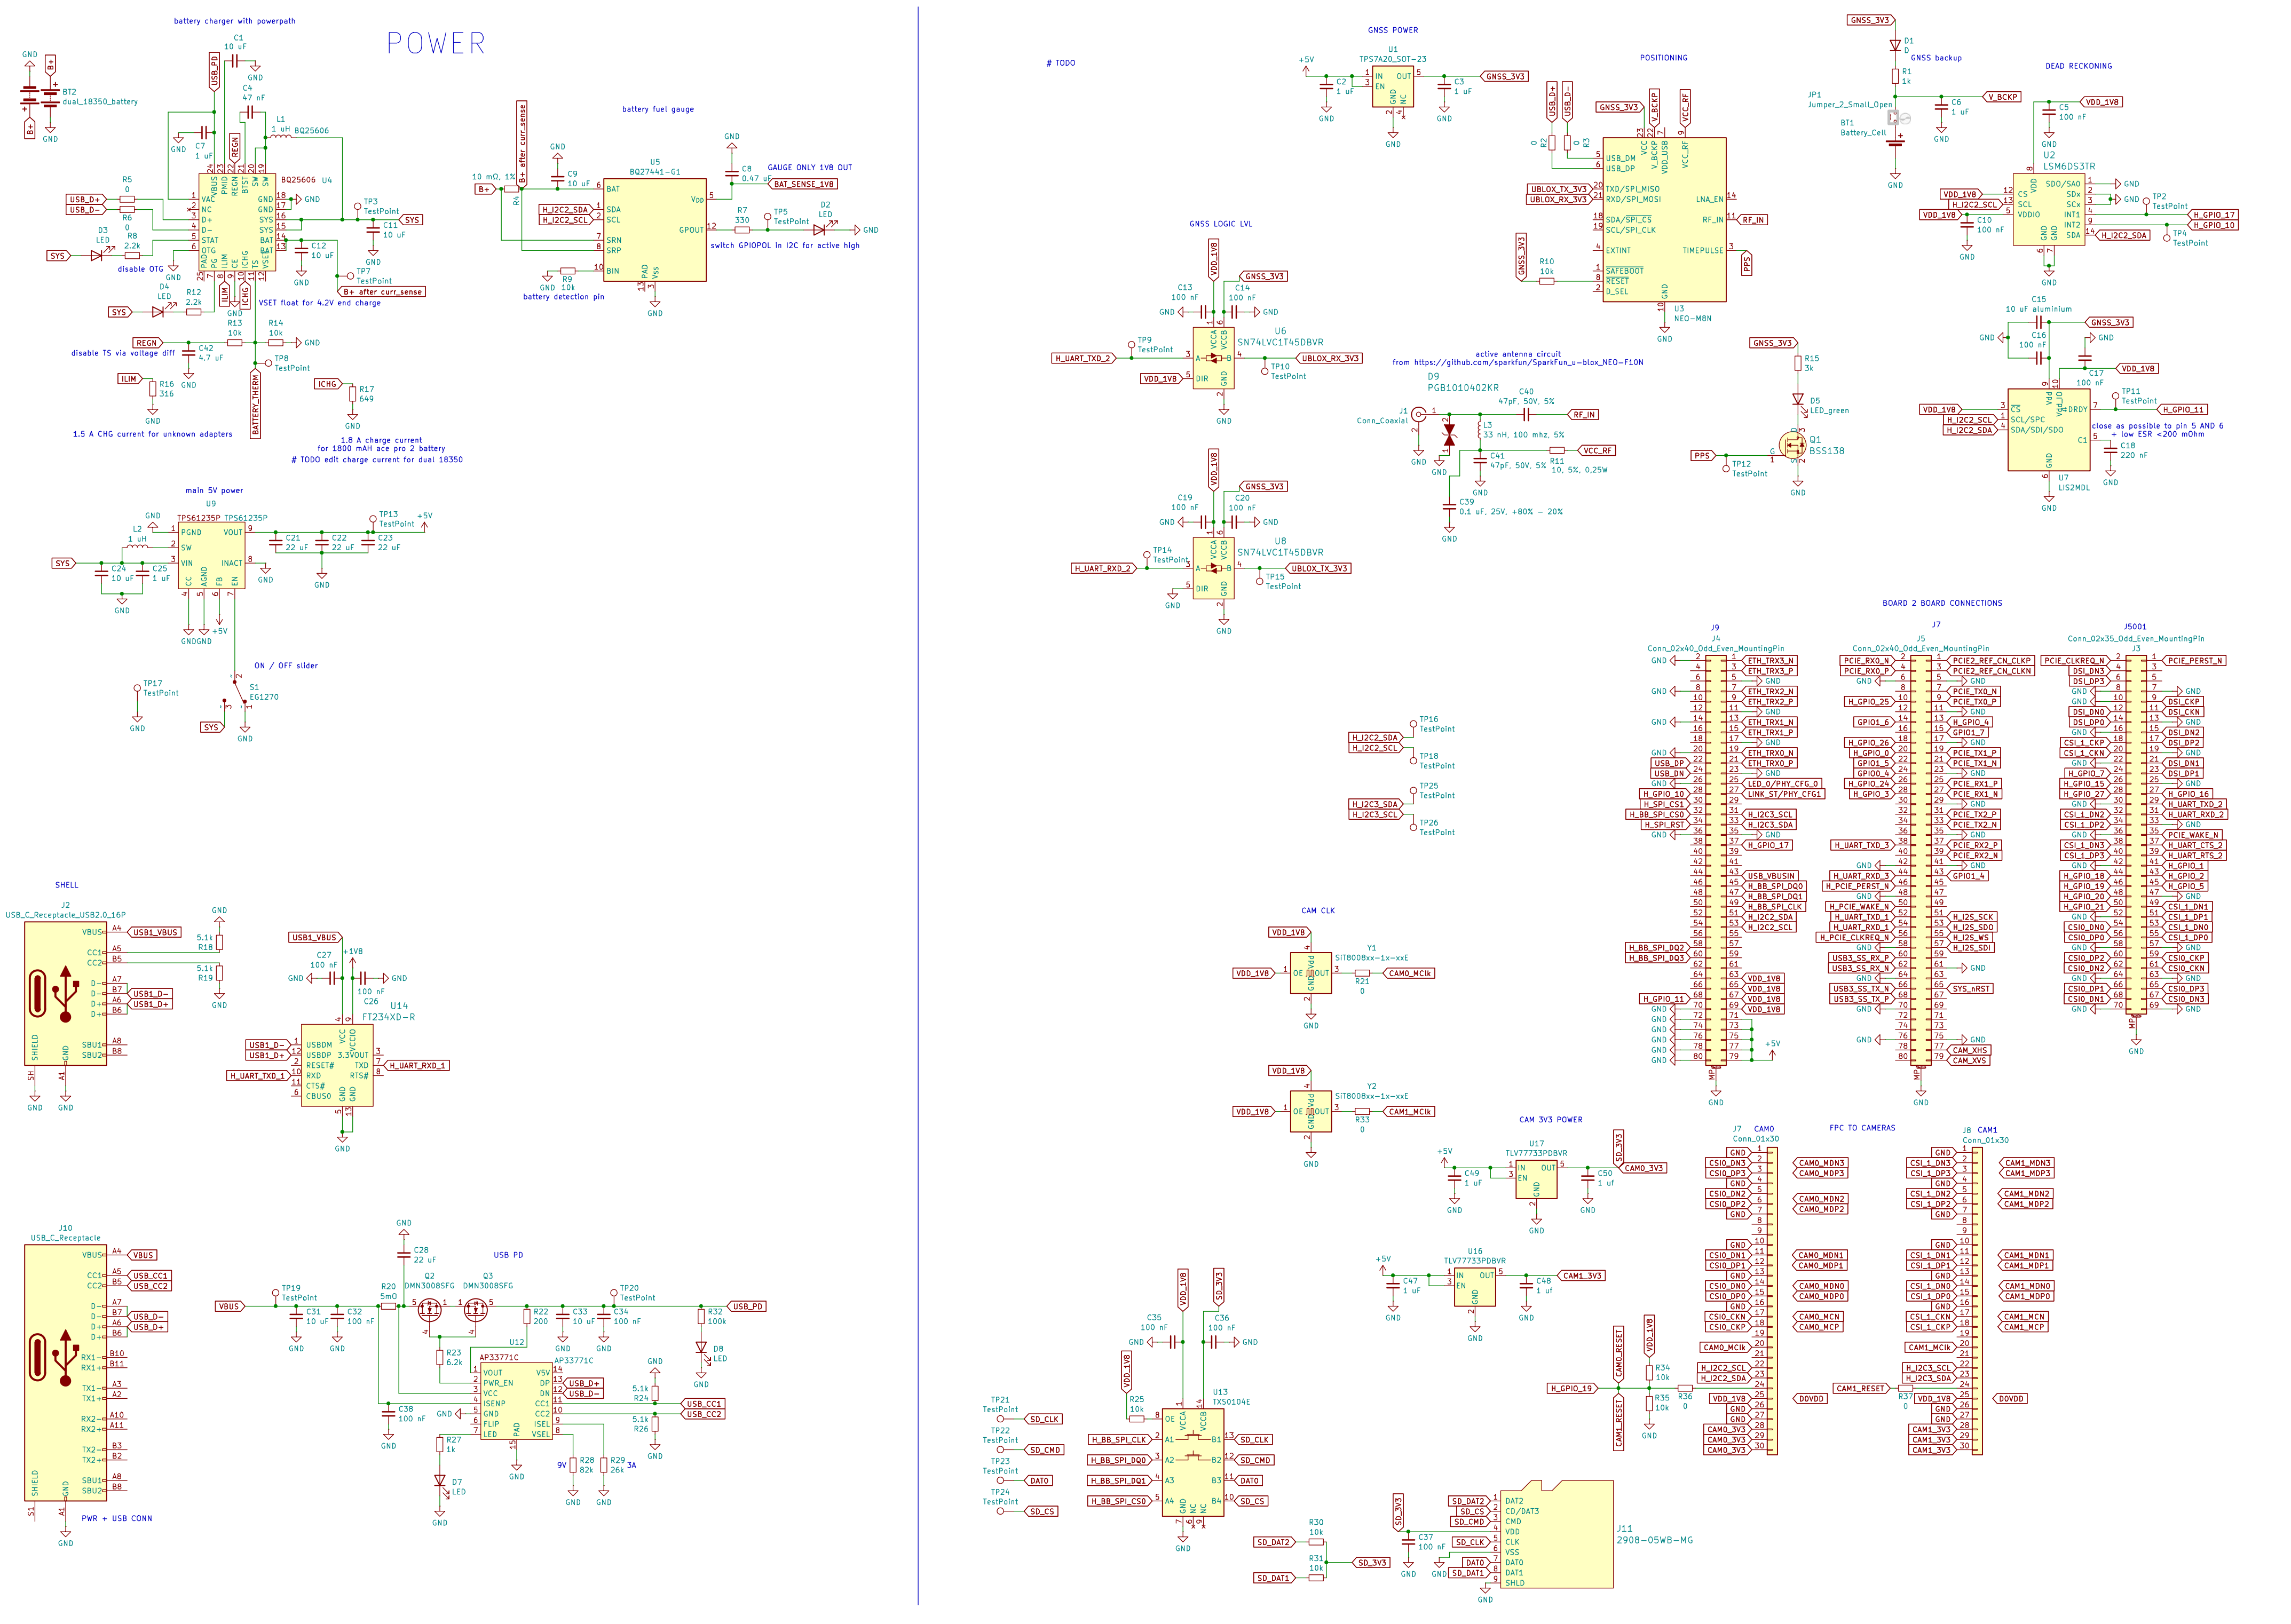
POWER
battery charger with powerpath
BT2 dual_18350_battery
BQ25606 U4
disable OTG
disable TS via voltage diff
VSET float for 4.2V end charge
1.5 A CHG current for unknown adapters
1.8 A charge current
for 1800 mAh ace pro 2 battery
TODO edit charge current for dual 18350
battery fuel gauge
BQ27441-G1
GAUGE ONLY 1V8 OUT
switch GPIOPOL in I2C for active high
battery detection pin
10 mΩ, 1%
B+ after curr_sense
main 5V power
TPS61235P
ON / OFF slider
EG1270
SHELL
USB_C_Receptacle_USB2.0_16P
FT234XD-R
USB_C_Receptacle
PWR + USB CONN
USB PD
AP33771C
DMN3008SFG
TODO
GNSS POWER
TPS7A20_SOT-23
POSITIONING
NEO-M8N
GNSS LOGIC LVL
SN74LVC1T45DBVR
active antenna circuit
from https://github.com/sparkfun/SparkFun_u-blox_NEO-F10N
PGB1010402KR
Conn_Coaxial
47pF, 50V, 5%
33 nH, 100 mhz, 5%
10, 5%, 0.25W
0.1 uF, 25V, +80% - 20%
GNSS backup
Jumper_2_Small_Open
Battery_Cell
DEAD RECKONING
LSM6DS3TR
10 uF aluminium
LIS2MDL
close as possible to pin 5 AND 6
+ low ESR <200 mOhm
BSS138
LED_green
BOARD 2 BOARD CONNECTIONS
Conn_02x40_Odd_Even_MountingPin
Conn_02x35_Odd_Even_MountingPin
CAM CLK
SiT8008xx-1x-xxE
CAM 3V3 POWER
TLV77733PDBVR
FPC TO CAMERAS
CAM0
CAM1
Conn_01x30
TXS0104E
2908-05WB-MG