


HA5833典型应用图

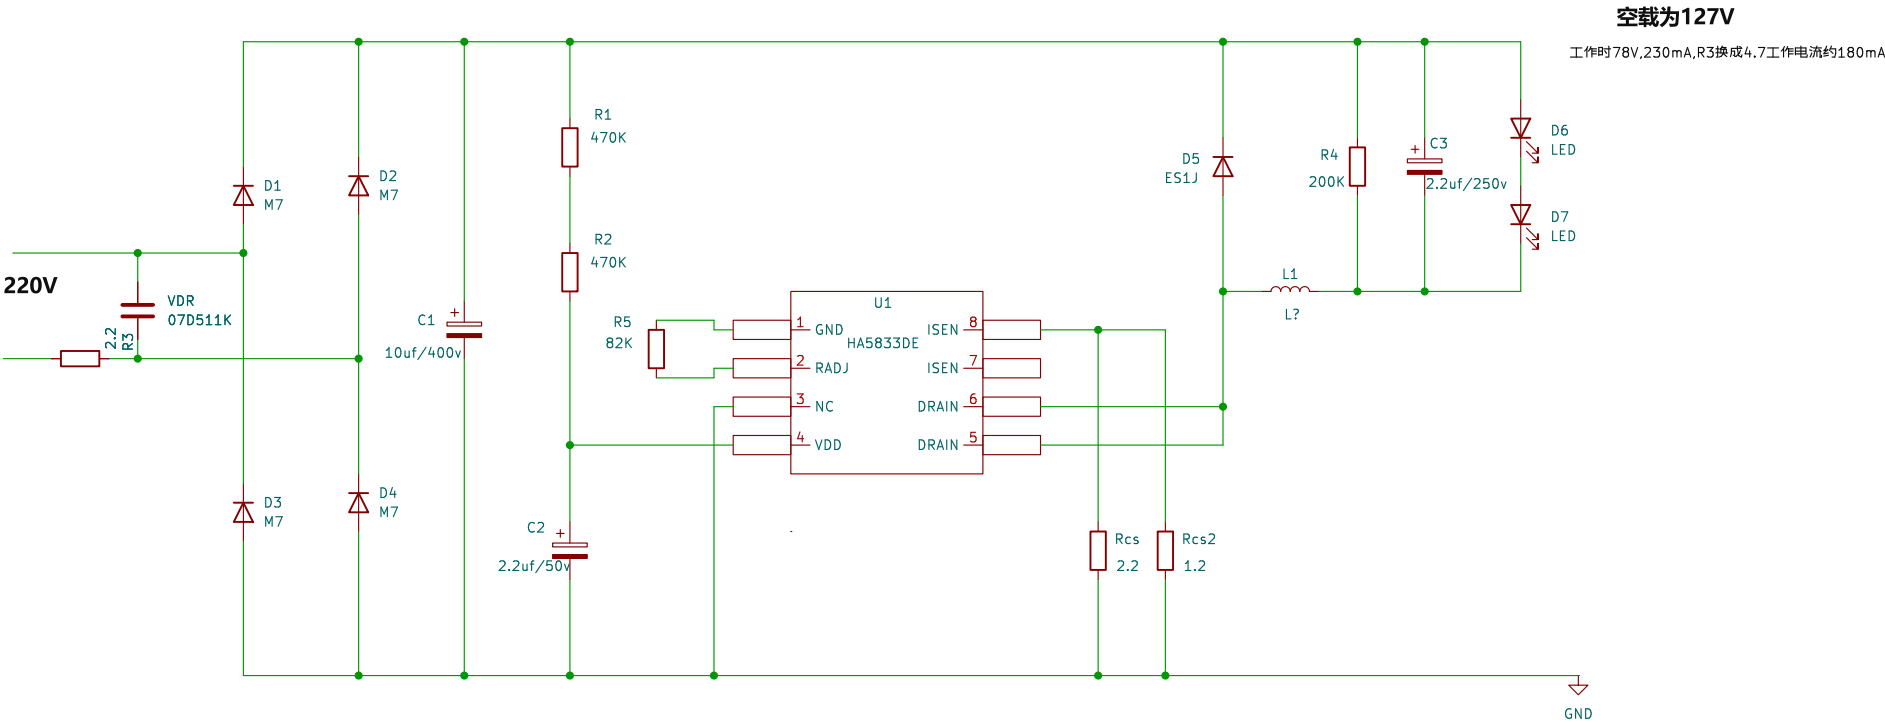

空载为127V

工作时78V,230mA,R3换成4.7工作电流约180mA

|                                  |         |      |
|----------------------------------|---------|------|
| Sheet: /                         |         |      |
| File: LED_25W_MC5833DE.kicad_sch |         |      |
| Title:                           |         |      |
| Size: A4                         | Date:   | Rev: |
| KiCad E.D.A. 8.0.7               | Id: 1/1 |      |