

Final Project

Team Number: 11

Team Name: B.A.T.R.A. (Balanced Automated Two-axis Rotational Assembly)

Team Member Name	Email Address
Eugene Veksler	eugvek@seas.upenn.edu
Maxim Veksler	mveksler@seas.upenn.edu
Ishan Mungikar	mungikar@seas.upenn.edu

GitHub Repository URL: <https://github.com/upenn-embedded/final-project-s26-t11>

GitHub Pages Website URL: [for final submission]*

Final Project Proposal

1. Abstract


B.A.T.R.A. is an automated two-axis IMU-stabilized camera gimbal with joystick control. An inertial measurement unit continuously determines the camera's orientation and a PID control algorithm drives two servo motors to keep the camera stable. An analog joystick is used by the operator to set the horizontal and vertical viewing angle. Bare metal C firmware on an ATmega328PB is used to maintain the set angle. Additionally, an ESP32 Wi-Fi module is utilized to wireless control the horizontal and vertical viewing angle.

2. Motivation

Any time you watch a smooth aerial drone shot, use a handheld camera without a nauseating shake, or watch a robot navigate a warehouse, there is some kind of video stabilization system working behind the scenes. Video stabilization was always essential for high quality videos or movies, but now it has become crucial for computer vision applications where stable video makes consistent object detection possible.


Although video gimbals aren't a niche topic, the process of designing a gimbal is very application specific and tackles the core challenge of decreasing the noise in input data. By also instituting remote control with our project, we allow this mechanism to be potentially extended in applications involving autonomous vehicles and drones.


3. System Block Diagram

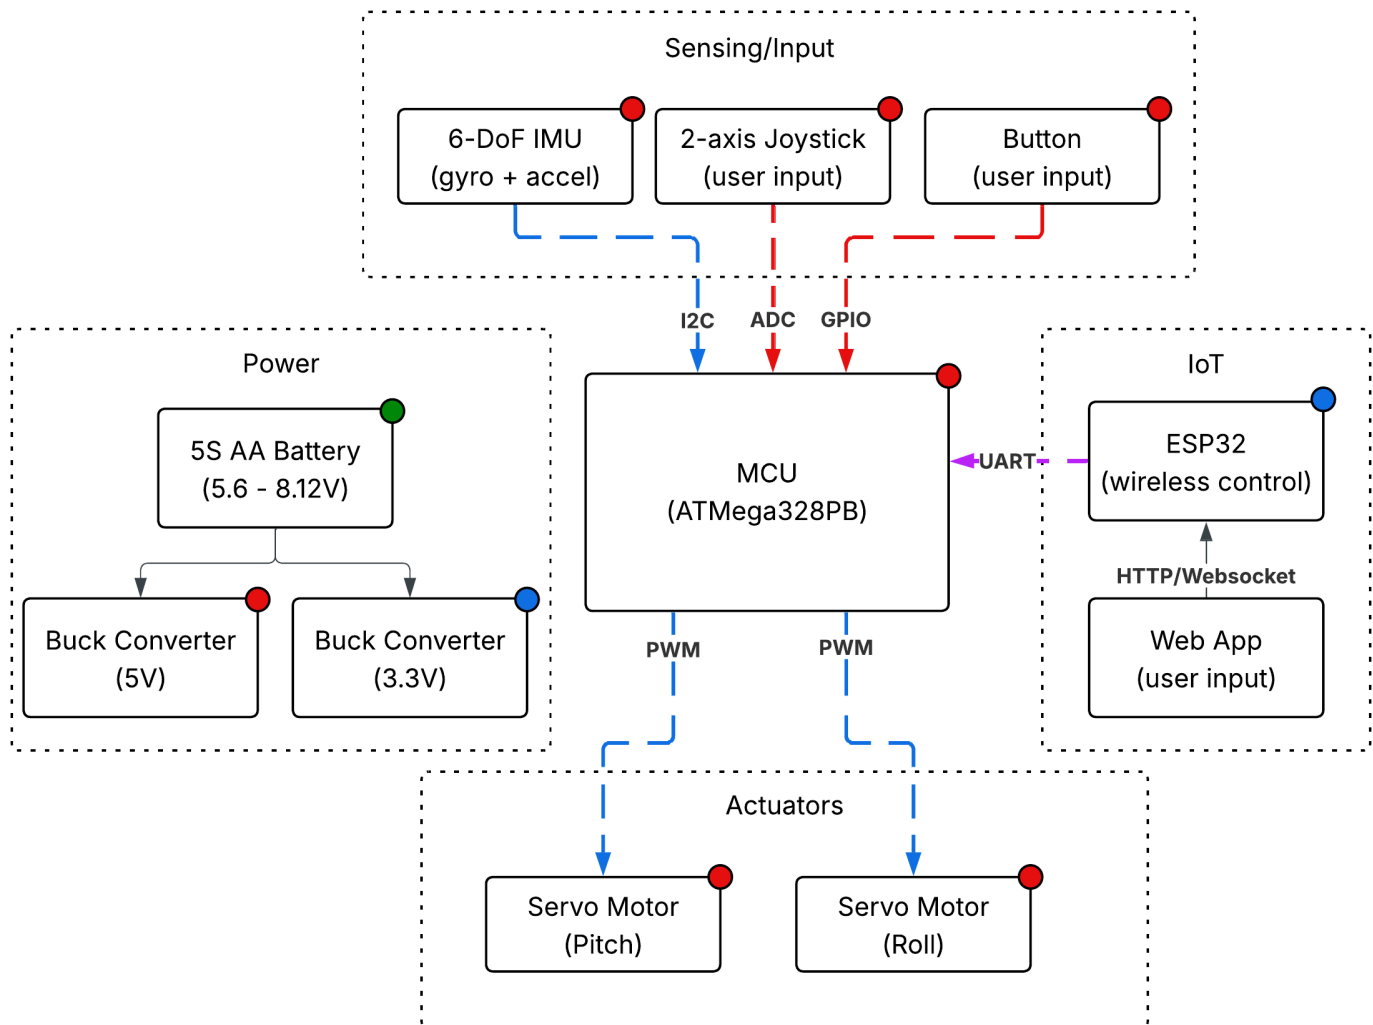

4. Design Sketches

B.A.T.R.A Design Sketch

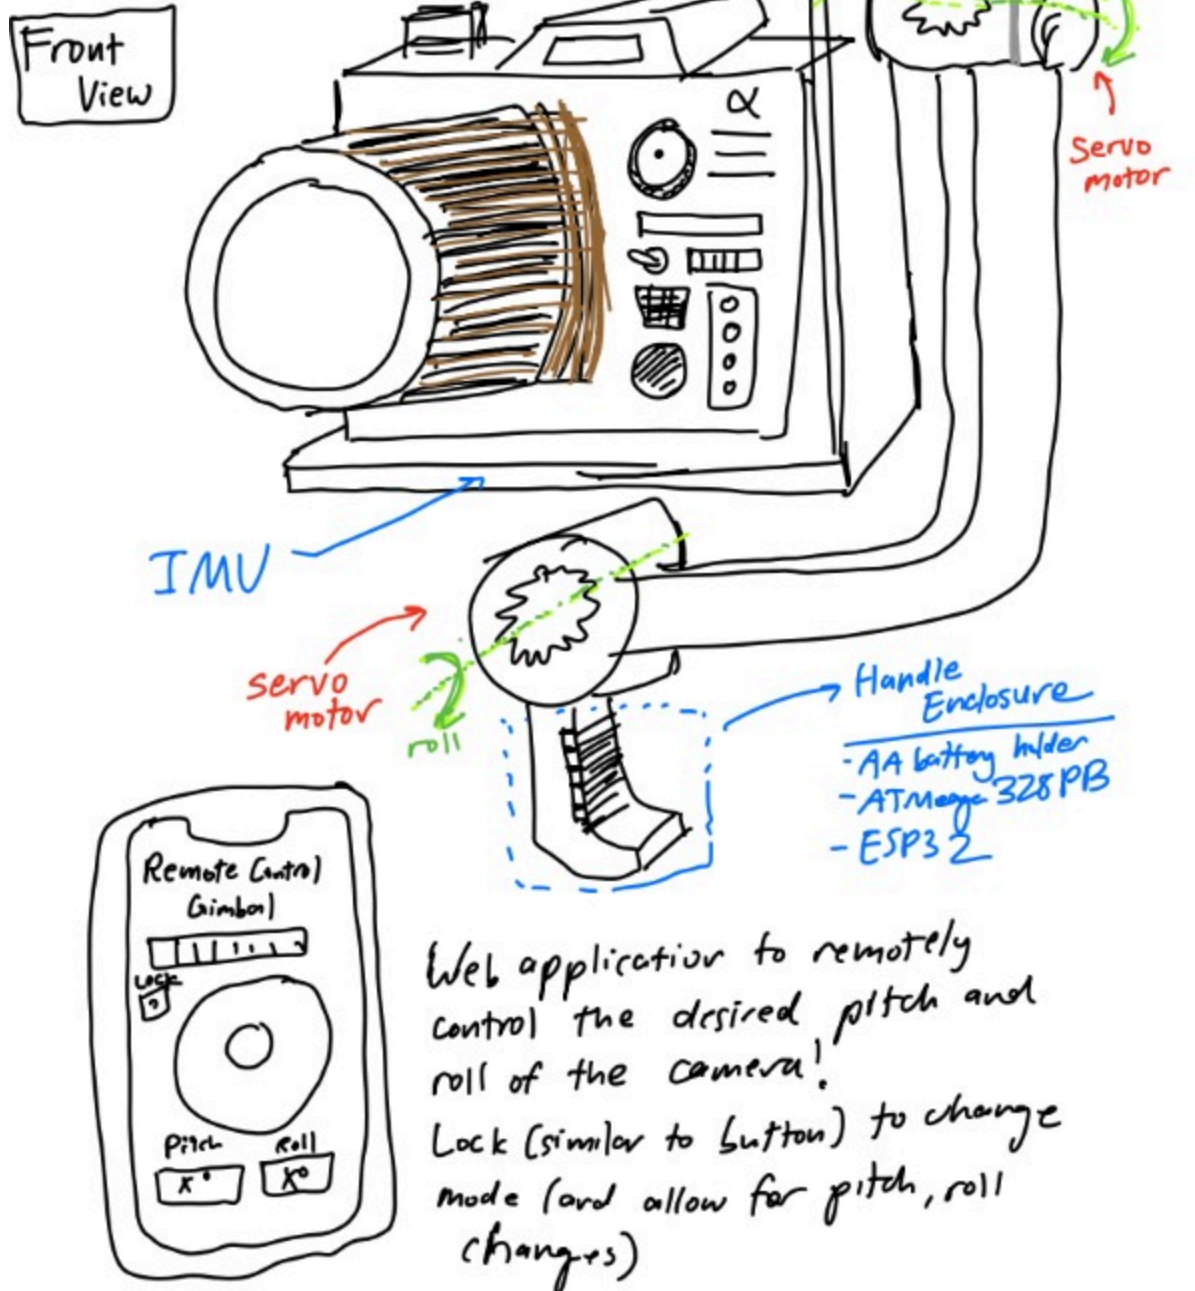

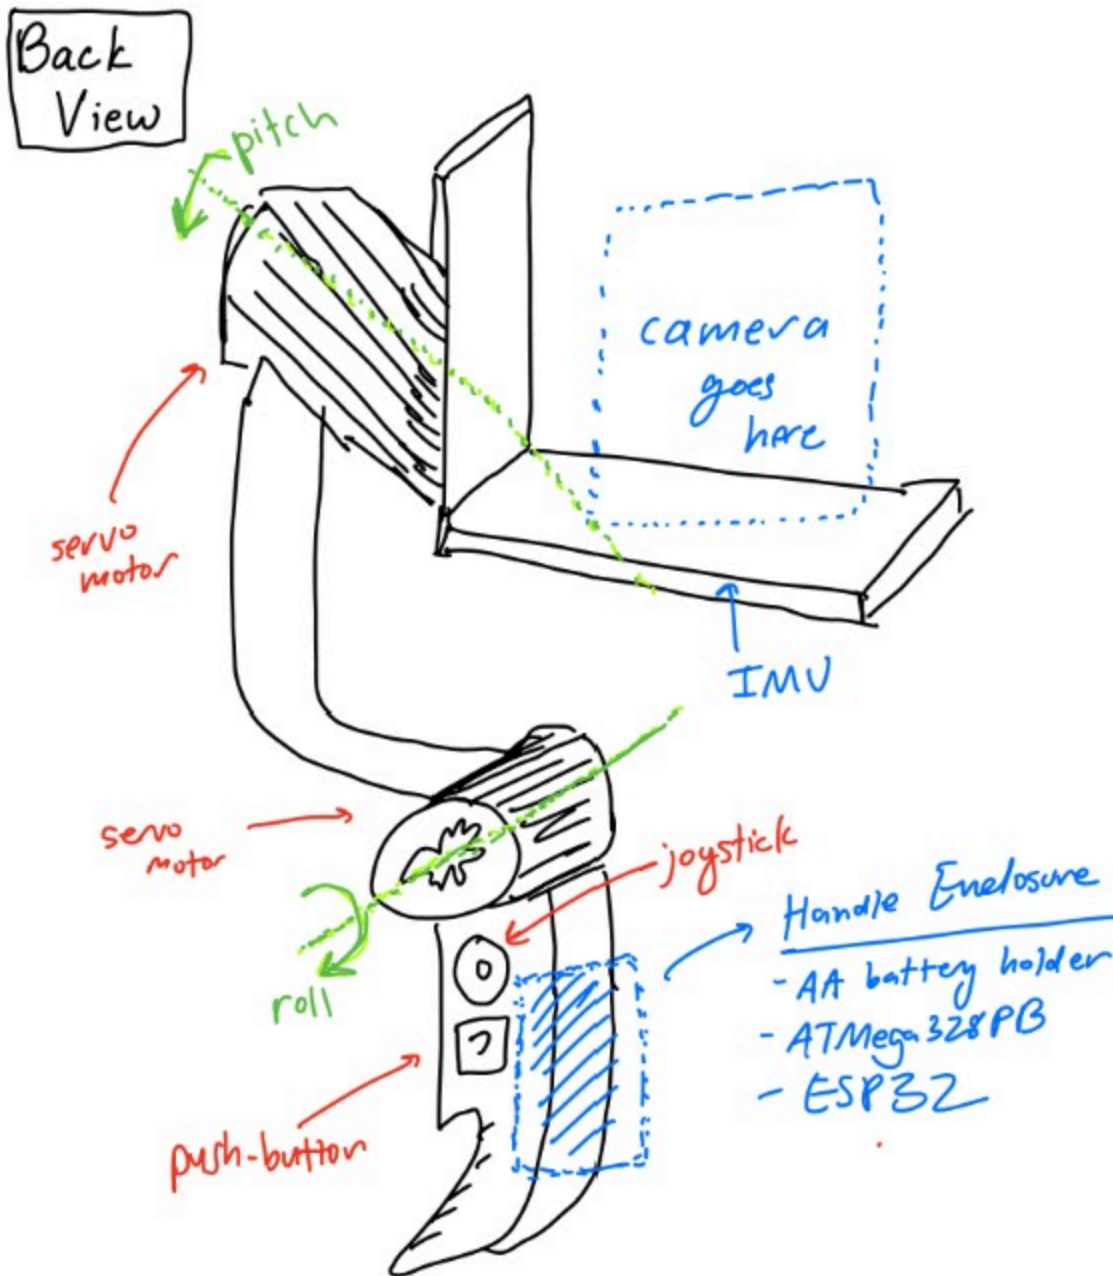

5. Software Requirements Specification (SRS)

The software for B.A.T.R.A. is responsible for reading sensor data, running the stabilization control loop, processing user input on the joy stick, and driving the servo motor output. All of this is meant to be done in real time on an ATmega328PB running bare metal C. We also have an ESP32 Wi-Fi module which allows for wireless communication with a device running a web application to remotely control the orientation of the camera.

5.1 Definitions, Abbreviations

- IMU - Inertial Measurement Unit (Provides acceleration and gyroscope data)
- PID - Proportional-Integral-Derivative control algorithm
- PWM - Pulse Width Modulation (Signal format used for controlling servo motor position)
- ADC - Analog to Digital Converter (Reads analog voltage values and converts into digital format)
- I2C - Inter-Integrated Circuit Communication Protocol (Serial bus communication used to communicate with IMU)
- Dead Region - Position range around joystick center that is read as a center input to reduce noise due to misalignment in joy stick construction

5.2 Functionality

ID	Description
SRS-01	The firmware shall read 3-axis acceleration data and 3-axis gyroscope data from the IMU over I2C at a rate of 100 Hz +/- 10 Hz.
SRS-02	The firmware shall sample the 2 ADC channels recording data from the 2 axes of the joystick at a rate of at least 50 Hz and have a dead region at +/- 5% of the sensor range around the joystick sensor to prevent "stick drift".
SRS-03	The firmware shall complete a PID control loop for each axis at least every 10 ms +/- 2 ms. This loop involves computing the corrective commands send to the servo motors from the error between measured and desired angle.
SRS-04	The firmware shall generate the PWM signals for the two servo motors with PWM ranges from 1 ms to 2 ms, corresponding to the angular range of the servo motors.
SRS-05	The firmware shall support two operating modes. One mode is a stabilized hold where the current pitch and roll angles are maintained, and the other mode is where a joystick is used sets the desired stabilization angle (and thus the camera position can be controlled from the joystick). The modes can be selected using a mode button.
SRS-06	When the mode select button is held for at least 1 second, the firmware shall level out the platform within 2 seconds.
SRS-07	The stabilization firmware shall reject any disturbances of +/- 15 degrees in the roll or pitch and return the platform to +/- 3 degrees of the requested roll/pitch within 500 ms.
SRS-08	The firmware shall accept wireless commands for pitch, roll, and mode received from ESP32 over UART and update the desired angle settings within 100ms of receiving update.

6. Hardware Requirements Specification (HRS)

The hardware forms the physical construction and control of B.A.T.R.A. The sensors, frame, power system, switches, motors, bearings, and user-interface components provide functionality to the software.

6.1 Definitions, Abbreviations

- Servo - A servo motor with an integrted gearbox that is controlled via PWM signal communication
- LDO - Low-Dropout Regulator (A voltage regulator with a low dropout)
- DOF - Degrees of Freedom

6.2 Functionality

ID	Description
HRS-01	The system shall use two servos each providing at least 1.8 kg-cm of torque.
HRS-02	The mechanical frame shall provide two independent rotational axes (roll and pitch) with at least +/- 30 degrees of rotation on each axis.
HRS-03	An IMU shall communicate with ATmega328PB over I2C to provide 16-bit acceleration and gyroscope data.
HRS-04	The balanced platform shall support a camera of at least 30 grams without degraded performance.
HRS-05	The system shall be powered by 5 AA batteries with a regulated 5V rail for logic components and shall operate for at least 30 minutes.
HRS-06	The joystick shall provide two analog voltage output readable by the ATmega328PB ADC channels. A separate button shall control mode switches.
HRS-07	The system shall support an ESP32 with 3.3V supply communicating with ATmega328PB over UART.

7. Bill of Materials (BOM)

The B.A.T.R.A. system requires several major hardware components to meet the stabilization, control, and power requirements defined in the SRS and HRS. The ATmega328PB serves as the main processor, executing bare-metal C firmware that reads sensor data, runs the stabilization control loop, processes joystick input, and generates PWM signals for the servo motors. An ESP32 Feather is also

used for its Wi-Fi connection. It listens to HTTP requests from a webapp and communicates with the main MCU (ATmega328PB) via UART, allowing for wireless control of the gimbal. To measure the orientation of the camera platform, the system uses an ISM330DHCX 6-DoF IMU, which provides high-resolution accelerometer and gyroscope measurements over the I2C interface. These measurements are used by the control algorithm to estimate pitch and roll and reject disturbances. User input is provided through a two-axis analog joystick module, which connects to the ATmega's ADC channels and allows the operator to command the desired viewing angle, and a momentary pushbutton, which switches between stabilization modes. Mechanical actuation is provided by two TowerPro SG-5010 servo motors, which receive PWM control signals from the MCU and rotate the pitch and roll axes of the gimbal frame to maintain or adjust the camera's orientation. The mechanical structure consists of a two-axis gimbal frame and camera mounting plate, which physically support the camera and allow independent pitch and roll motion. Finally, the system is powered by a five-AA battery pack supplying a 5V buck converter, which provides a stable regulated voltage rail for the MCU, sensors, and actuators while accommodating the current spikes required by the servos. Together, these components enable real-time sensing, control, and mechanical stabilization of the camera platform.

Link to google sheet BOM: [here](#)

8. Final Demo Goals

On demo day, B.A.T.R.A. will be demonstrated as a handheld two-axis stabilized camera platform. The gimbal assembly will be mounted to a small handle so that one team member can manually shift the angle by tilting and rotating the device while the stabilization system actively compensates to keep the camera level.

During the demonstration, the system will be operated in two modes through both hardware (joystick and button) as well as through remote control:

Stabilized Hold Mode:

The gimbal will maintain the current pitch and roll orientation even when the user tilts the base by up to 15 degrees. This will demonstrate the IMU-based stabilization and PID control loop rejecting disturbances.

Joystick Control Mode:

The analog joystick will allow the user to adjust the desired viewing angle of the camera while stabilization remains active. The camera will smoothly move to the new commanded pitch and roll angles while continuing to reject disturbances.

The demo will take place indoors on a tabletop and does not require outdoor space. The system will be powered by a battery pack, allowing it to operate without external power during the demonstration.

To visually verify stabilization performance, a small camera (or weighted payload representing a camera) will be mounted to the gimbal. The stabilization will be demonstrated by manually rotating the base platform and showing that the camera mount remains approximately level relative to gravity.

9. Sprint Planning

Milestone	Functionality Achieved	Distribution of Work
Sprint #1	We want to finish the software that allows us to calculate the needed rotation on the servos. We want to have the peripherals connected to the controller in order to check preliminary activity and movement of the servos as the pitch and the roll of the handle changes.	Max will focus on the implementation of the primary algorithm to calculate the servo orientation with relation to the camera's positioning. Eugene will focus on the hardware by soldering the peripherals together and setting up the ESP32's functionality. Ishan will try and finish the preliminary design and functionality for the web application.
Sprint #2	At this point, we would like to have the 3D printing for the chassis be completely complete. This will allow us to attempt to put the final product together as we put in the MCU and the other peripherals into the allocated space within the device frame.	Ishan will work on the design of the platform in CAD. Eugene will work on the design of the handle and the rod connecting the two servo motors together. Max will focus on the design of the enclosure for the servo motors themselves.
MVP Demo	We would like to be able to place a camera on our device and record the footage that out at this stage. This will allow us to test and make any changes to the software and algorithm as necessary. Finally, we would also like to have the web application working at this stage to enable remote control of our gimbal system.	Max will continue with debugging and testing of the core software algorithm. Eugene will work on the final CAD schematic of the enclosure to make sure the device is comfortable to use and appropriately sized. Ishan will finish the web application and ensure that it has functionality.

Milestone	Functionality Achieved	Distribution of Work
Final Demo	At this point, we would like to have the entire system working. We will display how recorded footage from our camera ends up looking more stablized following the demonstration of our gimbal. We will also display the ability of our web application to control the device remotely, allowing for users to see how they can manipulate and use the device in different ways.	Max will continue with debugging and testing of the core software with the servo motors. Eugene and Ishan will make sure that the mode-switching functionality and the joystick work as expected both through the web application and through hardware.

This is the end of the Project Proposal section. The remaining sections will be filled out based on the milestone schedule.

Sprint Review #1

We completed the sprint review with Aarti on 4/3 at 11:15 AM!

Last week's progress

We designed quick CAD files meant for some basic servos that we found in Detkin. This will serve as a proof of concept to allow one of our members to focus on the PID algorithm while the other members focus on mechanical design and the web-based functionality. We also designed some basic CAD files for the actual gimbal, and will resize the enclosure depending on the final camera with that we choose for the MVP and final product.

Current state of project

From a software perspective, we have a lot of work in regards to designing the PID algorithm and the web application for the virtual control. That will be the main focus going forward into the next week.

The hardware seems to be mostly working at this point in time. We are planning on just normally using the ATmega and the ESP32, without too much in the way of complex schematic design or wiring.

We have a decent amount of work to do in relation to the mechanical design of the project. We need to finish ordering parts, designing an enclosure for our MCUs, and figuring out which camera we want to use within our already CAD-ded enclosure. This will be a big focus for two of our team members.

Next week's plan

Max: Work on tuning the PID algorithm and get a working version complete with an IMU and a Go-Pro camera.

Ishan: Work on the web based functionality and have it work with the currently printed PID tester.

Eugene: Focus on mechanical design through CAD of an MCU enclosure and finalize parts for mechanical design.

Sprint Review #2

Last week's progress

Current state of project

Next week's plan

MVP Demo

Final Report

Don't forget to make the GitHub pages public website!

If you've never made a GitHub pages website before, you can follow this webpage (though, substitute your final project repository for the GitHub username one in the quickstart guide):

<https://docs.github.com/en/pages/quickstart>

1. Video

2. Images

3. Results

3.1 Software Requirements Specification (SRS) Results

ID	Description	Validation Outcome
SRS-01	The IMU 3-axis acceleration will be measured with 16-bit depth every 100 milliseconds +/-10 milliseconds.	Confirmed, logged output from the MCU is saved to "validation" folder in GitHub repository.

3.2 Hardware Requirements Specification (HRS) Results

ID	Description	Validation Outcome
HRS-01	A distance sensor shall be used for obstacle detection. The sensor shall detect obstacles at a maximum distance of at least 10 cm.	Confirmed, sensed obstacles up to 15cm. Video in "validation" folder, shows tape measure and logged output to terminal.

4. Conclusion

References