


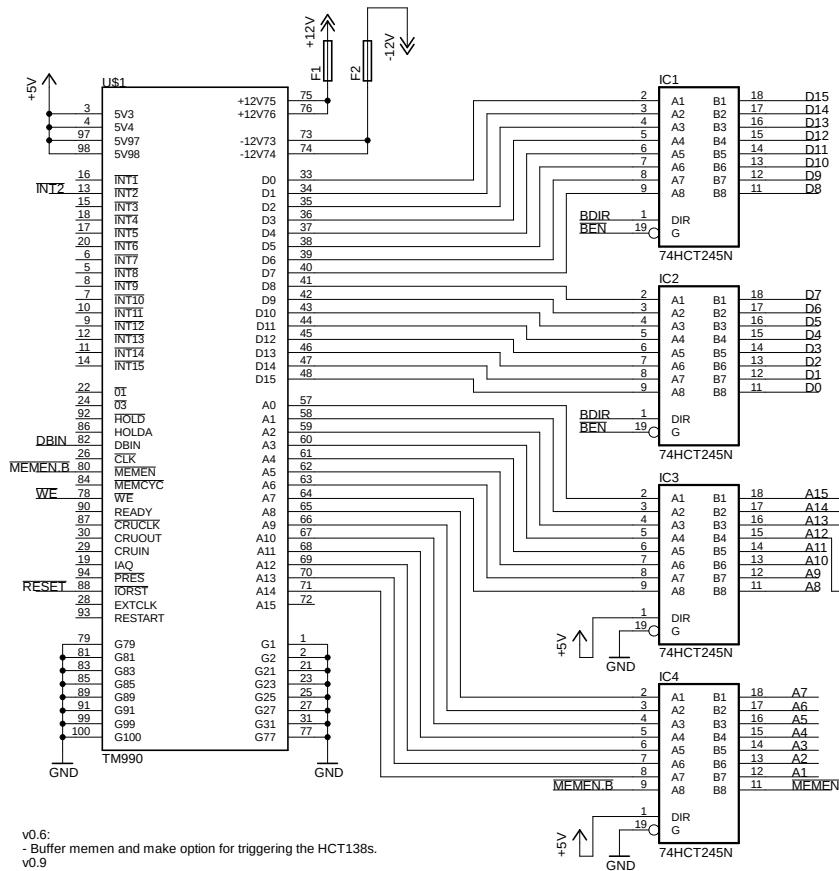


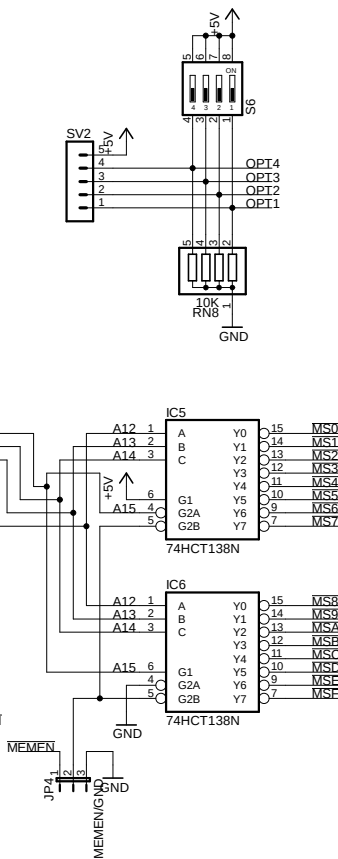



v0.6:
 - Buffer memen and make option for triggering the HCT138s.
 v0.9
 - Fix missing ground to the multimod sockets
 v0.10
 - Add pull-downs to adc inputs

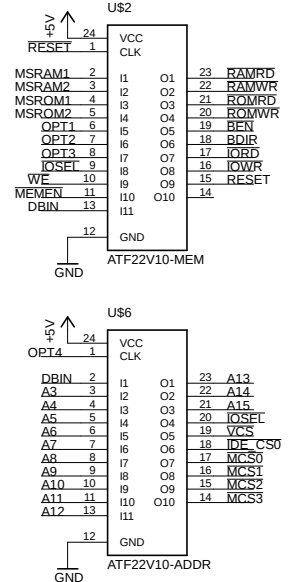






Note: All data and address buses use normal sane rational person numbering, not crazy person inverted TI numbering.

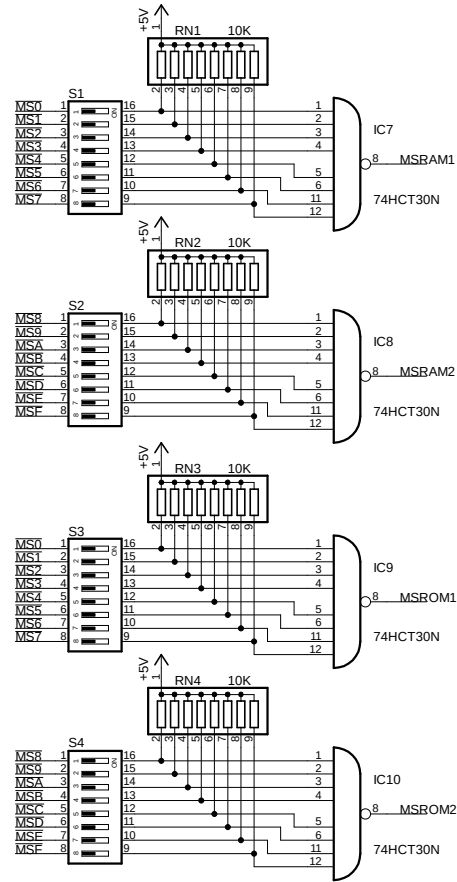

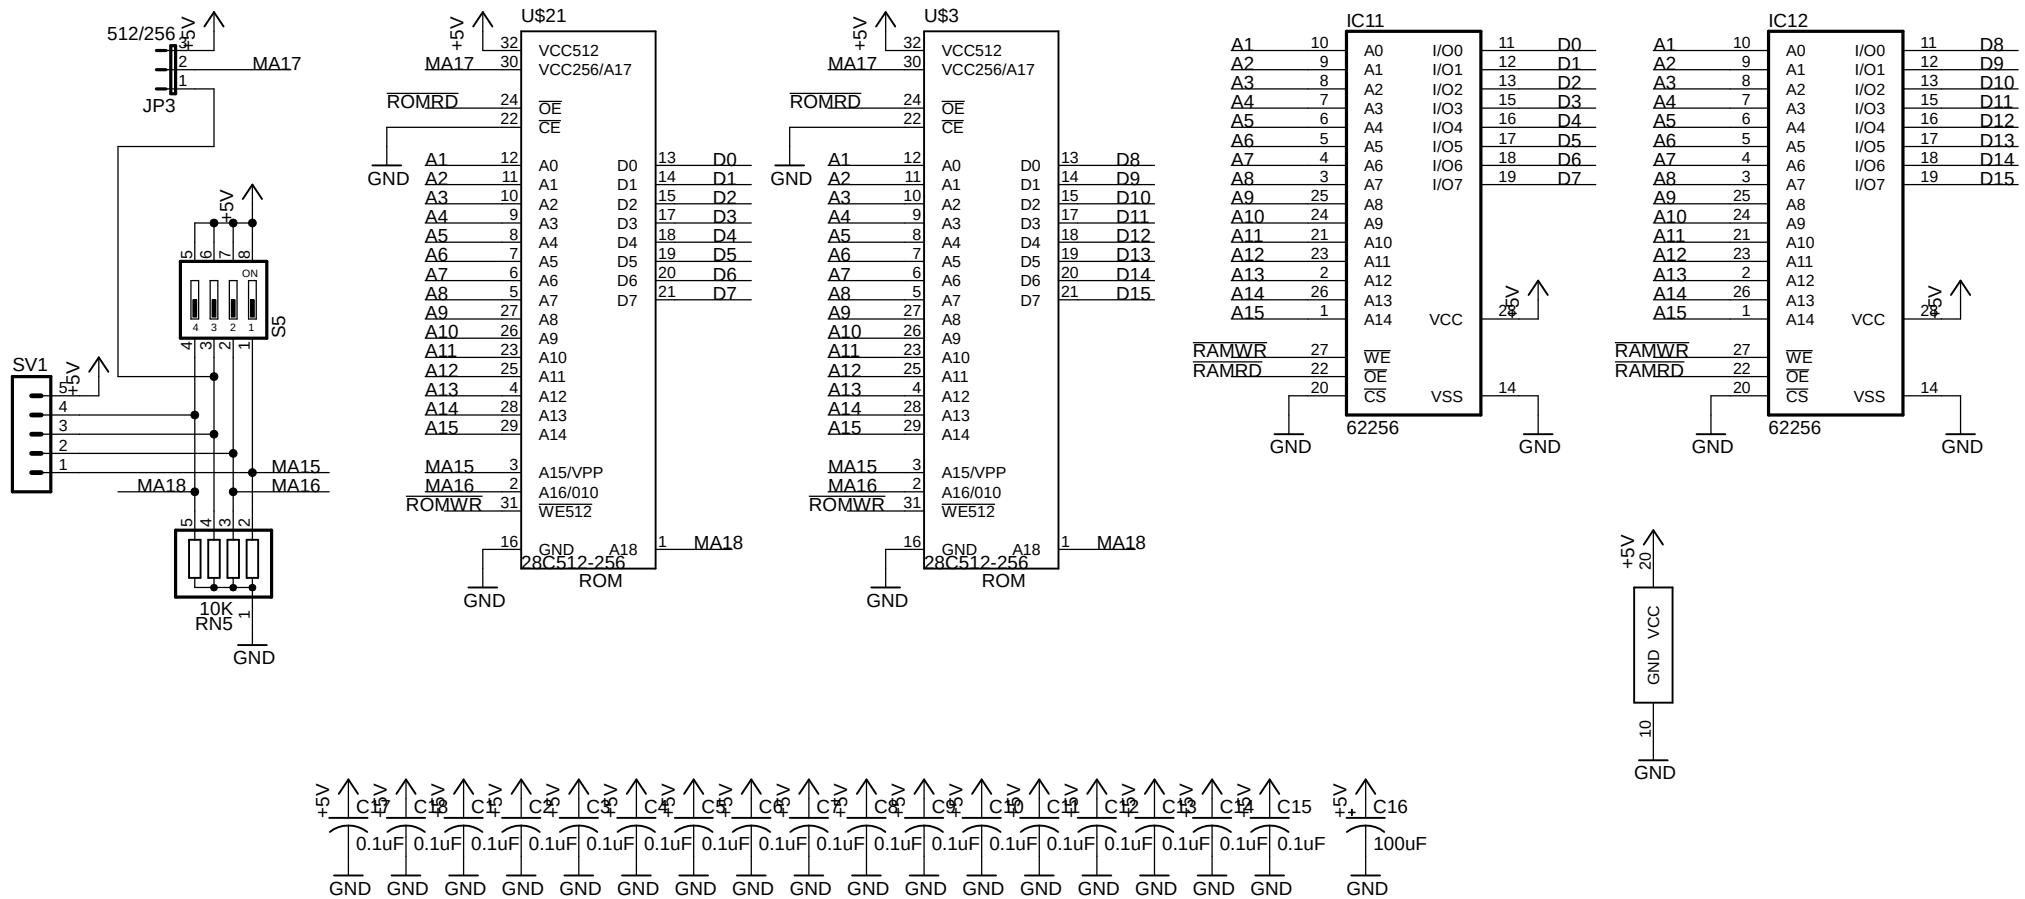


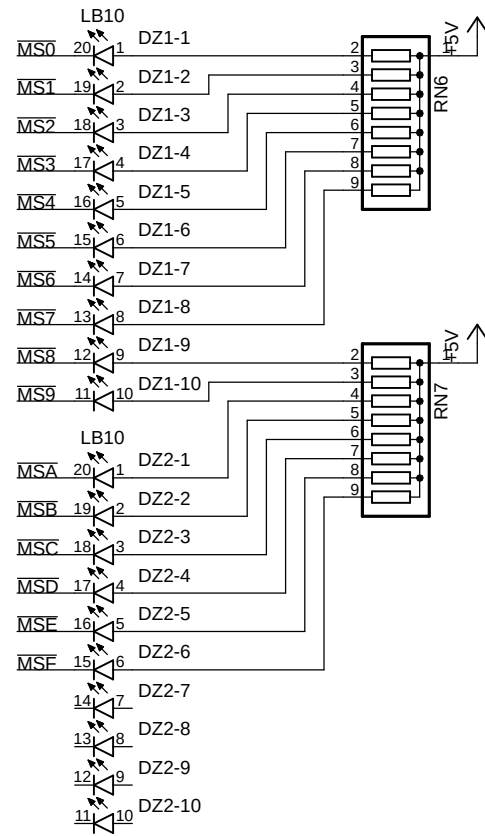

XXX MISSING GND

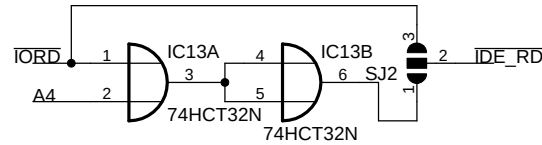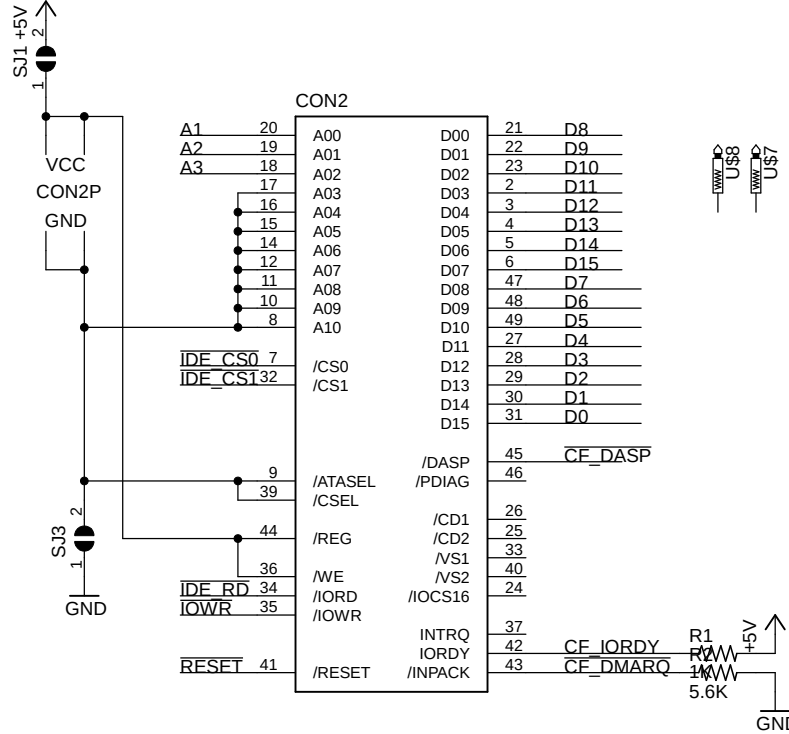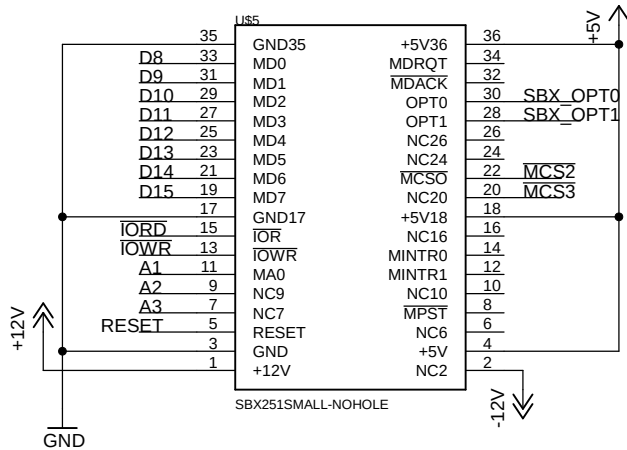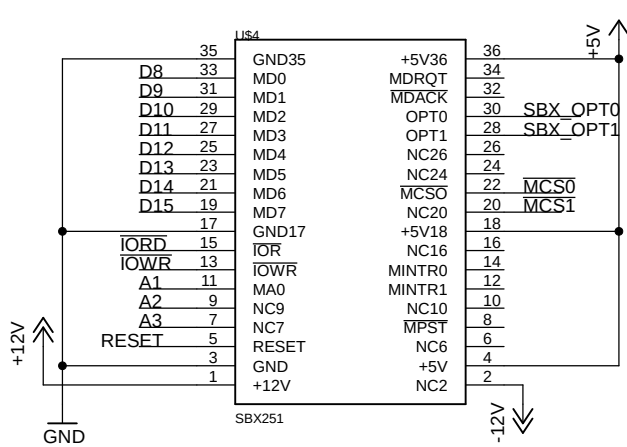

Note: See Stuart's description of read-before-write on his IDE board. May be able to wire 1-11 and eliminate this IC, if we program the PLDs such that I0SEL is not asserted if A11 is high, and if the other PLD only does IORD if I0SEL is active.

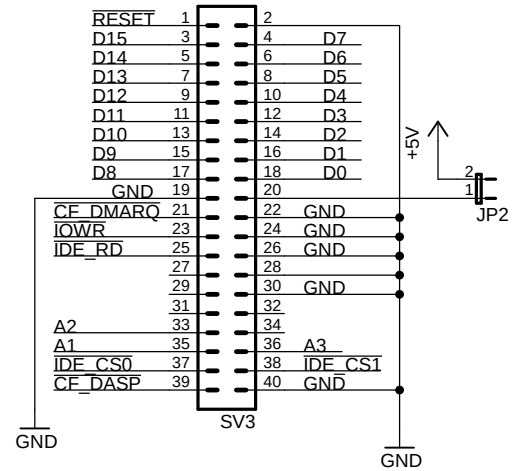

JP2 - Power to 34-pin connector

