




輸出端(output)

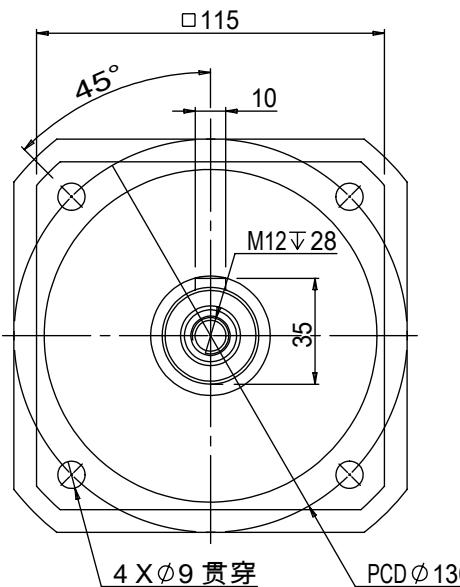

179.5

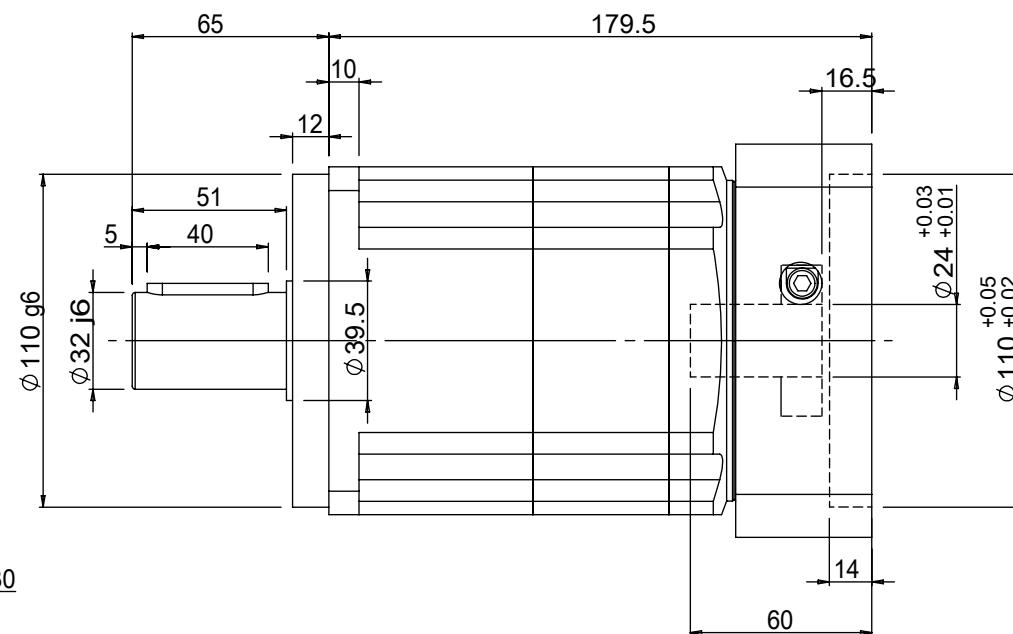

輸入端(input)

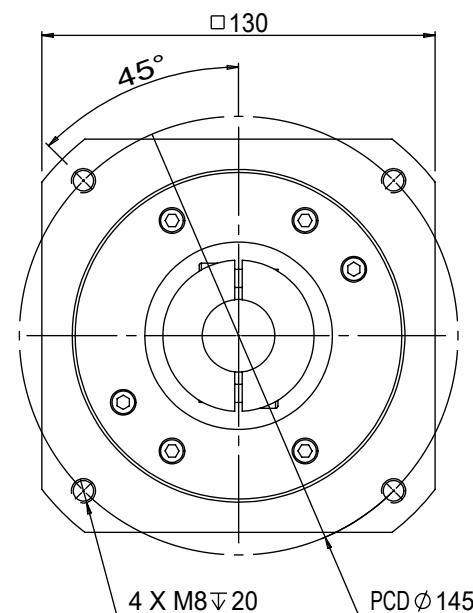急停扭矩
(Emergency Stop Torque)3倍額定輸出力矩
(3 times rated output torque)額定輸入轉速
(Rated input speed)

4000rpm

最大輸入轉速
(Maximum input speed)

8000rpm

背隙
(Dorsal gap)P1 ≤5arcmin
P2 ≤8arcmin容許徑向力
(Allowable radial force)

6700N

容許軸向力
(Allowable axial force)

3350N

使用壽命
(Service life)

20000hr

效率
(Efficiency)

≥94%

使用溫度範圍
(Operating temperature range)

-10°C~90°C

防護等級
(protection class)

IP65

噪音值
(Noise value)

≤63dB

安裝方式
(Installation DIRECTION)

任意(Arbitrarily)

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100
額定輸出力矩 (Rated output torque)	208Nm	290Nm	330Nm	208Nm	300Nm	260Nm	330Nm	300Nm	230Nm

---	2021-2-1	00初版	陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPB115-L2-(24-110-145-M8)
-------------	---------------------------

吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4