

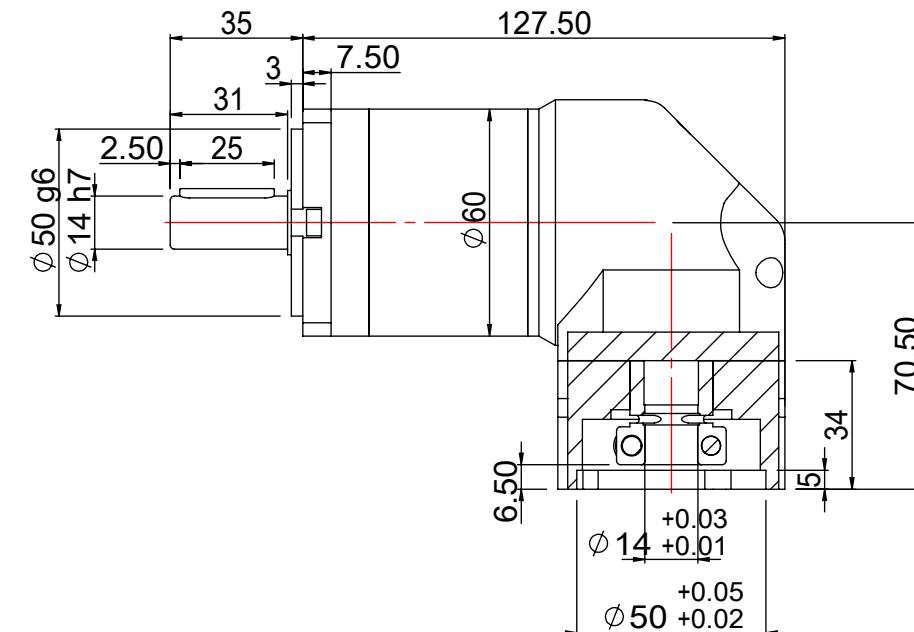


## 輸出端(output)

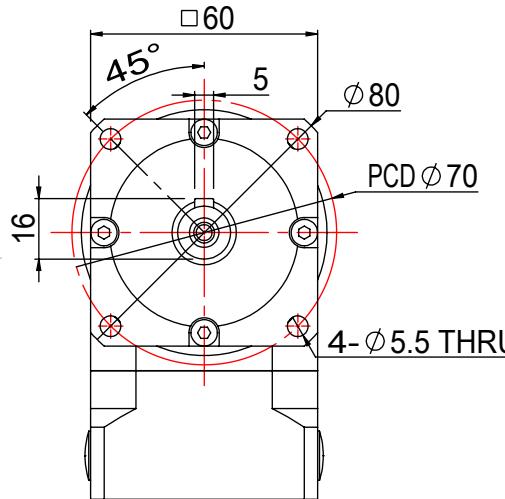

## 輸入端(input)

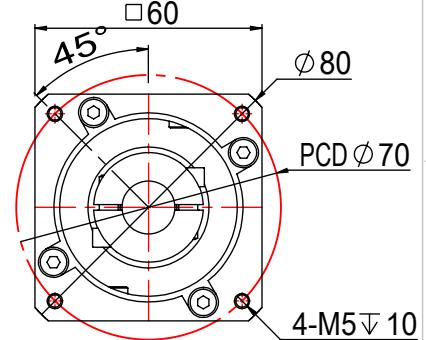

B

A

C

B

D

C

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	4000rpm
背隙 (Dorsal gap)	≤12arcmin
容許徑向力 (Allowable radial force)	220N
容許軸向力 (Allowable axial force)	240N
使用壽命 (Service life)	10000hr
效率 (Efficiency)	≥93%
使用溫度範圍 (Operating temperature range)	-10°C~80°C
防護等級 (protection class)	IP65
噪音值 (Noise value)	≤61dB
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100	140	200
額定輸出力矩 (Rated output torque)	36Nm	55Nm	22Nm								

---	2018-12-26	00初版	陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPFR060-L2- ( 14-50-70-M5 )
-------------	-----------------------------



吉嘉精密科技有限公司  
GIGA Precision Technology Co., Ltd

A4