
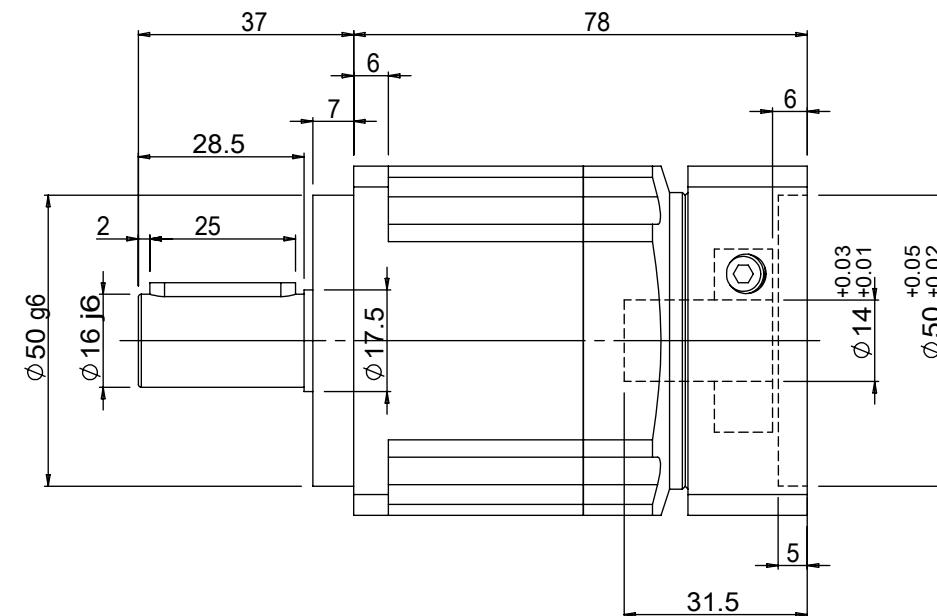
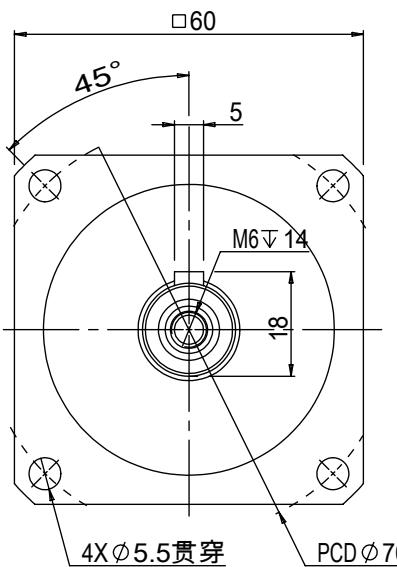


輸出端(output)

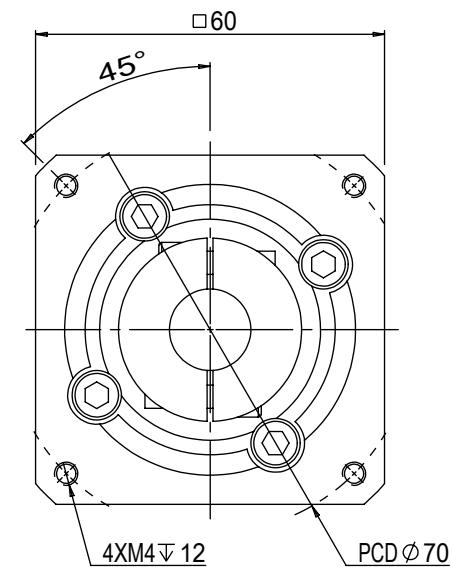

輸入端(input)

急停扭矩
(Emergency Stop Torque)3倍額定輸出力矩
(3 times rated output torque)額定輸入轉速
(Rated input speed)

5000rpm

最大輸入轉速
(Maximum input speed)

10000rpm

背隙
(Dorsal gap)P1 ≤3arcmin
P2 ≤5arcmin容許徑向力
(Allowable radial force)

1530N

容許軸向力
(Allowable axial force)

765N

使用壽命
(Service life)

20000hr

效率
(Efficiency)

≥97%

使用溫度範圍
(Operating temperature range)

-10°C~90°C

防護等級
(protection class)

IP65

噪音值
(Noise value)

≤58dB

安裝方式
(Installation DIRECTION)

任意(Arbitrarily)

減速比
(Speed ratio)

3 4 5 7 10

額定輸出力矩
(Rated output torque)

55Nm 50Nm 60Nm 50Nm 40Nm

--- 2021-2-1 00初版 陳國棟

改版 年月日 變更事項 設計 備注
SYM DATE REVISIONS BY NOTE制圖 PRAWN 設計 DESIGNED 品名: TITLE 精密行星減速機
Precision Planetary Gear Reducer

規格: SPEC 規格: SPEC GPB060-L1-(14-50-70-M4)

G+® 吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd A4