

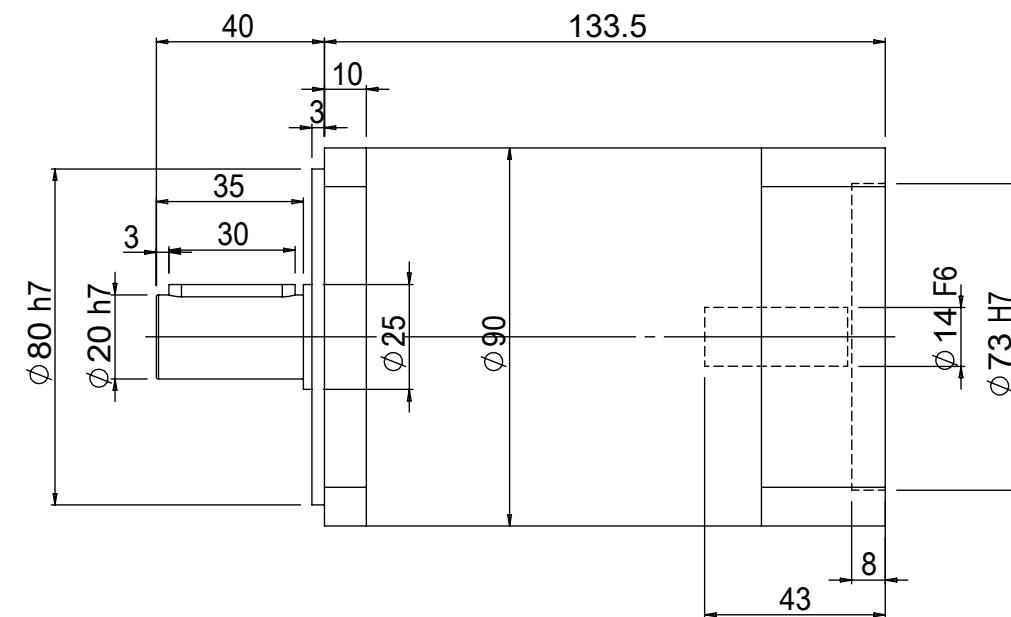


輸出端(output)

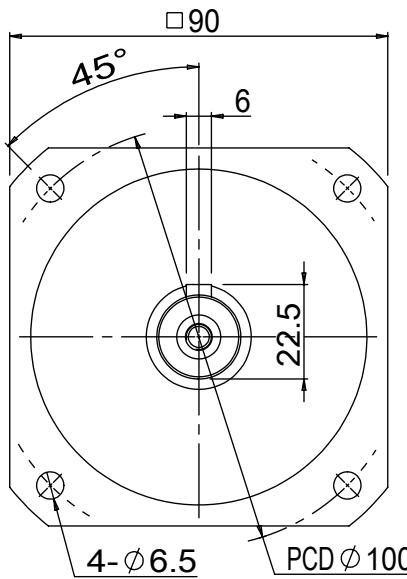

輸入端(input)

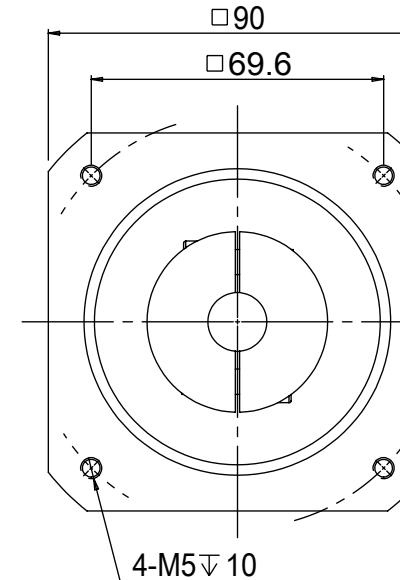

急停扭矩 (Emergency Stop Torque)	2倍額定輸出力矩 (2 times rated output torque)
額定輸入轉速 (Rated input speed)	3000rpm
背隙 (Dorsal gap)	≤10arcmin
容許徑向力 (Allowable radial force)	1300N
容許軸向力 (Allowable axial force)	1100N
使用壽命 (Service life)	20000h
效率 (Efficiency)	≥94%
使用溫度範圍 (Operating temperature range)	-25°C~90°C
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	12	16	20	25	28	35	40	50	70
額定輸出力矩 (Rated output torque)	98Nm	98Nm	98Nm	105Nm	98Nm	105Nm	98Nm	105Nm	75Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE
制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer	
		規格: SPEC	GPF090-L2-(14-73-□69.6-M5)	
			G+® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	A4
1	2	3	4	比例SCALE:1:2 图纸 1 (共1)