

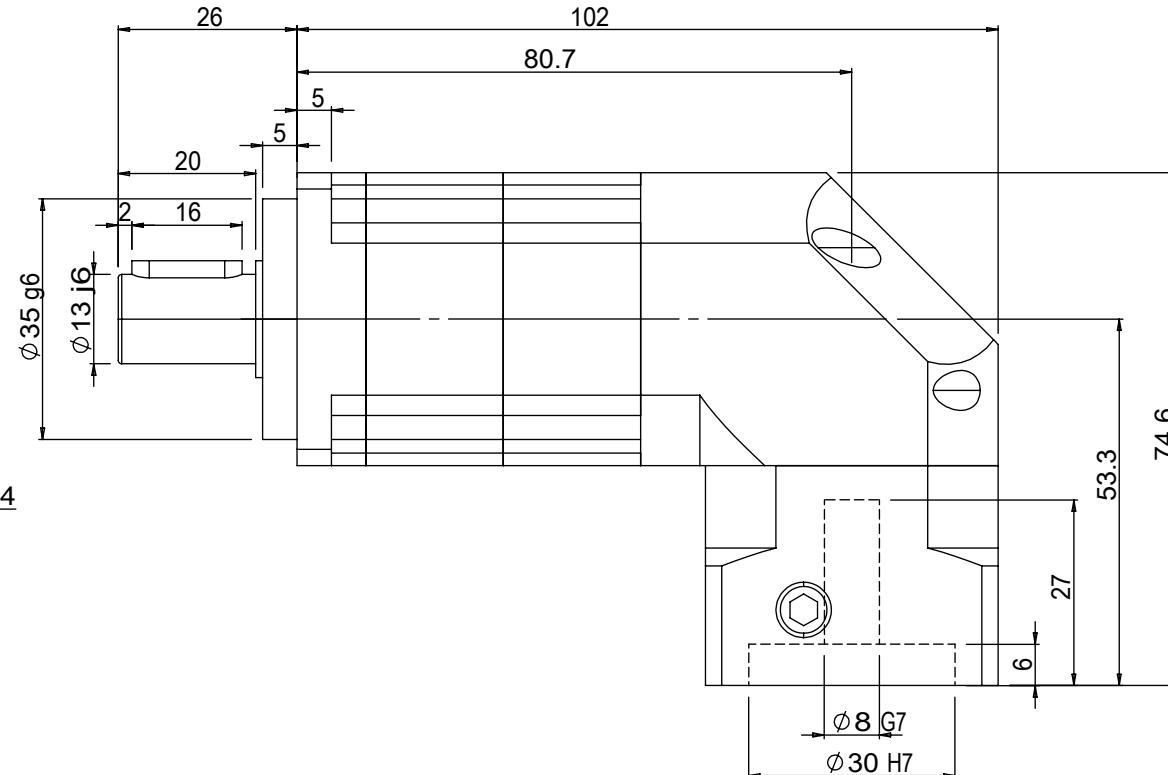


1 2 3 4 5 6

輸出端(output)

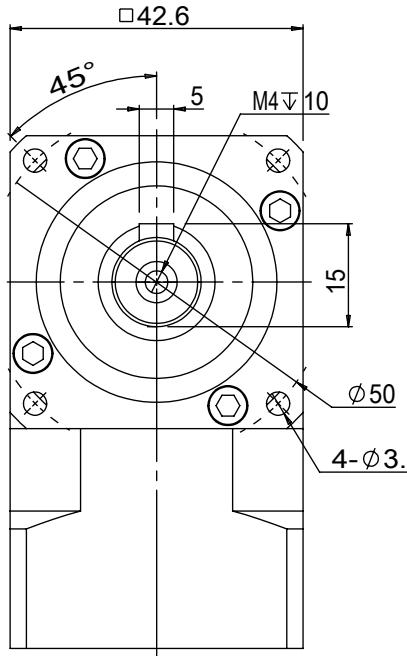

輸入端(input)

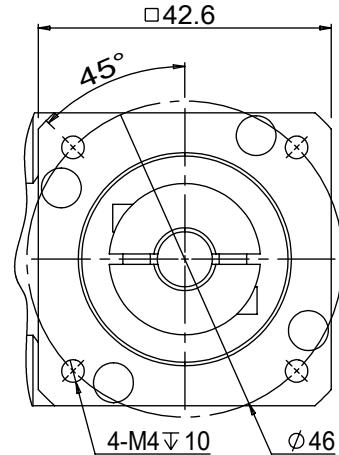

A

A

B

B

C

C

D

D

急停扭矩 (Emergency Stop Torque)	2倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	3000rpm
最大輸入轉速 (Maximum input speed)	6000rpm
背隙 (Dorsal gap)	≤9arcmin
容許徑向力 (Allowable radial force)	700N
容許軸向力 (Allowable axial force)	610N
使用壽命 (Service life)	20000hr
效率 (Efficiency)	≥92%
使用溫度範圍 (Operating temperature range)	-15°C~90°C
防護等級 (protection class)	IP65
噪音值 (Noise value)	≤60dB
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	12	15	16	20	25	28	30	35	40	50	70	100
額定輸出力矩 (Rated output torque)	19Nm	19Nm	20Nm	20Nm	19Nm	19Nm	20Nm	20Nm	20Nm	20Nm	19Nm	14Nm

改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE
----- 2018-12-26 00初版 陳國棟 -----				

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPBR042-L2-(8-30-46-M4)
G+ ® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4

1 2 3 4 5 6 比例SCALE:1:2 图纸 1 (共1)