

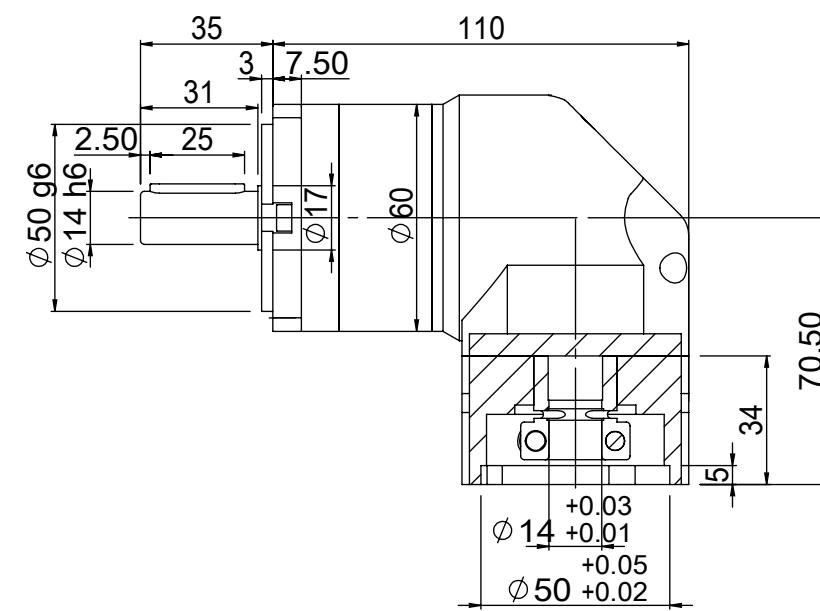


輸出端(output)

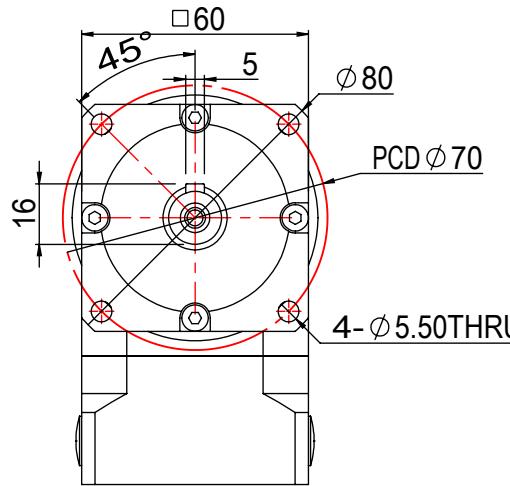

輸入端(input)

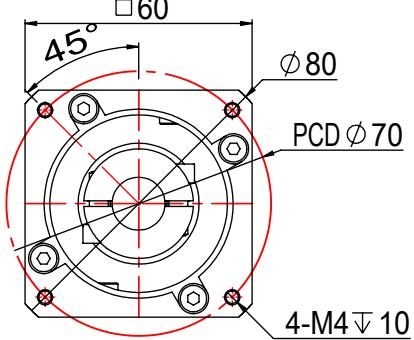

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	4000rpm
背隙 (Dorsal gap)	≤10arcmin
容許徑向力 (Allowable radial force)	220N
容許軸向力 (Allowable axial force)	240N
使用壽命 (Service life)	10000hr
效率 (Efficiency)	≥96%
使用溫度範圍 (Operating temperature range)	-10°C~80°C
防護等級 (protection class)	IP65
噪音值 (Noise value)	≤61dB
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	3	4	5	7	10
額定輸出力矩 (Rated output torque)	18Nm	36Nm	40Nm	20Nm	12Nm

--- 2018-12-26 00初版 陳國棟
改版 SYM 年月日 DATE 變更事項 REVISIONS 設計 BY 備注 NOTE

制圖 PRAWN 設計 DESIGNED 品名: TITLE 精密行星減速機 Precision Planetary Gear Reducer

規格: SPEC GPFR060-L1- (14-50-70-M4)



吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4