
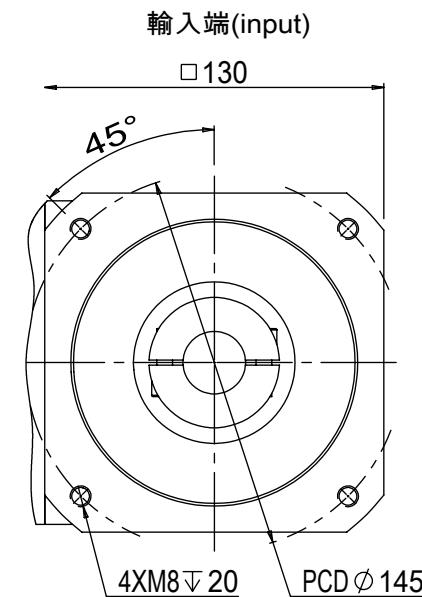
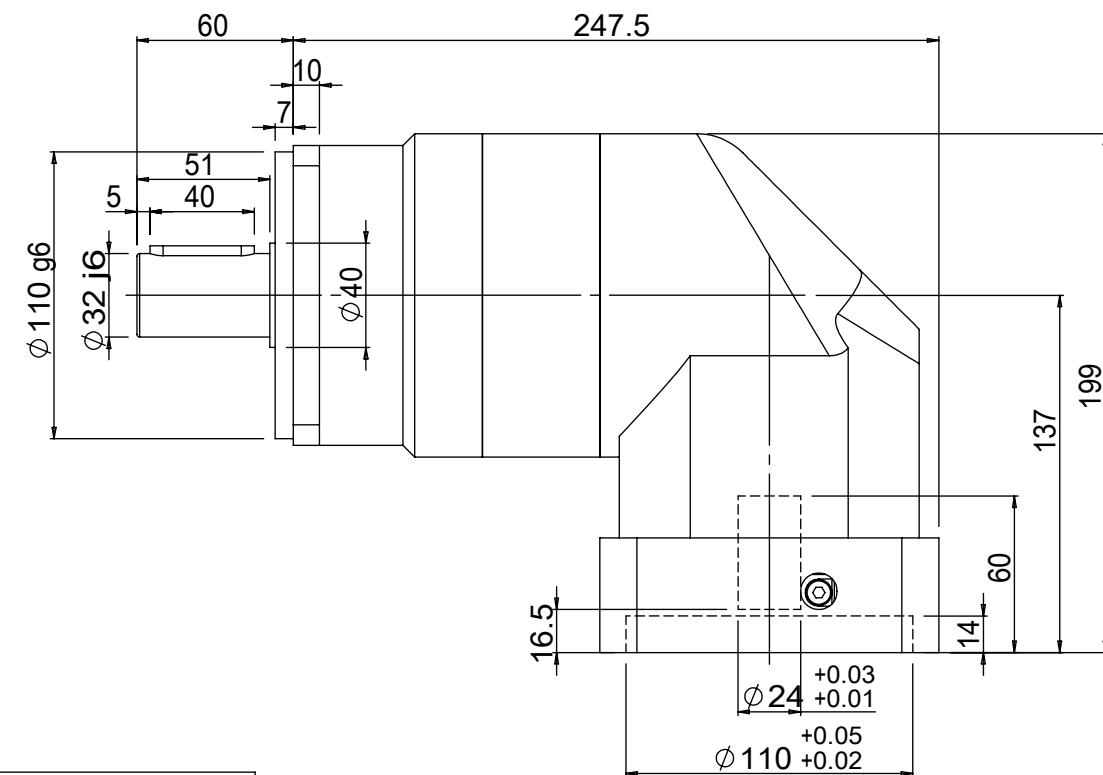


1 2 3 4 5 6

## 輸出端(output)

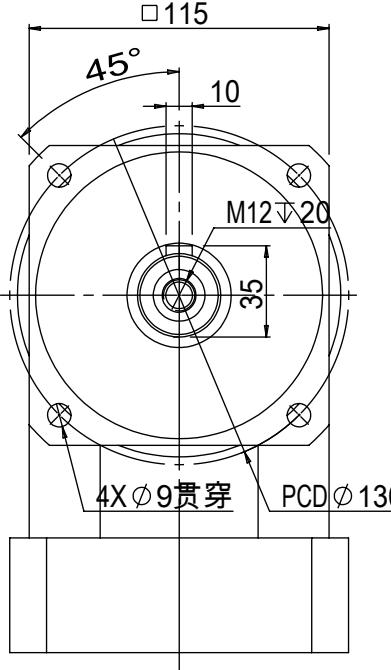

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	4000rpm	
最大輸入轉速 (Maximum input speed)	8000rpm	
背隙 (Dorsal gap)	P1	≤9arcmin
	P2	≤11arcmin
容許徑向力 (Allowable radial force)	6700N	
容許軸向力 (Allowable axial force)	3350N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	≥92%	
使用溫度範圍 (Operating temperature range)	-10°C~90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	≤68dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	15	25	30	35	40	50	60	70	80	100	140	200
額定輸出力矩 (Rated output torque)	325Nm	325Nm	310Nm	300Nm	260Nm	230Nm	310Nm	300Nm	260Nm	230Nm	300Nm	230Nm

--- 2018-12-26 00初版 陳國棟

改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備註 NOTE
-----------	-------------	-------------------	----------	------------

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer	
		規格: SPEC	GPVR115-L2-(24-110-145-M8)	
		G+®	吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	
			A4	

1 2 3 4 5 6

比例SCALE:1:2

图纸 1 (共1)