

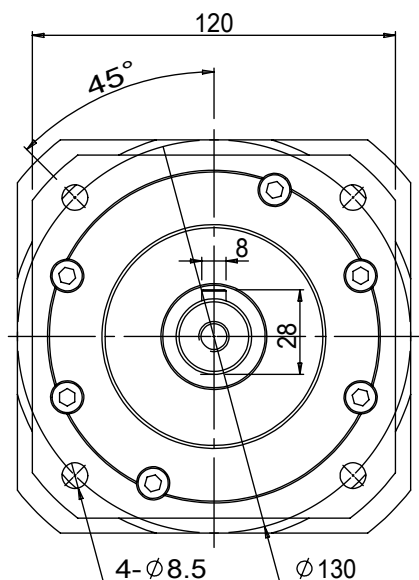


輸出端(output)

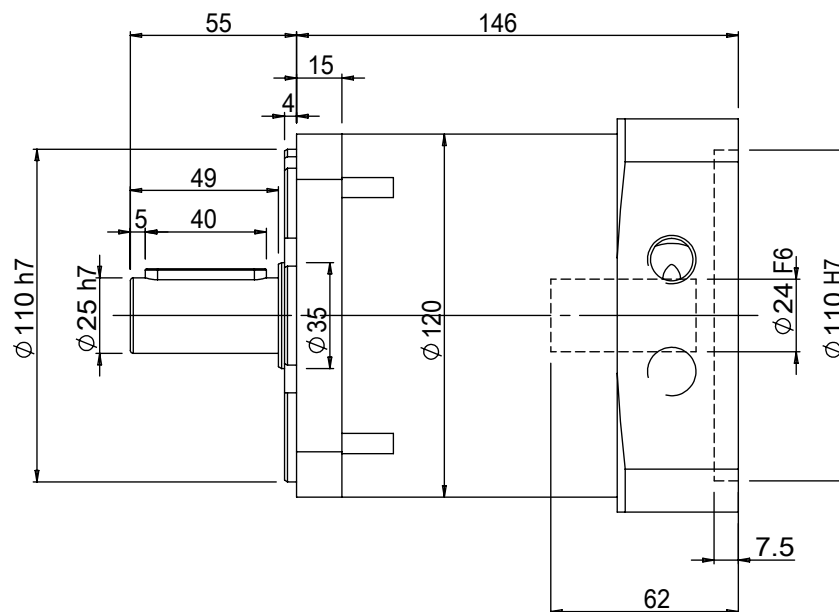

輸入端(input)

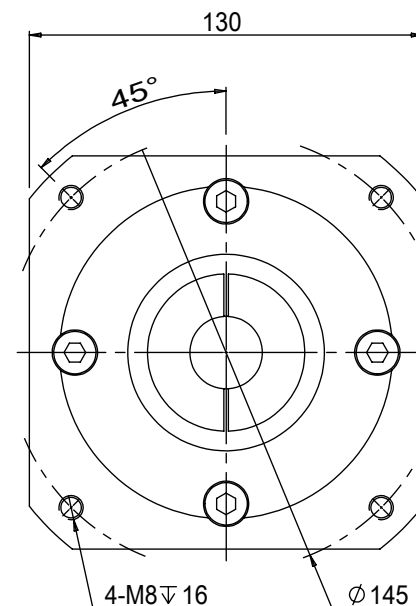

急停扭矩 (Emergency Stop Torque)	2倍額定輸出力矩 (2 times rated output torque)	
額定輸入轉速 (Rated input speed)	3000rpm	
最大輸入轉速 (Maximum input speed)	5000rpm	
背隙 (Dorsal gap)	P2	≤8arcmin
容許徑向力 (Allowable radial force)	2200N	
容許軸向力 (Allowable axial force)	1600N	
使用壽命 (Service life)	20000h	
效率 (Efficiency)	≥96%	
使用溫度範圍 (Operating temperature range)	-25℃~90℃	
防護等級 (protection class)	IP65	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	3	4	5	7	10
額定輸出力矩 (Rated output torque)	150Nm	225Nm	240Nm	160Nm	90Nm

---	2018-12-26	00初版		陳國棟	
改版 SYM	年 月 日 DATE	變更事項 REVISIONS		設計 BY	備 注 NOTE
制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer		
		規格: SPEC	GPF115-L1-(24-110-145-M8)		
		G+ [®] 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4
比例SCALE:1:5		圖紙 1 (共1)			