

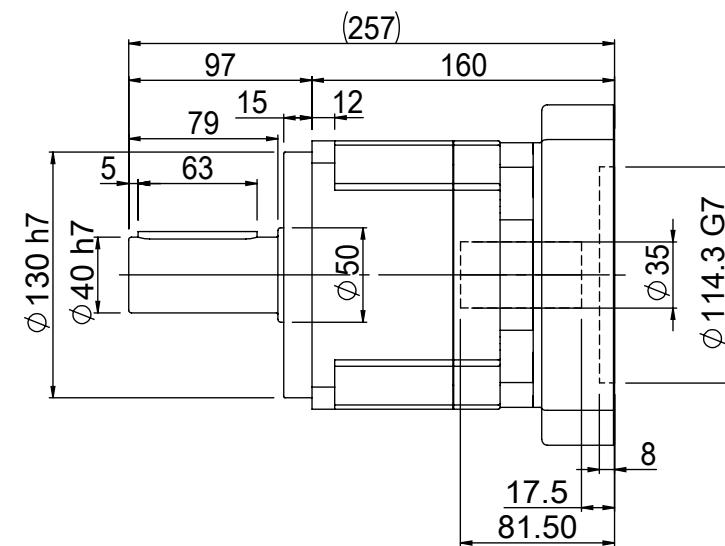


1 2 3 4 5 6

## 輸出端(output)

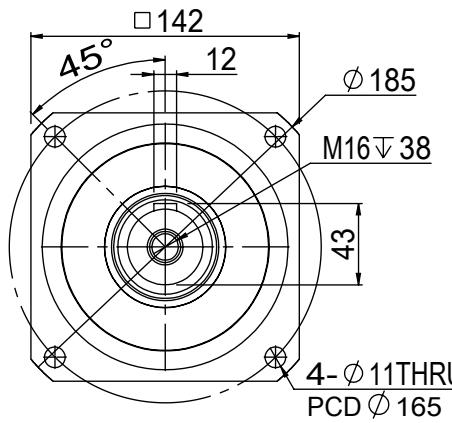

## 輸入端(input)

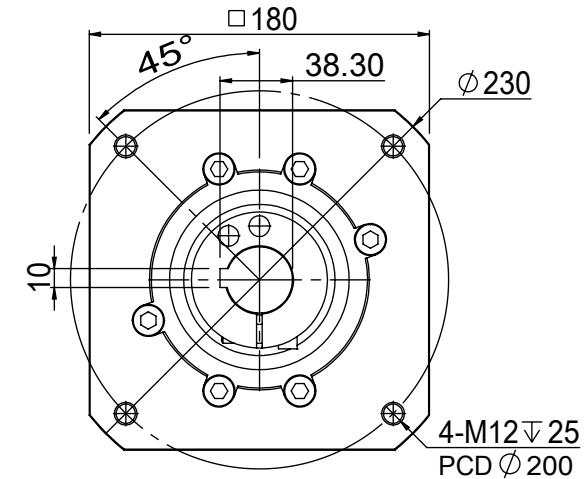

A

A

B

B

C

C

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	3000rpm	
最大輸入轉速 (Maximum input speed)	6000rpm	
背隙 (Dorsal gap)	P1	≤3arcmin
	P2	≤5arcmin
容許徑向力 (Allowable radial force)	9400N	
容許軸向力 (Allowable axial force)	4700N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	≥97%	
使用溫度範圍 (Operating temperature range)	-10°C~90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	≤65dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	3	4	5	7	10
額定輸出力矩 (Rated output torque)	342Nm	543Nm	650Nm	550Nm	450Nm
-----	2018-12-26	00初版	陳國棟		
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE	

制圖  
PRAWN 設計  
DESIGNED 品名:  
TITLE 精密行星減速機  
Precision Planetary Gear Reducer

規格:  
SPEC 規格:  
GPB142-L1-(35-114.3-200-M12)

**G+**® 吉嘉精密科技有限公司  
GIGA Precision Technology Co., Ltd

A4

1 2 3 4 5 6

比例SCALE:1:4

图纸 1 (共1)