

1

2



3

4


5

6

輸出端(output)

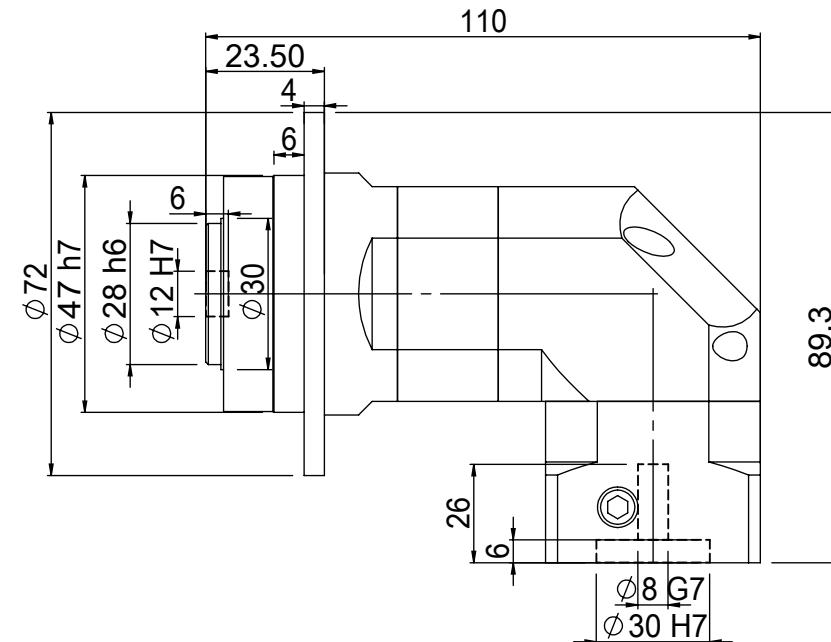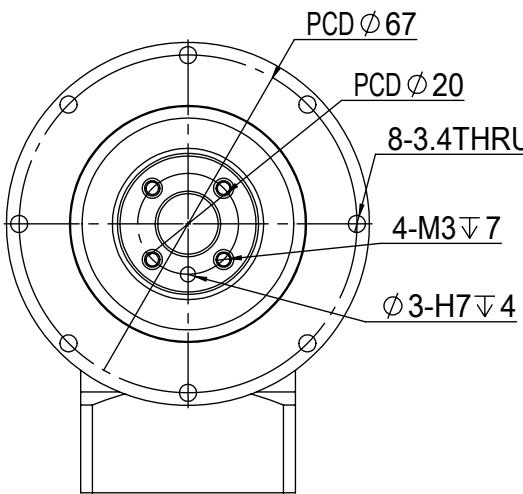

輸入端(input)

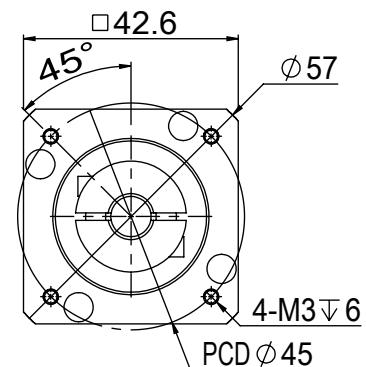

A

B

C

D

A

B

C

1

2

3

4

比例SCALE:1:2

图纸 1 (共1)

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	3000rpm	
最大輸入轉速 (Maximum input speed)	6000rpm	
背隙 (Dorsal gap)	-	≤9arcmin
容許徑向力 (max. radial force)	1200Nm	
容許軸向力 (Allowable axial force)	750N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	≥92%	
使用溫度範圍 (Operating temperature range)	-15°C~90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	≤60dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100			
額定輸出力矩 (Rated output torque)	19Nm	20Nm	20Nm	19Nm	20Nm	20Nm	20Nm	19Nm	14Nm			
改版 SYM	年月日 DATE	變更事項 REVISIONS					設計 BY	備注 NOTE				
制圖 PRAWN		設計 DESIGNED		品名: TITLE		精密行星減速機 Precision Planetary Gear Reducer						
				規格: SPEC		GPDR047-L2-(8-30-45-M3)						
				 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd					A4			