




輸出端(output)

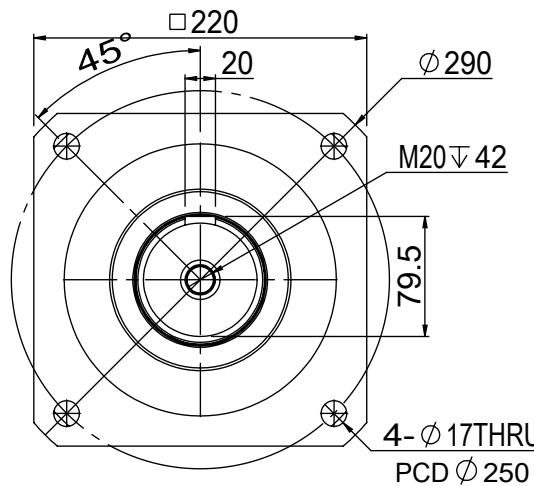

(439.5)

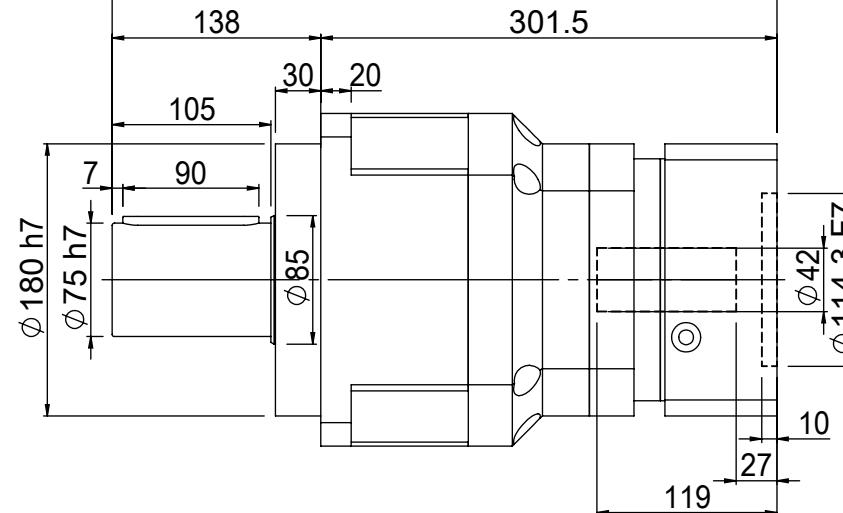

輸入端(input)

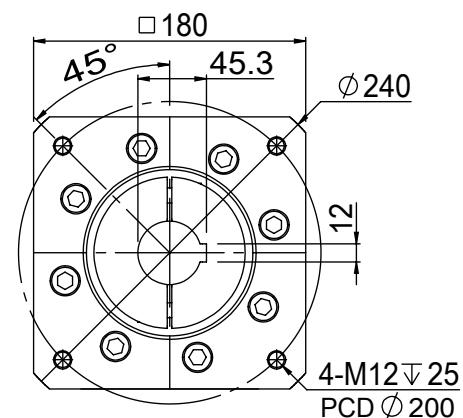

A

A

B

B

C

C

D

D

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	2000rpm	
最大輸入轉速 (Maximum input speed)	4000rpm	
背隙 (Dorsal gap)	P1	≤5arcmin
	P2	≤8arcmin
容許徑向力 (Allowable radial force)	50000N	
容許軸向力 (Allowable axial force)	25000N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	≥94%	
使用溫度範圍 (Operating temperature range)	-10°C~90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	≤70dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100
額定輸出力矩 (Rated output torque)	1140Nm	1700Nm	2000Nm	1900Nm	1800Nm	1600Nm	2000Nm	1800Nm	1500Nm

---	2018-12-26	00初版	陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPB220-L2-(42-114.3-200-M12)
-------------	------------------------------



吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4