

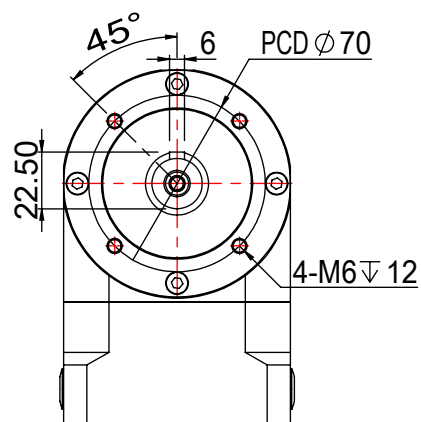


輸出端(output)

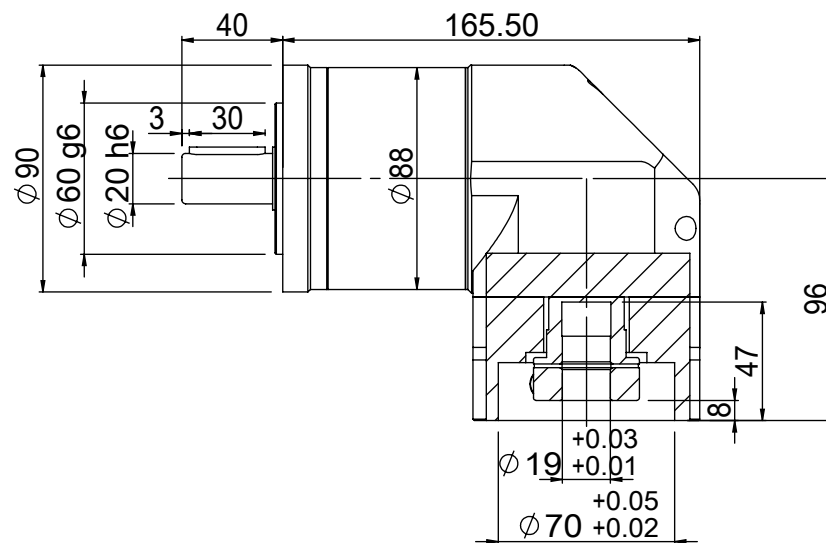

輸入端(input)

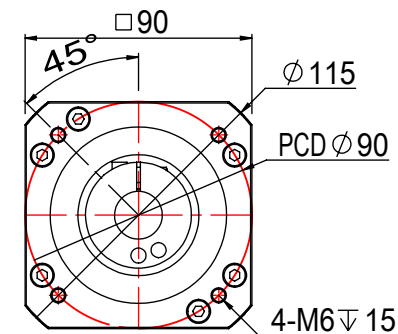

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	3500rpm
背隙 (Dorsal gap)	≤12arcmin
容許徑向力 (Allowable radial force)	400N
容許軸向力 (Allowable axial force)	420N
使用壽命 (Service life)	10000hr
效率 (Efficiency)	≥93%
使用溫度範圍 (Operating temperature range)	-10℃~80℃
防護等級 (protection class)	IP65
噪音值 (Noise value)	≤63dB
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100	140	200
額定輸出力矩 (Rated output torque)	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	55Nm	22Nm

---	2018-12-26	00初版	陳國棟
改版 SYM	年 月 日 DATE	變更事項 REVISIONS	設計 BY
制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPLR090-L2- (19-70-90-M6)
		G+ [®] 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	A4