

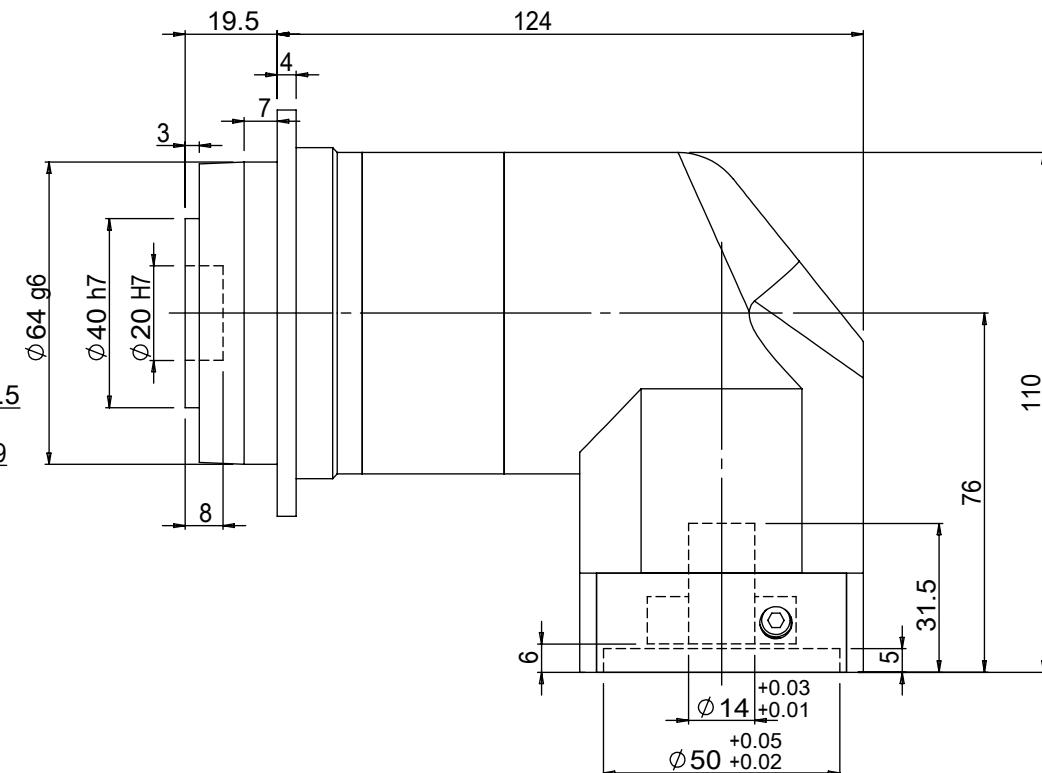


1 2 3 4 5 6

## 輸出端(output)

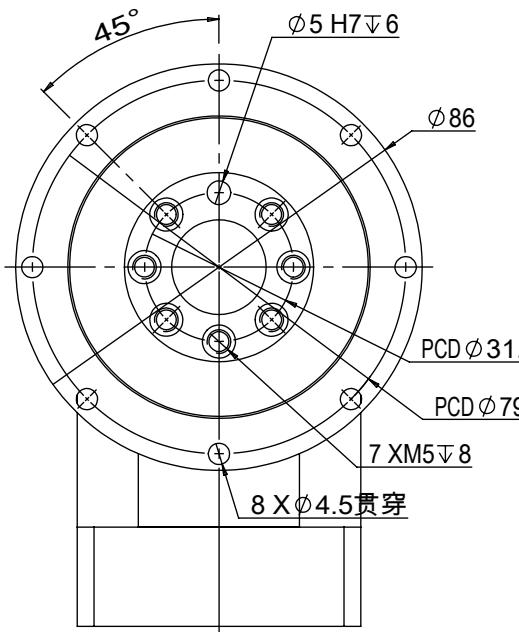

## 輸入端(input)

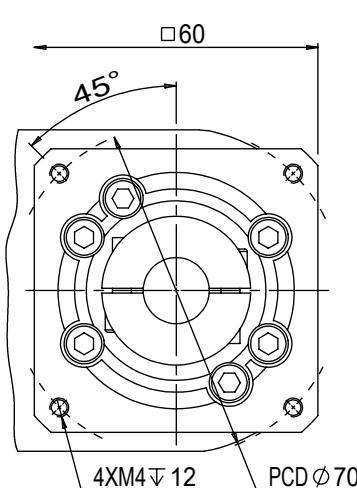

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	5000rpm	
最大輸入轉速 (Maximum input speed)	10000rpm	
背隙 (Dorsal gap)	P1	≤9arcmin
	P2	≤11arcmin
最大彎曲力矩 (maxi bending torque)	125Nm	
容許軸向力 (Allowable axial force)	1050N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	≥92%	
使用溫度範圍 (Operating temperature range)	-10°C~90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	≤63dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	25	35	40	50	70	80	100	140	200					
額定輸出力矩 (Rated output torque)	60Nm	50Nm	48Nm	60Nm	50Nm	45Nm	40Nm	50Nm	40Nm					
---	2021-2-1	00初版				陳國棟								
改版 SYM	年月日 DATE	變更事項 REVISIONS				設計 BY	備注 NOTE							
制圖 PRAWN	設計 DESIGNED		品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer										
規格: SPEC				GPDR064-L2-(14-50-70-M4)										
				吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd										

1 2 3 4 5 比例SCALE:1:2 图纸 1 (共1) A4