



輸出端
(OUTPUT)

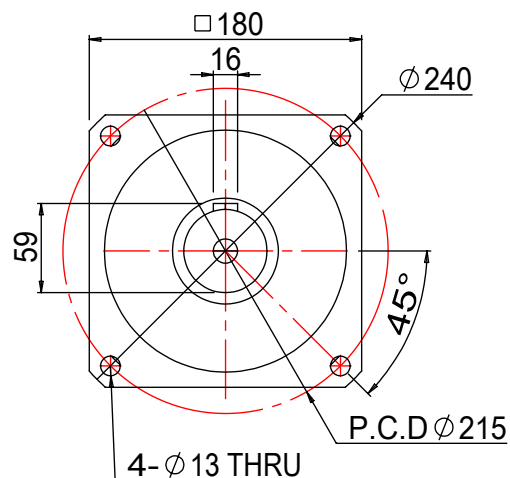


輸入端
(INPUT)

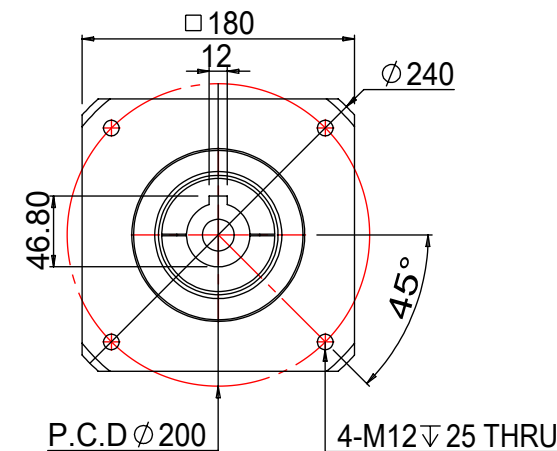

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	2000rpm
最大輸入轉速 (Maximum input speed)	4000rpm
背隙 (Dorsal gap)	≤9arcmin
容許徑向力 (Allowable radial force)	7260N
容許軸向力 (Allowable axial force)	5550N
效率 (Efficiency)	≥92%
使用溫度範圍 (Operating temperature range)	-10℃~+90℃
防護等級 (protection class)	IP65
噪音值 (Noise value)	≤70dB
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100
額定輸出力矩 (Rated output torque)	588Nm	1050Nm	1200Nm	1100Nm	1100Nm	1000Nm	1200Nm	1100Nm	900Nm

---	2018-12-26	00初版	陳國棟
改版 SYM	年 月 日 DATE	變更事項 REVISIONS	設計 BY
制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPB180-L2-(42-114.3-200-M12)
		 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	
			A4