



A


輸出端(output)

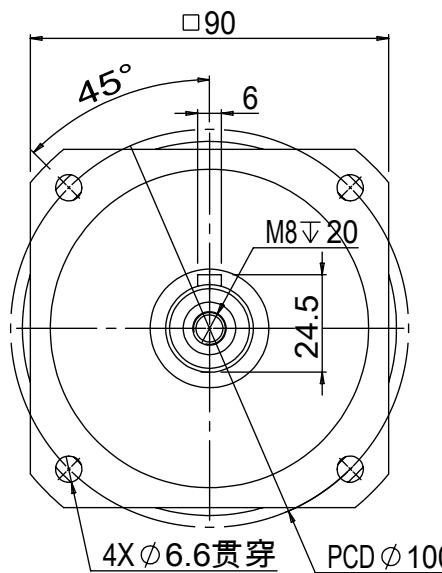

B

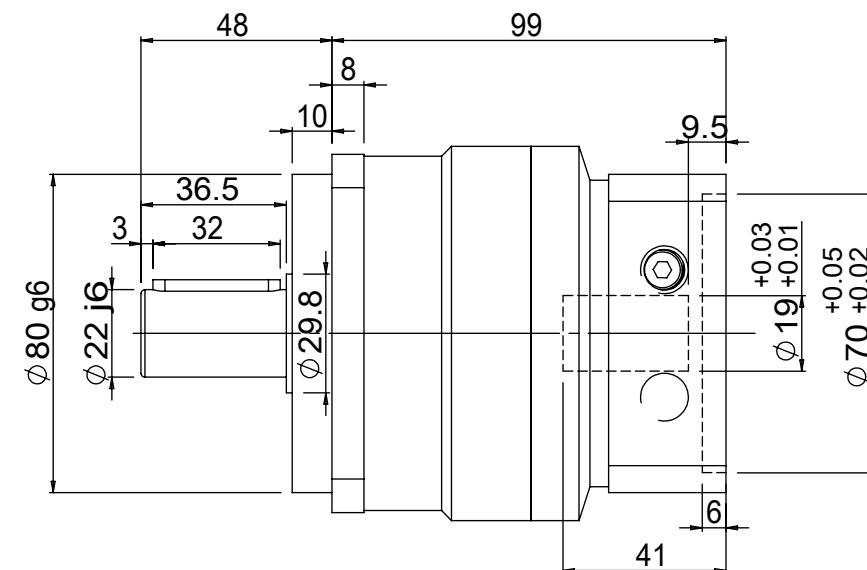

輸入端(input)

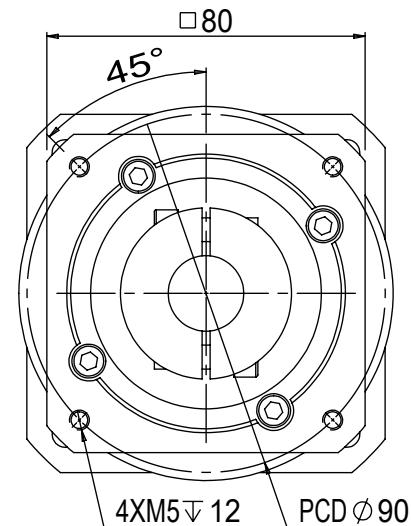

C

急停扭矩
(Emergency Stop Torque)3倍額定輸出力矩
(3 times rated output torque)額定輸入轉速
(Rated input speed)

4000rpm

最大輸入轉速
(Maximum input speed)

8000rpm

背隙
(Dorsal gap)

P1 ≤3arcmin

P2 ≤5arcmin

容許徑向力
(Allowable radial force)

3250N

容許軸向力
(Allowable axial force)

1625N

使用壽命
(Service life)

20000hr

效率
(Efficiency)

≥97%

使用溫度範圍
(Operating temperature range)

-10°C ~ 90°C

防護等級
(protection class)

IP65

噪音值
(Noise value)

≤60dB

安裝方式
(Installation DIRECTION)

任意(Arbitrarily)

	減速比 (Speed ratio)	3	4	5	7	10
	額定輸出力矩 (Rated output torque)	130Nm	140Nm	160Nm	140Nm	100Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPV090-L1-(19-70-90-M5)
-------------	-------------------------



吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4