



A


輸出端(output)

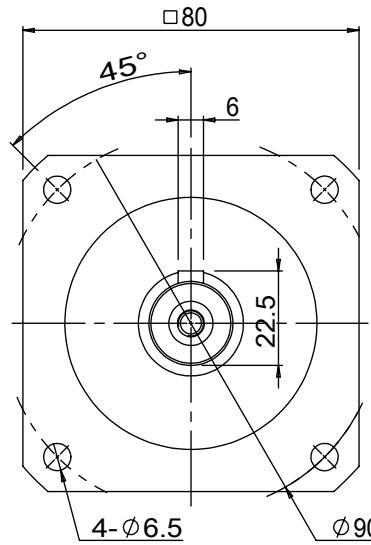

B

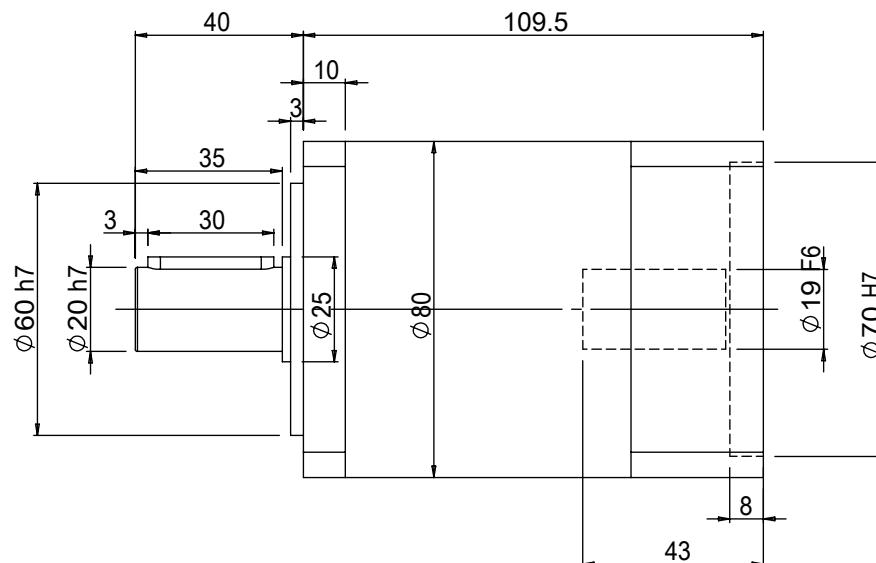

輸入端(input)

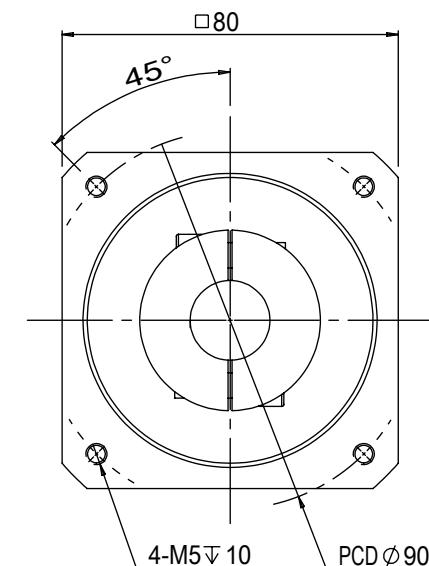

C

急停扭矩 (Emergency Stop Torque)	2倍額定輸出力矩 (2 times rated output torque)
額定輸入轉速 (Rated input speed)	3000rpm
背隙 (Dorsal gap)	$\leq 8\text{arcmin}$

容許徑向力 (Allowable radial force)	1050N
容許軸向力 (Allowable axial force)	850N

使用壽命 (Service life)	20000h
效率 (Efficiency)	$\geq 96\%$

使用溫度範圍 (Operating temperature range)	-25°C ~ 90°C
防護等級 (protection class)	IP65

安裝方式 (Installation DIRECTION)	任意(Arbitrarily)
----------------------------------	-----------------

減速比 (Speed ratio)	3	4	5	7	10
額定輸出力矩 (Rated output torque)	56Nm	80Nm	85Nm	60Nm	36Nm

---	2018-12-26	00初版		陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPF080-L1-(19-70-90-M5)
			吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd