
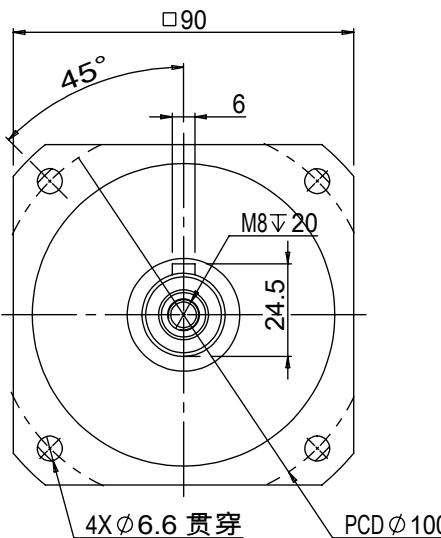
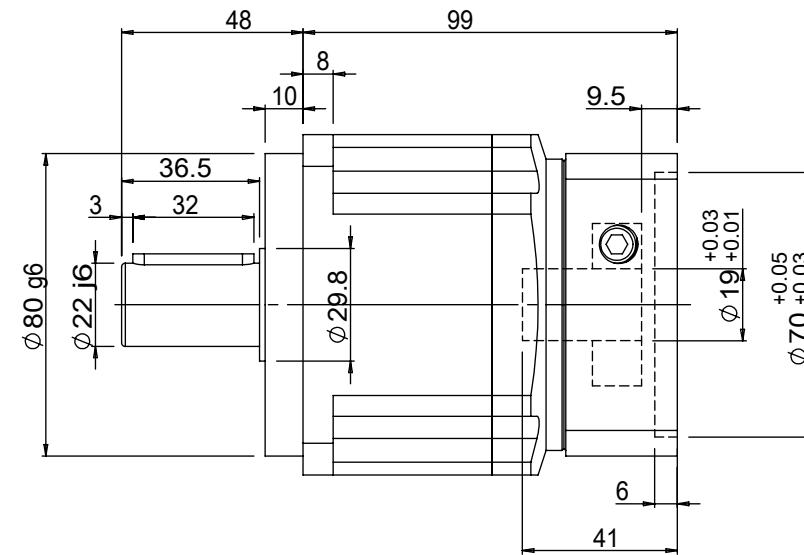


輸出端(output)

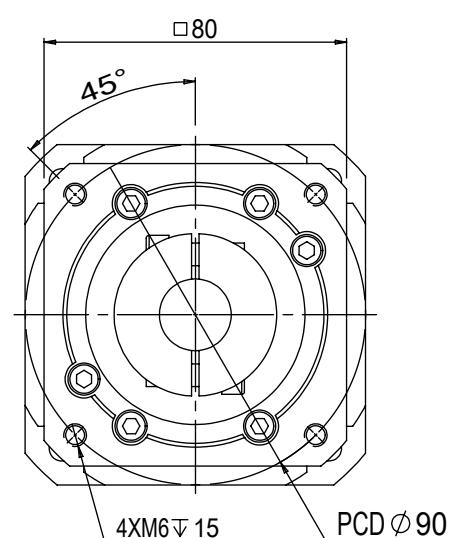

輸入端(input)

急停扭矩
(Emergency Stop Torque)3倍額定輸出力矩
(3 times rated output torque)額定輸入轉速
(Rated input speed)

4000rpm

最大輸入轉速
(Maximum input speed)

8000rpm

背隙
(Dorsal gap)P1 ≤3arcmin
P2 ≤5arcmin容許徑向力
(Allowable radial force)

3250N

容許軸向力
(Allowable axial force)

1625N

使用壽命
(Service life)

20000hr

效率
(Efficiency)

≥97%

使用溫度範圍
(Operating temperature range)

-10°C~90°C

防護等級
(protection class)

IP65

噪音值
(Noise value)

≤60dB

安裝方式
(Installation DIRECTION)

任意(Arbitrarily)

減速比
(Speed ratio)

3

4

5

7

10

額定輸出力矩
(Rated output torque)

130Nm

140Nm

160Nm

140Nm

100Nm

2021-2-1

00初版

陳國棟

改版
SYM年月日
DATE變更事項
REVISIONS設計
BY備注
NOTE制圖
PRAWN設計
DESIGNED品名:
TITLE精密行星減速機
Precision Planetary Gear Reducer規格:
SPEC

GPB090-L1-(19-70-90-M6)

吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4