
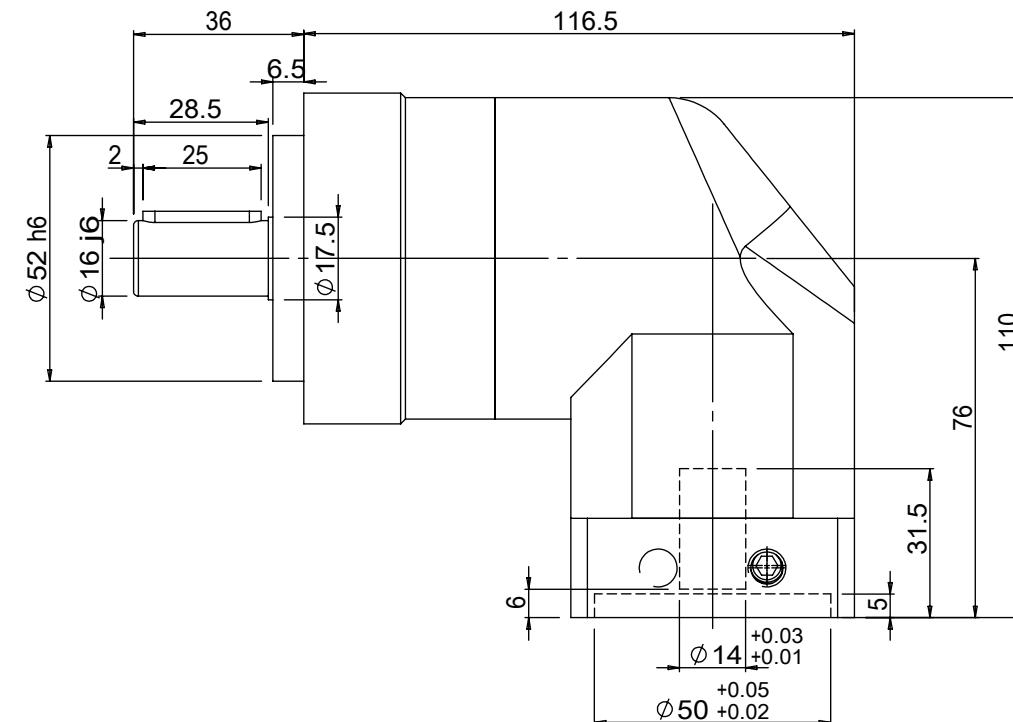
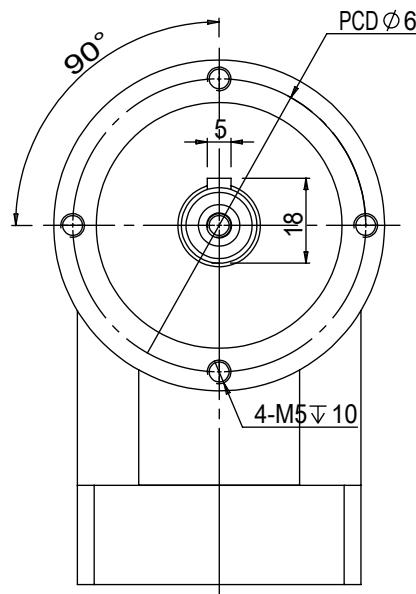


輸出端(output)

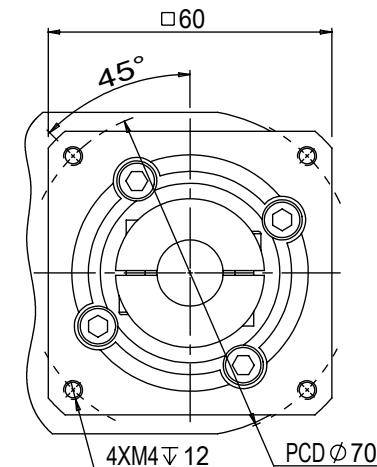

輸入端(input)

急停扭矩
(Emergency Stop Torque)3倍額定輸出力矩
(3 times rated output torque)額定輸入轉速
(Rated input speed)

5000rpm

最大輸入轉速
(Maximum input speed)

10000rpm

背隙
(Dorsal gap)

P1 ≤6arcmin

P2 ≤9arcmin

容許徑向力
(Allowable radial force)

1530N

容許軸向力
(Allowable axial force)

765N

使用壽命
(Service life)

20000hr

效率
(Efficiency)

≥95%

使用溫度範圍
(Operating temperature range)

-10°C~90°C

防護等級
(protection class)

IP65

噪音值
(Noise value)

≤63dB

安裝方式
(Installation DIRECTION)

任意(Arbitrarily)

減速比
(Speed ratio)

3

4

5

7

10

14

20

額定輸出力矩
(Rated output torque)

36Nm

48Nm

60Nm

50Nm

40Nm

50Nm

40Nm

改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE
---	2018-12-26	00初版	陳國棟	

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPER070-L1-(14-50-70-M4)
		吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	A4