

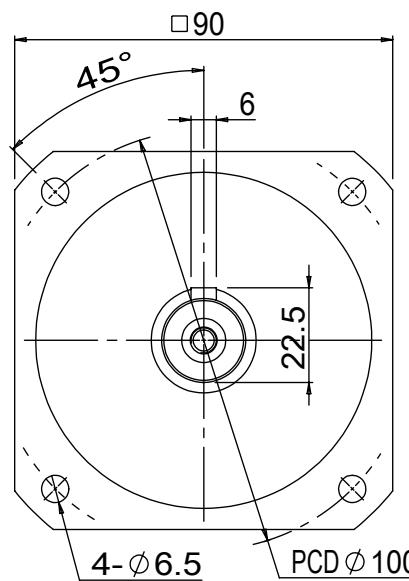


輸出端(output)

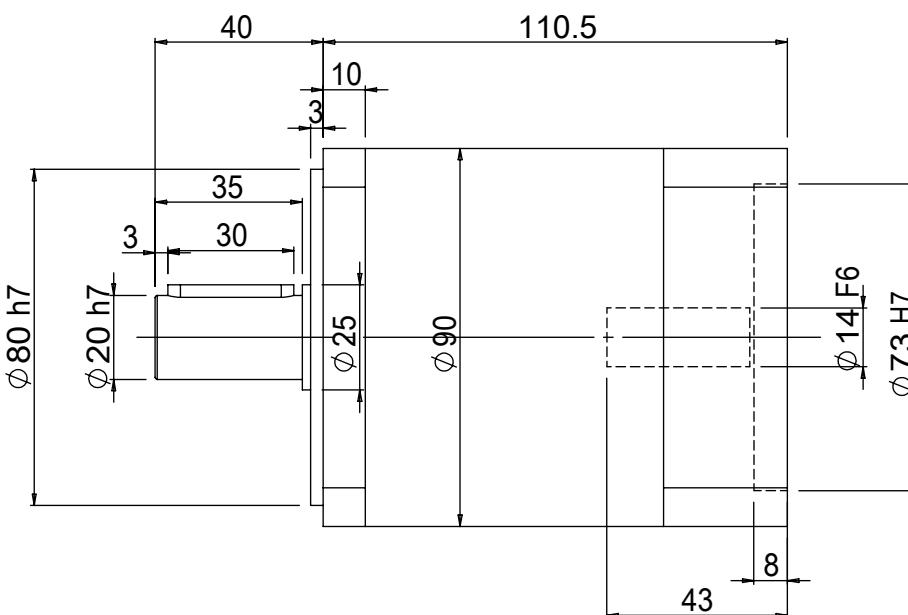

輸入端(input)

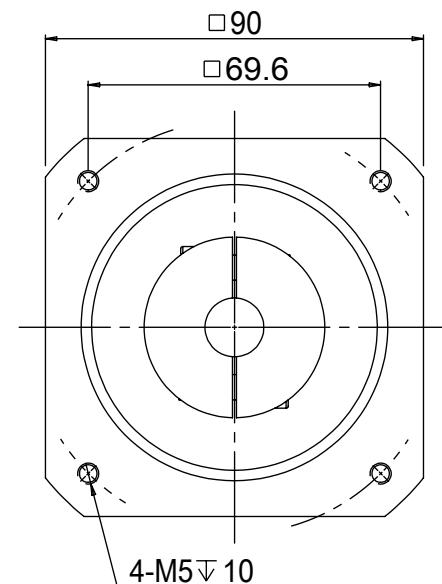

A

A

B

B

C

C

急停扭矩 (Emergency Stop Torque)	2倍額定輸出力矩 (2 times rated output torque)
額定輸入轉速 (Rated input speed)	3000rpm
背隙 (Dorsal gap)	$\leqslant 8\text{arcmin}$
容許徑向力 (Allowable radial force)	1050N
容許軸向力 (Allowable axial force)	850N
使用壽命 (Service life)	20000h
效率 (Efficiency)	$\geqslant 96\%$
使用溫度範圍 (Operating temperature range)	-25°C ~ 90°C
防護等級 (protection class)	IP65
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	3	4	5	7	10
額定輸出力矩 (Rated output torque)	60Nm	88Nm	95Nm	66Nm	40Nm

---	2018-12-26	00初版	陳國棟	
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY	備注 NOTE

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPF090-L1-(14-73-□69.6-M5)
G+ ® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd			A4