

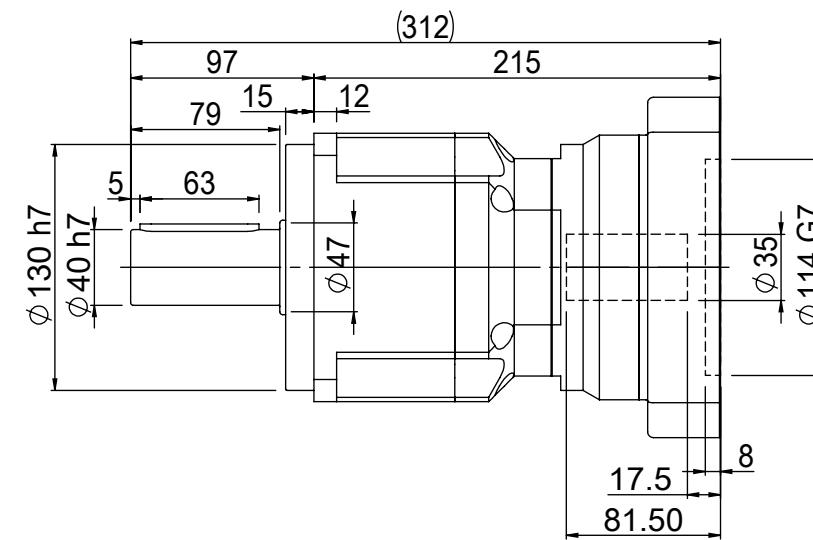


## 輸出端(output)

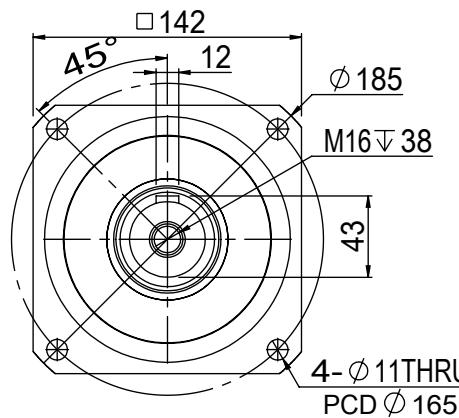

## 輸入端(input)

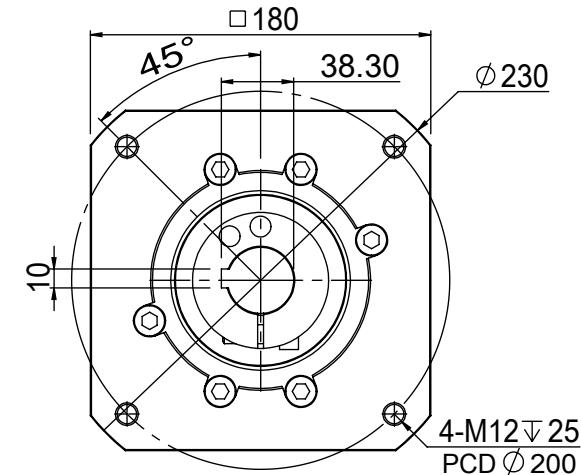

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)	
額定輸入轉速 (Rated input speed)	3000rpm	
最大輸入轉速 (Maximum input speed)	6000rpm	
背隙 (Dorsal gap)	P1	$\leq$ 5arcmin
	P2	$\leq$ 8arcmin
容許徑向力 (Allowable radial force)	9400N	
容許軸向力 (Allowable axial force)	4700N	
使用壽命 (Service life)	20000hr	
效率 (Efficiency)	$\geq$ 94%	
使用溫度範圍 (Operating temperature range)	-10°C ~ 90°C	
防護等級 (protection class)	IP65	
噪音值 (Noise value)	$\leq$ 65dB	
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)	

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100
額定輸出力矩 (Rated output torque)	342Nm	542Nm	650Nm	600Nm	550Nm	500Nm	650Nm	550Nm	450Nm

---	2018-12-26	00初版	陳國棟
改版 SYM	年月日 DATE	變更事項 REVISIONS	設計 BY

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
-------------	----------------	--------------	---

規格: SPEC	GPB142-L2-(35-114.3-200-M12)
-------------	------------------------------

<b>G+</b> ® 吉嘉精密科技有限公司 GIGA Precision Technology Co., Ltd	A4
---	----