

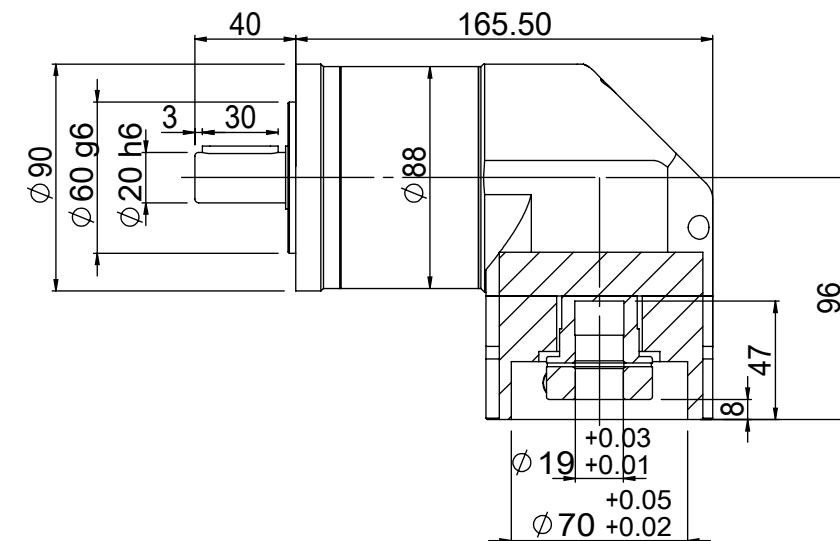


輸出端(output)

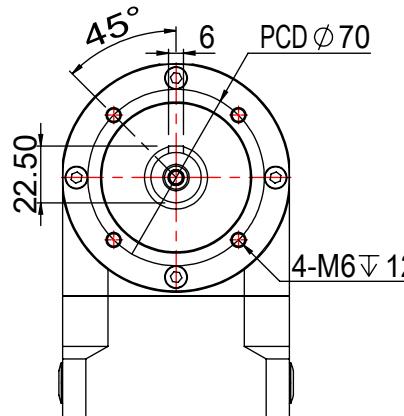

輸入端(input)

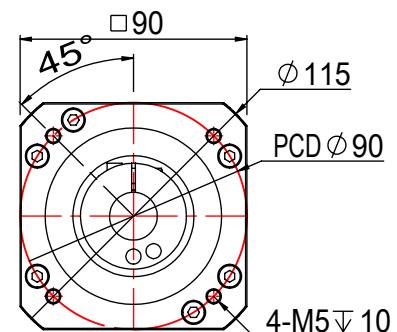

A

A

B

B

C

C

急停扭矩 (Emergency Stop Torque)	3倍額定輸出力矩 (3 times rated output torque)
額定輸入轉速 (Rated input speed)	3500rpm
背隙 (Dorsal gap)	$\leq 12\text{arcmin}$
容許徑向力 (Allowable radial force)	400N
容許軸向力 (Allowable axial force)	420N
使用壽命 (Service life)	10000hr
效率 (Efficiency)	$\geq 93\%$
使用溫度範圍 (Operating temperature range)	-10°C ~ 80°C
防護等級 (protection class)	IP65
噪音值 (Noise value)	$\leq 63\text{dB}$
安裝方式 (Installation DIRECTION)	任意(Arbitrarily)

減速比 (Speed ratio)	15	20	25	30	35	40	50	70	100	140	200
額定輸出力矩 (Rated output torque)	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	90Nm	55Nm	22Nm
---	2018-12-26	00初版									
改版 SYM	年月日 DATE	變更事項 REVISIONS									
		設計 BY	備注 NOTE								

制圖 PRAWN	設計 DESIGNED	品名: TITLE	精密行星減速機 Precision Planetary Gear Reducer
		規格: SPEC	GPLR090-L2- (19-70-90-M5)



吉嘉精密科技有限公司
GIGA Precision Technology Co., Ltd

A4